



***Dreamcast SH4  
Program Manual***





# ***Table of Contents***

---

<b>1. Overview .....</b>	<b>HPM-1</b>
SH7091 Features .....	HPM-1
Block Diagram .....	HPM-5
<b>2. Programming Model .....</b>	<b>HPM-7</b>
Data Formats .....	HPM-7
Register Configuration .....	HPM-7
Privileged Mode and Banks .....	HPM-7
General Registers .....	HPM-10
Floating-Point Registers .....	HPM-11
Control Registers .....	HPM-12
System Registers .....	HPM-14
Memory-Mapped Registers .....	HPM-15
Data Format in Registers .....	HPM-15
Data Formats in Memory .....	HPM-16
Processor States .....	HPM-16
Processor Modes .....	HPM-18

<b>3. Memory Management Unit (MMU)</b>	<b>HPM-19</b>
<b>Overview</b>	<b>HPM-19</b>
Features	HPM-19
Role of the MMU	HPM-19
Register Configuration	HPM-21
Caution	HPM-21
<b>Register Descriptions</b>	<b>HPM-21</b>
<b>Memory Space</b>	<b>HPM-25</b>
Physical Memory Space	HPM-25
External Memory Space	HPM-27
Virtual Memory Space	HPM-27
On-Chip RAM Space	HPM-28
Address Translation	HPM-29
Single Virtual Memory Mode and Multiple Virtual Memory Mode	HPM-29
Address Space Identifier (ASID)	HPM-29
<b>TLB Functions</b>	<b>HPM-30</b>
Unified TLB (UTLB) Configuration	HPM-30
Instruction TLB (ITLB) Configuration	HPM-32
Address Translation Method	HPM-33
<b>MMU Functions</b>	<b>HPM-35</b>
MMU Hardware Management	HPM-35
MMU Software Management	HPM-35
MMU Instruction (LDTLB)	HPM-35
Hardware ITLB Miss Handling	HPM-36
Avoiding Synonym Problems	HPM-36
<b>MMU Exceptions</b>	<b>HPM-37</b>
Instruction TLB Multiple Hit Exception	HPM-37
Instruction TLB Miss Exception	HPM-38
Instruction TLB Protection Violation Exception	HPM-39
Data TLB Multiple Hit Exception	HPM-39
Data TLB Miss Exception	HPM-40
Data TLB Protection Violation Exception	HPM-40
Initial Page Write Exception	HPM-41
<b>Memory-Mapped TLB Configuration</b>	<b>HPM-42</b>
ITLB Address Array	HPM-42
ITLB Data Array 1	HPM-43
ITLB Data Array 2	HPM-44
UTLB Address Array	HPM-44
UTLB Data Array 1	HPM-45
UTLB Data Array 2	HPM-46

<b>4. Caches</b>	<b>HPM-47</b>
Overview	HPM-47
Features	HPM-47
Register Configuration	HPM-48
Register Descriptions	HPM-48
Operand Cache (OC)	HPM-50
Configuration	HPM-50
Read Operation	HPM-52
Write Operation	HPM-52
Write-Back Buffer	HPM-53
Write-Through Buffer	HPM-53
RAM Mode	HPM-54
OC Index Mode	HPM-54
Coherency between Cache and External Memory	HPM-55
Prefetch Operation	HPM-55
Instruction Cache (IC)	HPM-55
Configuration	HPM-55
Read Operation	HPM-57
IC Index Mode	HPM-57
Memory-Mapped Cache Configuration	HPM-57
IC Address Array	HPM-58
IC Data Array	HPM-59
OC Address Array	HPM-59
OC Data Array	HPM-60
Store Queues	HPM-61
SQ Configuration	HPM-61
SQ Writes	HPM-62
Transfer to External Memory	HPM-62
SQ Protection	HPM-63
 <b>5. Exceptions</b>	 <b>HPM-65</b>
Overview	HPM-65
Features	HPM-65
Register Configuration	HPM-65
Register Descriptions	HPM-66
Exception Handling Functions	HPM-67
Exception Handling Flow	HPM-67
Exception Handling Vector Addresses	HPM-67
Exception Types and Priorities	HPM-68
Exception Flow	HPM-71
Exception Flow	HPM-71
Exception Source Acceptance	HPM-72
Exception Requests and BL Bit	HPM-73
Return from Exception Handling	HPM-74

<b>Description of Exceptions .....</b>	<b>HPM-74</b>
Resets .....	HPM-74
Power-On Reset .....	HPM-74
Manual Reset .....	HPM-75
Hitachi-UDI Reset .....	HPM-76
Instruction TLB Multiple-Hit Exception .....	HPM-76
Operand TLB Multiple-Hit Exception .....	HPM-77
General Exceptions .....	HPM-78
Data TLB Miss Exception .....	HPM-78
Instruction TLB Miss Exception .....	HPM-78
Initial Page Write Exception .....	HPM-79
Data TLB Protection Violation Exception .....	HPM-79
Instruction TLB Protection Violation Exception .....	HPM-80
Data Address Error .....	HPM-81
Instruction Address Error .....	HPM-82
Unconditional Trap .....	HPM-82
General Illegal Instruction Exception .....	HPM-83
Slot Illegal Instruction Exception .....	HPM-83
General FPU Disable Exception .....	HPM-84
Slot FPU Disable Exception .....	HPM-84
User Breakpoint Trap .....	HPM-85
FPU Exception .....	HPM-86
Interrupts .....	HPM-86
NMI .....	HPM-86
IRL Interrupts .....	HPM-86
Peripheral Module Interrupts .....	HPM-87
Priority Order with Multiple Exceptions .....	HPM-88
<b>Usage Notes .....</b>	<b>HPM-89</b>
 <b>6. Floating-Point Unit .....</b>	 <b>HPM-91</b>
<b>Overview .....</b>	<b>HPM-91</b>
<b>Data Formats .....</b>	<b>HPM-91</b>
Floating-Point Format .....	HPM-91
Non-Numbers (NaN) .....	HPM-93
Denormalized Numbers .....	HPM-94
<b>Registers .....</b>	<b>HPM-94</b>
Floating-Point Registers .....	HPM-94
Floating-Point Status/Control Register (FPSCR) .....	HPM-96
Floating-Point Communication Register (FPUL) .....	HPM-97
<b>Rounding .....</b>	<b>HPM-98</b>
<b>Floating-Point Exceptions .....</b>	<b>HPM-98</b>
<b>Graphics Support Functions .....</b>	<b>HPM-99</b>
Geometric Operation Instructions .....	HPM-99
Pair Single-Precision Data Transfer .....	HPM-100

<b>7. Instruction Set .....</b>	<b>HPM-101</b>
Execution Environment .....	HPM-101
Addressing Modes .....	HPM-102
Instruction Set .....	HPM-106
 <b>8. Pipelining .....</b>	 <b>HPM-119</b>
Pipelines .....	HPM-119
Parallel-Executability .....	HPM-126
Execution Cycles and Pipeline Stalling .....	HPM-130
 <b>9. Power-Down Modes .....</b>	 <b>HPM-147</b>
Overview .....	HPM-147
Types of Power-Down Modes .....	HPM-147
Register Configuration .....	HPM-148
Register Descriptions .....	HPM-149
Standby Control Register (STBCR) .....	HPM-149
Peripheral Module Pin High Impedance Control .....	HPM-151
Peripheral Module Pin Pull-Up Control .....	HPM-151
Standby Control Register 2 (STBCR2) .....	HPM-152
Sleep Mode .....	HPM-152
Transition to Sleep Mode .....	HPM-152
Exit from Sleep Mode .....	HPM-153
Deep Sleep Mode .....	HPM-153
Transition to Deep Sleep Mode .....	HPM-153
Exit from Deep Sleep Mode .....	HPM-153
Standby Mode .....	HPM-153
Transition to Standby Mode .....	HPM-153
Exit from Standby Mode .....	HPM-155
Clock Pause Function .....	HPM-155
Module Standby Function .....	HPM-156
Transition to Module Standby Function .....	HPM-156
Exit from Module Standby Function .....	HPM-156
 <b>10. Instruction Descriptions .....</b>	 <b>HPM-157</b>

**11. Realtime Clock (RTC) ..... HPM-299****Overview .....HPM-299**

Features .....	HPM-299
Block Diagram .....	HPM-300
Pin Configuration .....	HPM-301
Register Configuration .....	HPM-302

**Register Descriptions .....HPM-303**

64 Hz Counter (R64CNT) .....	HPM-303
Second Counter (RSECCNT) .....	HPM-303
Minute Counter (RMINCNT) .....	HPM-304
Hour Counter (RHRCNT) .....	HPM-304
Day-of-Week Counter (RWKCNT) .....	HPM-305
Day Counter (RDAYCNT) .....	HPM-305
Month Counter (RMONCNT) .....	HPM-306
Year Counter (RYRCNT) .....	HPM-306
Second Alarm Register (RSECAR) .....	HPM-307
Minute Alarm Register (RMINAR) .....	HPM-307
Hour Alarm Register (RHRAR) .....	HPM-308
Day-of-Week Alarm Register (RWKAR) .....	HPM-308
Day Alarm Register (RDAYAR) .....	HPM-309
Month Alarm Register (RMONAR) .....	HPM-309
RTC Control Register 1 (RCR1) .....	HPM-310
RTC Control Register 2 (RCR2) .....	HPM-311

**Operation .....HPM-313**

Time Setting Procedures .....	HPM-313
Time Reading Procedures .....	HPM-314
Alarm Function .....	HPM-315

**Interrupts .....HPM-315****12. Timer Unit (TMU) ..... HPM-317****Overview .....HPM-317**

Features .....	HPM-317
Block Diagram .....	HPM-318
Pin Configuration .....	HPM-318
Register Configuration .....	HPM-319

**Register Descriptions .....HPM-320**

Timer Output Control Register (TOCR) .....	HPM-320
Timer Start Register (TSTR) .....	HPM-320
Timer Constant Registers (TCOR) .....	HPM-321
Timer Counters (TCNT) .....	HPM-322
Timer Control Registers (TCR) .....	HPM-322
Input Capture Register (TCPR2) .....	HPM-326



<b>Operation .....</b>	<b>HPM-326</b>
Counter Operation .....	HPM-326
TCNT Count Timing: .....	HPM-328
Input Capture Function .....	HPM-329
<b>Interrupts .....</b>	<b>HPM-330</b>
<b>Usage Notes .....</b>	<b>HPM-331</b>
Register Writes .....	HPM-331
TCNT Register Reads .....	HPM-331
Resetting the RTC Frequency Divider .....	HPM-331
External Clock Frequency .....	HPM-331
 <b>A. User's Manual Supplement HPM-333</b>	
Address List .....	HPM-333
 <b>B. Instruction Prefetch Side Effects HPM-341</b>	
Instruction Prefetch Side Effects .....	HPM-341
Remedies .....	HPM-341





# ***1. Overview***

---

## **1.1 SH7091 Features**

The SH7091 is a 32-bit RISC (reduced instruction set computer) microprocessor, featuring object code upward-compatibility with SH-1, SH-2, SH-3, and SH-3E microcomputers. It includes an 8-kbyte instruction cache, a 16-kbyte operand cache with a choice of copy-back or write-through mode, and an MMU (memory management unit) with a 64-entry fully-associative unified TLB (translation lookaside buffer).

The SH7091 has an on-chip bus state controller (BSC) that allows direct connection to DRAM and synchronous DRAM without external circuitry. Its 16-bit fixed-length instruction set enables program code size to be reduced by almost 50% compared with 32-bit instructions.

The features of the SH7091 are summarized in table 1.

Table 1.1 SH7091 Features

Item	Features
LSI	<ul style="list-style-type: none"><li>• Operating frequency: 200 MHz</li><li>• Performance:<ul style="list-style-type: none"><li>—360 MIPS (200 MHz)</li><li>—1.4 GFLOPS (200 MHz)</li></ul></li><li>• Superscalar architecture: Parallel execution of two instructions</li><li>• Voltage: 1.8 V (internal), 3.3 V (I/O)</li><li>• Packages: 256-pin BGA, 208-pin QFP</li><li>• External buses<ul style="list-style-type: none"><li>—Separate 26-bit address and 64-bit data buses</li><li>—External bus frequency of 1/2, 1/3, 1/4, 1/6, or 1/8 times internal bus frequency</li></ul></li></ul>
CPU	<ul style="list-style-type: none"><li>• Original Hitachi SH architecture</li><li>• 32-bit internal data bus</li><li>• General register file:<ul style="list-style-type: none"><li>—Sixteen 32-bit general registers (and eight 32-bit shadow registers)</li><li>—Seven 32-bit control registers</li><li>—Four 32-bit system registers</li></ul></li><li>• RISC-type instruction set (upward-compatible with SH Series)<ul style="list-style-type: none"><li>—Fixed 16-bit instruction length for improved code efficiency</li><li>—Load-store architecture</li><li>—Delayed branch instructions</li><li>—Conditional execution</li><li>—C-based instruction set</li></ul></li><li>• Superscalar architecture (providing simultaneous execution of two instructions) including FPU</li><li>• Instruction execution time: Maximum 2 instructions/cycle</li><li>• Virtual address space: 4 Gbytes (448-Mbyte external memory space)</li><li>• Space identifier ASIDs: 8 bits, 256 virtual address spaces</li><li>• On-chip multiplier</li><li>• Five-stage pipeline</li></ul>
FPU	<ul style="list-style-type: none"><li>• On-chip floating-point coprocessor</li><li>• Supports single-precision (32 bits) and double-precision (64 bits)</li><li>• Supports IEEE754-compliant data types and exceptions</li><li>• Two rounding modes: Round to Nearest and Round to Zero</li><li>• Handling of denormalized numbers: Truncation to zero or interrupt generation for compliance with IEEE754</li><li>• Floating-point registers: 32 bits x 16 words x 2 banks (single-precision x 16 words or double-precision x 8 words) x 2 banks</li><li>• 32-bit CPU-FPU floating-point communication register (FPUL)</li><li>• Supports FMAC (multiply-and-accumulate) instruction</li><li>• Supports FDIV (divide) and FSQRT (square root) instructions</li><li>• Supports FLDI0/FLDI1 (load constant 0/1) instructions</li><li>• Instruction execution times<ul style="list-style-type: none"><li>—Latency (FMAC/FADD/FSUB/FMUL): 3 cycles (single-precision), 8 cycles (double-precision)</li><li>—Pitch (FMAC/FADD/FSUB/FMUL): 1 cycle (single-precision), 6 cycles (double-precision)</li></ul></li></ul> <p>Note: FMAC is supported for single-precision only.</p> <ul style="list-style-type: none"><li>• 3-D graphics instructions (single-precision only):<ul style="list-style-type: none"><li>—4-dimensional vector conversion and matrix operations (FTRV): 4 cycles (pitch), 7 cycles (latency)</li><li>—4-dimensional vector (FIPR) inner product: 1 cycle (pitch), 4 cycles (latency)</li></ul></li><li>• Five-stage pipeline</li></ul>


Item	Features
Clock pulse generator (CPG)	<ul style="list-style-type: none"><li>• Choice of main clock: 1/2, 1, 3, or 6 times EXTAL</li><li>• Clock modes:<ul style="list-style-type: none"><li>—CPU frequency: 1, 1/2, 1/3, 1/4, 1/6, or 1/8 times main clock: maximum 200 MHz</li><li>—Bus frequency: 1/2, 1/3, 1/4, 1/6, or 1/8 times main clock: maximum 100 MHz</li><li>—Peripheral frequency: 1/2, 1/3, 1/4, 1/6, or 1/8 times main clock: maximum 50 MHz</li></ul></li><li>• Power-down modes<ul style="list-style-type: none"><li>—Sleep mode</li><li>—Standby mode</li><li>—Module standby function</li></ul></li><li>• Single-channel watchdog timer</li></ul>
Memory management unit (MMU)	<ul style="list-style-type: none"><li>• 4-Gbyte address space, 256 address space identifiers (8-bit ASIDs)</li><li>• Single virtual mode and multiple virtual memory mode</li><li>• Supports multiple page sizes: 1 kbyte, 4 kbytes, 64 kbytes, 1 Mbyte</li><li>• 4-entry fully-associative TLB for instructions</li><li>• 64-entry fully-associative TLB for instructions and operands</li><li>• Supports software-controlled replacement and random-counter replacement algorithm</li><li>• TLB contents can be accessed directly by address mapping</li></ul>
Cache memory	<ul style="list-style-type: none"><li>• Instruction cache (IC)<ul style="list-style-type: none"><li>—8 kbytes, direct mapping</li><li>—256 entries, 32-byte block length</li><li>—Normal mode (8-kbyte cache)</li><li>—Index mode</li></ul></li><li>• Operand cache (OC)<ul style="list-style-type: none"><li>—16 kbytes, direct mapping</li><li>—512 entries, 32-byte block length</li><li>—Normal mode (16-kbyte cache)</li><li>—Index mode</li><li>—RAM mode (8-kbyte cache + 8-kbyte RAM)</li><li>—Choice of write method (copy-back or write-through)</li></ul></li><li>• Single-stage copy-back buffer, single-stage write-through buffer</li><li>• Cache memory contents can be accessed directly by address mapping (usable as on-chip memory)</li><li>• Store queue (32 bytes x 2 entries)</li></ul>
Interrupt controller (INTC)	<ul style="list-style-type: none"><li>• Five independent external interrupts (NMI, IRL3 to IRL0)</li><li>• 15-level signed external interrupts: IRL3 to IRL0</li><li>• On-chip peripheral module interrupts: Priority level can be set for each module</li></ul>
User break controller (UBC)	<ul style="list-style-type: none"><li>• Supports debugging by means of user break interrupts</li><li>• Two break channels</li><li>• Address, data value, access type, and data size can all be set as break conditions</li><li>• Supports sequential break function</li></ul>
Bus state controller (BSC)	<ul style="list-style-type: none"><li>• Supports external memory access<ul style="list-style-type: none"><li>—64/32/16/8-bit external data bus</li></ul></li><li>• External memory space divided into seven areas, each of up to 64 Mbytes, with the following parameters settable for each area:<ul style="list-style-type: none"><li>—Bus size (8, 16, 32, or 64 bits)</li><li>—Number of wait cycles (hardware wait function also supported)</li><li>—Direct connection of DRAM, synchronous DRAM, and burst ROM possible by setting space type</li><li>—Supports fast page mode and DRAM EDO</li><li>—Supports PCMCIA interface</li><li>—Chip select signals (CS0 to CS6) output for relevant areas</li></ul></li><li>• DRAM/synchronous DRAM refresh functions<ul style="list-style-type: none"><li>—Programmable refresh interval</li><li>—Supports CAS-before-RAS refresh mode and self-refresh mode</li></ul></li><li>• DRAM/synchronous DRAM burst access function</li><li>• Big endian or little endian mode can be set</li></ul>

Item	Features
Direct memory access controller (DMAC)	<ul style="list-style-type: none"><li>• 4-channel physical address DMA controller</li><li>• Transfer data size: 8, 16, 32, or 64 bits, or 32 bytes</li><li>• Address modes:<ul style="list-style-type: none"><li>—1-bus-cycle single address mode</li><li>—2-bus-cycle dual address mode</li></ul></li><li>• Transfer requests: External, on-chip module, or auto-requests</li><li>• Bus modes: Cycle-steal or burst mode</li><li>• Supports on-demand data transfer</li></ul>
Timer unit (TMU)	<ul style="list-style-type: none"><li>• 3-channel auto-reload 32-bit timer</li><li>• Input capture function</li><li>• Choice of seven counter input clocks</li></ul>
Realtime clock (RTC)	<ul style="list-style-type: none"><li>• On-chip clock and calendar functions</li><li>• Built-in 32 kHz crystal oscillator with maximum 1/256 second resolution (cycle interrupts)</li></ul>
Serial communication interface (SCI, SCIF)	<ul style="list-style-type: none"><li>• Two full-duplex communication channels (SCI, SCIF)</li><li>• Channel 1 (SCI):<ul style="list-style-type: none"><li>—Choice of asynchronous mode or synchronous mode</li><li>—Supports smart card interface</li></ul></li><li>• Channel 2 (SCIF):<ul style="list-style-type: none"><li>—Supports asynchronous mode</li><li>—Separate 16-byte FIFOs provided for transmitter and receiver</li></ul></li></ul>
Packages	<ul style="list-style-type: none"><li>• 256-pin BGA, 208-pin QFP</li></ul>

## 1.1.1 Block Diagram

Figure 1.1 shows an internal block diagram of the SH7091.

**Figure 1.1** Block Diagram of SH7091 Functions

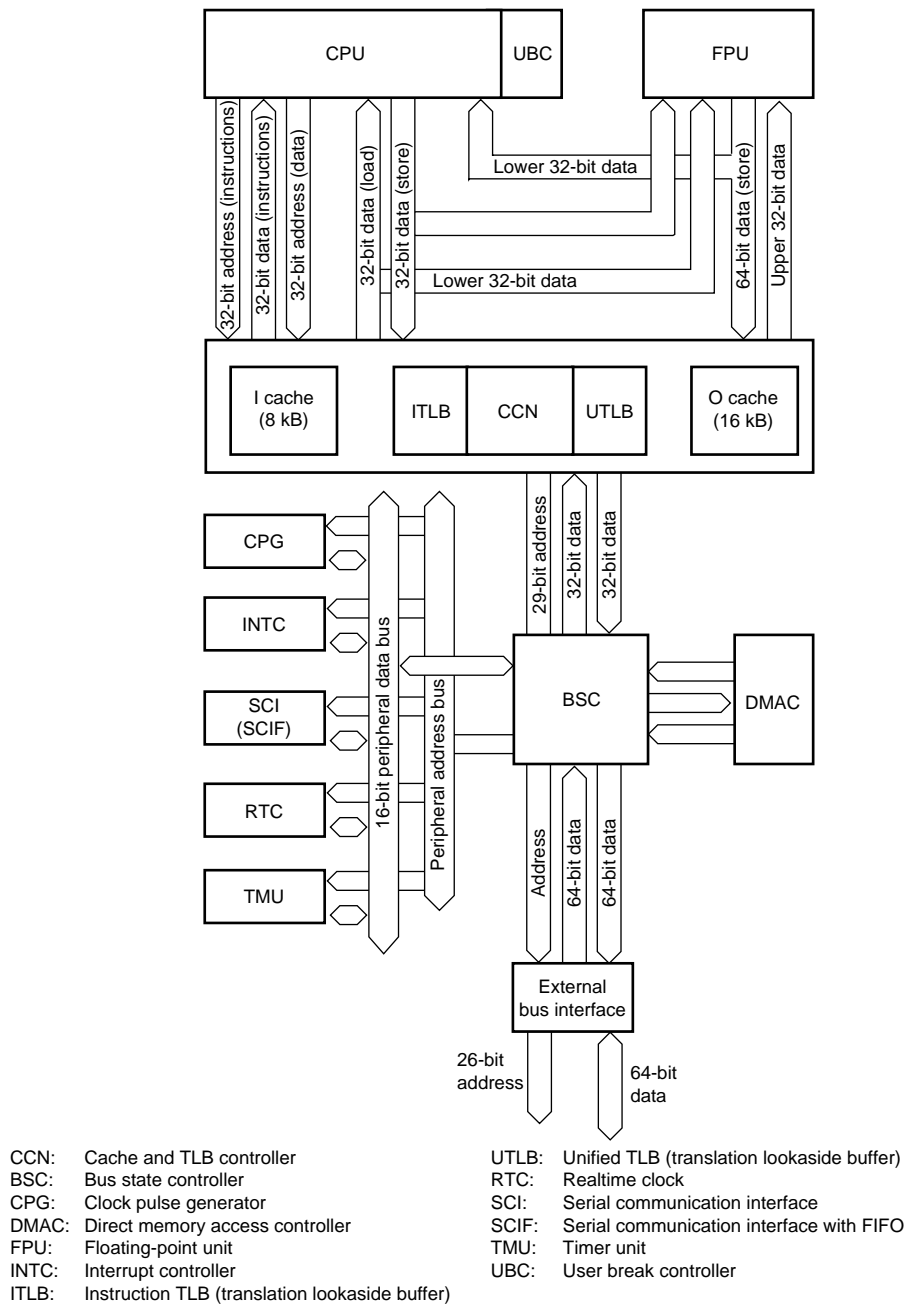








## 2. Programming Model

---

### 2.1 Data Formats

The data formats handled by the SH7091 are shown in figure 1.

Figure 2.1 Data Formats

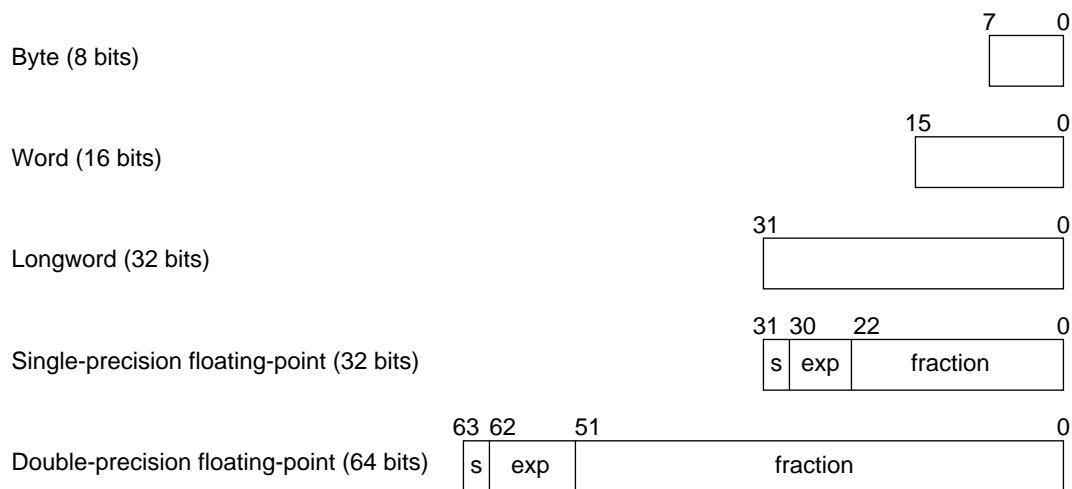

### 2.2 Register Configuration

#### 2.2.1 Privileged Mode and Banks

**Processor Modes:** The SH7091 has two processor modes, user mode and privileged mode. The SH7091 normally operates in user mode, and switches to privileged mode when an exception occurs or an interrupt is accepted. There are four kinds of registers—general registers, system registers, control registers, and floating-point registers—and the registers that can be accessed differ in the two processor modes.

**General Registers:** There are 16 general registers, designated R0 to R15. General registers R0 to R7 are banked registers which are switched by a processor mode change.

In privileged mode, the register bank bit (RB) in the status register (SR) defines which banked register set is accessed as general registers, and which set is accessed only through the load control register (LDC) and store control register (STC) instructions.

When the RB bit is 1 (that is, when bank 1 is selected), the 16 registers comprising bank 1 general registers R0\_BANK1 to R7\_BANK1 and non-banked general registers R8 to R15 can be accessed as general registers R0 to R15. In this case, the eight registers comprising bank 0 general registers R0\_BANK0 to R7\_BANK0 are accessed by the LDC/STC instructions. When the RB bit is 0 (that is, when bank 0 is selected), the 16 registers comprising bank 0 general registers R0\_BANK0 to R7\_BANK0 and non-banked general registers R8 to R15 can be accessed as general registers R0 to R15. In this case, the eight registers comprising bank 1 general registers R0\_BANK1 to R7\_BANK1 are accessed by the LDC/STC instructions.

In user mode, the 16 registers comprising bank 0 general registers R0\_BANK0 to R7\_BANK0 and non-banked general registers R8 to R15 can be accessed as general registers R0 to R15. The eight registers comprising bank 1 general registers R0\_BANK1 to R7\_BANK1 cannot be accessed.

**Control Registers:** Control registers comprise the global base register (GBR) and status register (SR), which can be accessed in both processor modes, and the saved status register (SSR), saved program counter (SPC), vector base register (VBR), saved general register 15 (SGR), and debug base register (DBR), which can only be accessed in privileged mode. Some bits of the status register (such as the RB bit) can only be accessed in privileged mode.

**System Registers:** System registers comprise the multiply-and-accumulate registers (MACH/MACL), the procedure register (PR), the program counter (PC), the floating-point status/control register (FPSCR), and the floating-point communication register (FPUL). Access to these registers does not depend on the processor mode.

**Floating-Point Registers:** There are thirty-two floating-point registers, FR0–FR15 and XF0–XF15. FR0–FR15 and XF0–XF15 can be assigned to either of two banks (FPR0\_BANK0–FPR15\_BANK0 or FPR0\_BANK1–FPR15\_BANK1).

FR0–FR15 can be used as the eight registers DR0/2/4/6/8/10/12/14 (double-precision floating-point registers, or pair registers) or the four registers FV0/4/8/12 (register vectors), while XF0–XF15 can be used as the eight registers XD0/2/4/6/8/10/12/14 (register pairs) or register matrix XMTRX.

Register values after a reset are shown in table 2.1.

**Table 2.1 Initial Register Values**


Type	Registers	Initial Value*
General registers	R0_BANK0–R7_BANK0, R0_BANK1–R7_BANK1, R8–R15	Undefined
Control registers	SR	MD bit = 1, RB bit = 1, BL bit = 1, FD bit = 0, I3–I0 = 1111 (H'F), reserved bits = 0, others undefined
	GBR, SSR, SPC, SGR, DBR	Undefined
	VBR	H'00000000
System registers	MACH, MACL, PR, FPUL	Undefined
	PC	H'A0000000
	FPSCR	H'00040001
Floating-point registers	FR0–FR15, XF0–XF15	Undefined

**Note:** \*Initialized by a power-on reset and manual reset.

The register configuration in each processor is shown in figure 2.2.

Switching between user mode and privileged mode is controlled by the processor mode bit (MD) in the status register.

**Figure 2.2** CPU Register Configuration in Each Processor Mode

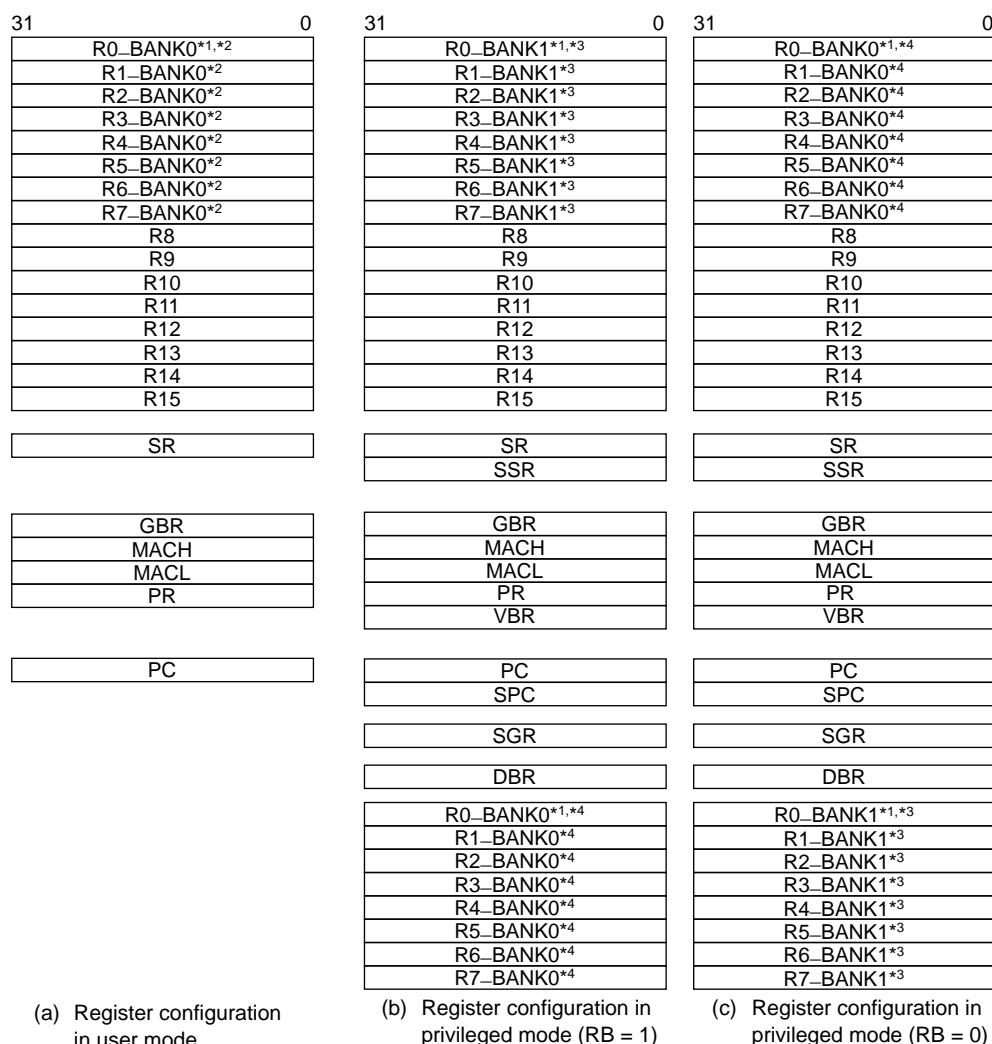

- Notes:
1. The R0 register is used as the index register in indexed register-indirect addressing mode and indexed GBR indirect addressing mode.
  2. Banked registers
  3. Banked registers  
Accessed as general registers when the RB bit is set to 1 in the SR register. Accessed only by LDC/STC instructions when the RB bit is cleared to 0.
  4. Banked registers  
Accessed as general registers when the RB bit is cleared to 0 in the SR register. Accessed only by LDC/STC instructions when the RB bit is set to 1.

## 2.2.2 General Registers

Figure 2.3 shows the relationship between the processor modes and general registers. The SH7091 has twenty-four 32-bit general registers (R0\_BANK0–R7\_BANK0, R0\_BANK1–R7\_BANK1, and R8–R15). However, only 16 of these can be accessed as general registers R0–R15 in one processor mode. The SH7091 has two processor modes, user mode and privileged mode, in which R0–R7 are assigned as shown below.

- R0\_BANK0–R7\_BANK0

In user mode (SR.MD = 0), R0–R7 are always assigned to R0\_BANK0–R7\_BANK0.

In privileged mode (SR.MD = 1), R0–R7 are assigned to R0\_BANK0–R7\_BANK0 only when SR.RB = 0.

- R0\_BANK1–R7\_BANK1

In user mode, R0\_BANK1–R7\_BANK1 cannot be accessed.

In privileged mode, R0–R7 are assigned to R0\_BANK1–R7\_BANK1 only when SR.RB = 1.

**Figure 2.3** General Registers

SR.MD = 0 or (SR.MD = 1, SR.RB = 0)		(SR.MD = 1, SR.RB = 1)
R0	R0_BANK0	R0_BANK0
R1	R1_BANK0	R1_BANK0
R2	R2_BANK0	R2_BANK0
R3	R3_BANK0	R3_BANK0
R4	R4_BANK0	R4_BANK0
R5	R5_BANK0	R5_BANK0
R6	R6_BANK0	R6_BANK0
R7	R7_BANK0	R7_BANK0
R0_BANK1	R0_BANK1	R0
R1_BANK1	R1_BANK1	R1
R2_BANK1	R2_BANK1	R2
R3_BANK1	R3_BANK1	R3
R4_BANK1	R4_BANK1	R4
R5_BANK1	R5_BANK1	R5
R6_BANK1	R6_BANK1	R6
R7_BANK1	R7_BANK1	R7
R8	R8	R8
R9	R9	R9
R10	R10	R10
R11	R11	R11
R12	R12	R12
R13	R13	R13
R14	R14	R14
R15	R15	R15

**Programming Note:** As the user's R0–R7 are assigned to R0\_BANK0–R7\_BANK0, and after an exception or interrupt R0–R7 are assigned to R0\_BANK1–R7\_BANK1, it is not necessary for the interrupt handler to save and restore the user's R0–R7 (R0\_BANK0–R7\_BANK0).

After a reset, the values of R0\_BANK0–R7\_BANK0, R0\_BANK1–R7\_BANK1, and R8–R15 are undefined.

## 2.2.3 Floating-Point Registers

Figure 2.4 shows the floating-point registers. There are thirty-two 32-bit floating-point registers, divided into two banks (FPR0\_BANK0–FPR15\_BANK0 and FPR0\_BANK1–FPR15\_BANK1). These 32 registers are referenced as FR0–FR15, DR0/2/4/6/8/10/12/14, FV0/4/8/12, XF0–XF15, XD0/2/4/6/8/10/12/14, or XMTRX. The correspondence between FPRn\_BANKi and the reference name is determined by the FR bit in FPSCR (see figure 2.4).

- Floating-point registers, FPRn\_BANKi (32 registers)

FPR0\_BANK0, FPR1\_BANK0, FPR2\_BANK0, FPR3\_BANK0, FPR4\_BANK0, FPR5\_BANK0,  
FPR6\_BANK0, FPR7\_BANK0, FPR8\_BANK0, FPR9\_BANK0, FPR10\_BANK0, FPR11\_BANK0,  
FPR12\_BANK0, FPR13\_BANK0, FPR14\_BANK0, FPR15\_BANK0

FPR0\_BANK1, FPR1\_BANK1, FPR2\_BANK1, FPR3\_BANK1, FPR4\_BANK1, FPR5\_BANK1,  
FPR6\_BANK1, FPR7\_BANK1, FPR8\_BANK1, FPR9\_BANK1, FPR10\_BANK1, FPR11\_BANK1,  
FPR12\_BANK1, FPR13\_BANK1, FPR14\_BANK1, FPR15\_BANK1

- Single-precision floating-point registers, FRi (16 registers)

When FPSCR.FR = 0, FR0–FR15 are assigned to FPR0\_BANK0–FPR15\_BANK0.

When FPSCR.FR = 1, FR0–FR15 are assigned to FPR0\_BANK1–FPR15\_BANK1.

- Double-precision floating-point registers or single-precision floating-point register pairs, DRi (8 registers): A DR register comprises two FR registers.

DR0 = {FR0, FR1}, DR2 = {FR2, FR3}, DR4 = {FR4, FR5}, DR6 = {FR6, FR7},

DR8 = {FR8, FR9}, DR10 = {FR10, FR11}, DR12 = {FR12, FR13}, DR14 = {FR14, FR15}

- Single-precision floating-point vector registers, FVi (4 registers): An FV register comprises four FR registers

FV0 = {FR0, FR1, FR2, FR3}, FV4 = {FR4, FR5, FR6, FR7},

FV8 = {FR8, FR9, FR10, FR11}, FV12 = {FR12, FR13, FR14, FR15}

- Single-precision floating-point extended registers, XFi (16 registers)

When FPSCR.FR = 0, XF0–XF15 are assigned to FPR0\_BANK1–FPR15\_BANK1.

When FPSCR.FR = 1, XF0–XF15 are assigned to FPR0\_BANK0–FPR15\_BANK0.

- Single-precision floating-point extended register pairs, XD<sub>i</sub> (8 registers): An XD register comprises two XF registers

XD0 = {XF0, XF1}, XD2 = {XF2, XF3}, XD4 = {XF4, XF5}, XD6 = {XF6, XF7},

XD8 = {XF8, XF9}, XD10 = {XF10, XF11}, XD12 = {XF12, XF13}, XD14 = {XF14, XF15}

- Single-precision floating-point extended register matrix, XMTRX: XMTRX comprises all 16 XF registers

<b>XMTRX =</b>	XF0	XF4	XF8	XF12
	XF1	XF5	XF9	XF13
	XF2	XF6	XF10	XF14
	XF3	XF7	XF11	XF15

**Figure 2.4** Floating-Point Registers

FPSCR.FR = 0				FPSCR.FR = 1			
FV0	DR0	FR0	FPR0_BANK0	XF0	XD0	XMTRX	
		FR1	FPR1_BANK0	XF1			
		DR2	FR2	FPR2_BANK0	XF2		XD2
	FV4	DR4	FR3	FPR3_BANK0	XF3		
			FR4	FPR4_BANK0	XF4	XD4	
FR5			FPR5_BANK0	XF5			
DR6		FR6	FPR6_BANK0	XF6	XD6		
		FR7	FPR7_BANK0	XF7			
	FV8	DR8	FR8	FPR8_BANK0	XF8	XD8	
FR9			FPR9_BANK0	XF9			
DR10			FR10	FPR10_BANK0	XF10	XD10	
FV12		DR12	FR11	FPR11_BANK0	XF11		
			FR12	FPR12_BANK0	XF12	XD12	
	FR13		FPR13_BANK0	XF13			
	DR14	FR14	FPR14_BANK0	XF14	XD14		
		FR15	FPR15_BANK0	XF15			
XMTRX	XD0	XF0	FPR0_BANK1	FR0	DR0	FV0	
		XF1	FPR1_BANK1	FR1			
		XD2	XF2	FPR2_BANK1	FR2	DR2	
	XD4	XF3	FPR3_BANK1	FR3			
		XF4	FPR4_BANK1	FR4	DR4	FV4	
		XF5	FPR5_BANK1	FR5			
	XD6	XF6	FPR6_BANK1	FR6	DR6		
		XF7	FPR7_BANK1	FR7			
		XD8	XF8	FPR8_BANK1	FR8	DR8	FV8
	XD10	XF9	FPR9_BANK1	FR9			
		XF10	FPR10_BANK1	FR10	DR10		
		XF11	FPR11_BANK1	FR11			
	XD12	XF12	FPR12_BANK1	FR12	DR12	FV12	
		XF13	FPR13_BANK1	FR13			
		XD14	XF14	FPR14_BANK1	FR14	DR14	
XF15	FPR15_BANK1	FR15					

**Programming Note:** After a reset, the values of FPR0\_BANK0–FPR15\_BANK0 and FPR0\_BANK1–FPR15\_BANK1 are undefined.

## 2.2.4 Control Registers

Status register, SR (32 bits, privilege protection, initial value = 0111 0000 0000 0000 0000 00XX 1111 00XX)

31	30	29	28	27	16	15	14	10	9	8	7	4	3	2	1	0
—	MD	RB	BL	—	FD	—	M	Q	IMASK	—	S	T				

**Note:** Reserved. These bits are always read as 0, and should only be written with 0.  
X:Undefined

- MD: Processor mode

MD = 0: User mode (some instructions cannot be executed, and some resources cannot be accessed)

MD = 1: Privileged mode

- RB: General register bank specifier in privileged mode (set to 1 by a reset, exception, or interrupt)

RB = 0: R0\_BANK0–R7\_BANK0 are accessed as general registers R0–R7. (R0\_BANK1–R7\_BANK1 can be accessed using LDC/STC R0\_BANK–R7\_BANK instructions.)

RB = 1: R0\_BANK1–R7\_BANK1 are accessed as general registers R0–R7. (R0\_BANK0–R7\_BANK0 can be accessed using LDC/STC R0\_BANK–R7\_BANK instructions.)

- BL: Exception/interrupt block bit (set to 1 by a reset, exception, or interrupt)

BL = 1: Interrupt requests are masked. If a general exception other than a user break occurs while BL = 1, the processor switches to the reset state.

- FD: FPU disable bit (cleared to 0 by a reset)

FD = 1: An FPU instruction causes a general FPU disable exception, and if the FPU instruction is in a delay slot, a slot FPU disable exception is generated. (FPU instructions: H'F\*\*\* instructions, LDC(.L)/STS(.L) instructions for FPUL/FPSCR)

- M, Q: Used by the DIV0S, DIV0U, and DIV1 instructions.

- IMASK: Interrupt mask level

External interrupts of a lower level than IMASK are masked.

- S: Specifies a saturation operation for a MAC instruction.

- T: True/false condition or carry/borrow bit

**Saved status register, SSR (32 bits, privilege protection, initial value undefined):** The current contents of SR are saved to SSR in the event of an exception or interrupt.

**Saved program counter, SPC (32 bits, privilege protection, initial value undefined):** The address of an instruction at which an interrupt or exception occurs is saved to SPC.

**Global base register, GBR (32 bits, initial value undefined):** GBR is referenced as the base address in a GBR-referencing MOV instruction.

**Vector base register, VBR (32 bits, privilege protection, initial value = H'0000 0000):** VBR is referenced as the branch destination base address in the event of an exception or interrupt. For details, see section 5, Exceptions.

**Saved general register 15, SGR (32 bits, privilege protection, initial value undefined):** The contents of R15 are saved to SGR in the event of an exception or interrupt.

**Debug base register, DBR (32 bits, privilege protection, initial value undefined):** When the user break debug function is enabled (BRCCR.UBDE = 1), DBR is referenced as the user break handler branch destination address instead of VBR.

## 2.2.5 System Registers

**Multiply-and-accumulate register high, MACH (32 bits, initial value undefined)**

**Multiply-and-accumulate register low, MACL (32 bits, initial value undefined)**

MACH/MACL is used for the added value in a MAC instruction, and to store a MAC instruction or MUL operation result.

**Procedure register, PR (32 bits, initial value undefined):** The return address is stored in PR in a subroutine call using a BSR, BSRF, or JSR instruction, and PR is referenced by the subroutine return instruction (RTS).

**Program counter, PC (32 bits, initial value = H'A000 0000):** PC indicates the instruction fetch address.

Floating-point status/control register, FPSCR (32 bits, initial value = H'0004 0001)

31	22	21	20	19	18	17	12	11	7	6	2	1	0
—				FR	SZ	PR	DN	Cause	Enable	Flag	RM		

---

**Note:** Reserved. These bits are always read as 0, and should only be written with 0.

---

- FR: Floating-point register bank

FR = 0: FPR0\_BANK0–FPR15\_BANK0 are assigned to FR0–FR15; FPR0\_BANK1–FPR15\_BANK1 are assigned to XF0–XF15.

FR = 1: FPR0\_BANK0–FPR15\_BANK0 are assigned to XF0–XF15; FPR0\_BANK1–FPR15\_BANK1 are assigned to FR0–FR15.

- SZ: Transfer size mode

SZ = 0: The data size of the FMOV instruction is 32 bits.

SZ = 1: The data size of the FMOV instruction is a 32-bit register pair (64 bits).

- PR: Precision mode

PR = 0: Floating-point instructions are executed as single-precision operations.

PR = 1: Floating-point instructions are executed as double-precision operations (the result of instructions for which double-precision is not supported is undefined).

Mode setting [SZ = 1, PR = 1] is reserved. FPU operation results are undefined in this mode.

- DN: Denormalization mode

DN = 0: A denormalized number is treated as such.

DN = 1: A denormalized number is treated as zero.

		FPU Error (E)	Invalid Operation (V)	Division by Zero (Z)	Overflow (O)	Underflow (U)	Inexact (I)
Cause	FPU exception cause field	Bit 17	Bit 16	Bit 15	Bit 14	Bit 13	Bit 12
Enable	FPU exception enable field	None	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7
Flag	FPU exception flag field	None	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2



When an FPU operation instruction is executed, the cause field is cleared to zero first. When the next FPU exception is requested, the corresponding bits in the cause field and flag field are set to 1. The flag field holds the status of the exception generated after the field was last cleared.

- RM: Rounding mode  
RM = 00: Round to Nearest  
RM = 01: Round to Zero  
RM = 10: Reserved  
RM = 11: Reserved
- Bits 22 to 31: Reserved

**Floating-point communication register, FPUL (32 bits, initial value undefined):** Data transfer between FPU registers and CPU registers is carried out via the FPUL register.

**Programming Note:** When SZ = 1 and big endian mode is selected, FMOV can be used for double-precision floating-point load or store operations. In little endian mode, two 32-bit data size moves must be executed, with SZ = 0, to load or store a double-precision floating-point number.

## 2.3 Memory-Mapped Registers

Appendix A shows the control registers mapped to memory. The control registers are double-mapped to the following two memory areas. All registers have two addresses.

H'1F00 0000–H'1FFF FFFF

H'FF00 0000–H'FFFF FFFF

These two areas are used as follows.

- H'1F00 0000–H'1FFF FFFF

This area must be accessed in address translation mode using the TLB. Since external memory is defined as a 29-bit address space in the SH7091 architecture, the TLB's physical page numbers do not cover a 32-bit address space. In address translation, the page numbers of this area can be set in the corresponding field of the TLB by accessing a memory-mapped register. The page numbers of this area should be used as the actual page numbers set in the TLB. When address translation is not performed, the operation of accesses to this area is undefined.

- H'FF00 0000–H'FFFF FFFF


This area must be accessed without address translation.

Do not access undefined locations in either area. The operation of an access to an undefined location is undefined. Also, memory-mapped registers must be accessed using a fixed data size. The operation of an access using an invalid data size is undefined.

**Programming Note:** Access to area H'FF00 0000–H'FFFF FFFF in user mode will cause an address error. Memory-mapped registers can be referenced in user mode by means of access that involves address translation.

## 2.4 Data Format in Registers

Register operands are always longwords (32 bits). When a memory operand is only a byte (8 bits) or a word (16 bits), it is sign-extended into a longword when loaded into a register.



## 2.5 Data Formats in Memory


Memory data formats are classified into bytes, words, and longwords. Memory can be accessed in 8-bit byte, 16-bit word, or 32-bit longword form. A memory operand less than 32 bits in length is sign-extended before being loaded into a register.

A word operand must be accessed starting from a word boundary (even address of a 2-byte unit: address  $2n$ ), and a longword operand starting from a longword boundary (even address of a 4-byte unit: address  $4n$ ). An address error will result if this rule is not observed. A byte operand can be accessed from any address.

Big endian or little endian byte order can be selected for the data format. The endian should be set with the MD5 external pin in a power-on reset. Big endian is selected when the MD5 pin is low, and little endian when high. The endian cannot be changed dynamically. Bit positions are numbered left to right from most-significant to least-significant. Thus, in a 32-bit longword, the leftmost bit, bit 31, is the most significant bit and the rightmost bit, bit 0, is the least significant bit.

The data format in memory is shown in figure 2.5. In little endian mode, data written as byte-size (8 bits) should be read as byte size, and data written as word-size (16 bits) should be read as word size.

**Figure 2.5** Data Formats In Memory

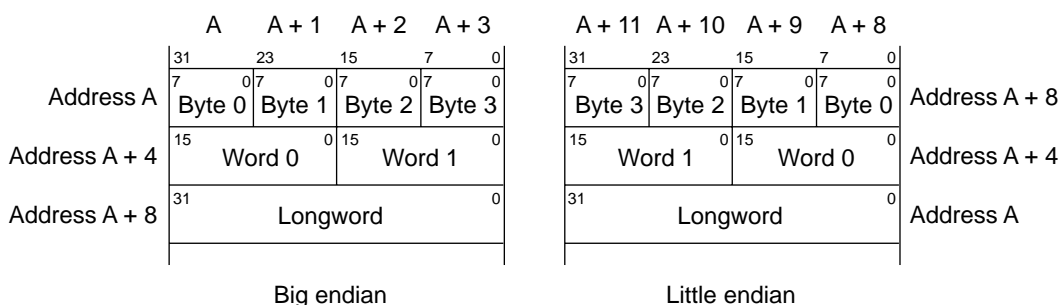

**Note:** The SH7091 does not support endian conversion for the 64-bit data format. Therefore, if double-precision floating-point format (64-bit) access is performed in little endian mode, the upper and lower 32 bits will be reversed.

## 2.6 Processor States

The SH7091 has five processor states: the reset state, exception-handling state, bus-released state, program execution state, and power-down state.

**Reset State:** In this state the CPU is reset. The reset state is entered when the RESET pin goes low. The CPU enters the power-on reset state if the MRESET pin is high, and the manual reset state if the MRESET pin is low. For more information on resets, see section 5, Exceptions.

In the power-on reset state, the internal state of the CPU and the on-chip peripheral module registers are initialized. In the manual reset state, the internal state of the CPU and registers of on-chip peripheral modules other than the bus state controller (BSC) are initialized. Since the bus state controller (BSC) is not initialized in the manual reset state, refreshing operations continue. Refer to the register configurations in the relevant sections for further details.

**Exception-Handling State:** This is a transient state during which the CPU's processor state flow is altered by a reset, general exception, or interrupt exception handling source.

In the case of a reset, the CPU branches to address H'A000 0000 and starts executing the user-coded exception handling program.

In the case of a general exception or interrupt, the program counter (PC) contents are saved in the saved program counter (SPC), the status register (SR) contents are saved in the saved status register (SSR), and the R15 contents are saved in saved general register 15 (SGR). The CPU branches to the start address of the user-coded exception service routine found from the sum of the contents of the vector base address and the vector offset. See section 5, Exceptions, for more information on resets, general exceptions, and interrupts.


**Program Execution State:** In this state the CPU executes program instructions in sequence.

**Power-Down State:** In the power-down state, CPU operation halts and power consumption is reduced. The power-down state is entered by executing a SLEEP instruction. There are two modes in the power-down state: sleep mode and standby mode. For details, see section 9, Power-Down Modes.

**Bus-Released State:** In this state the CPU has released the bus to a device that requested it.

Transitions between the states are shown in figure 2.6.

**Figure 2.6** Processor State Transitions

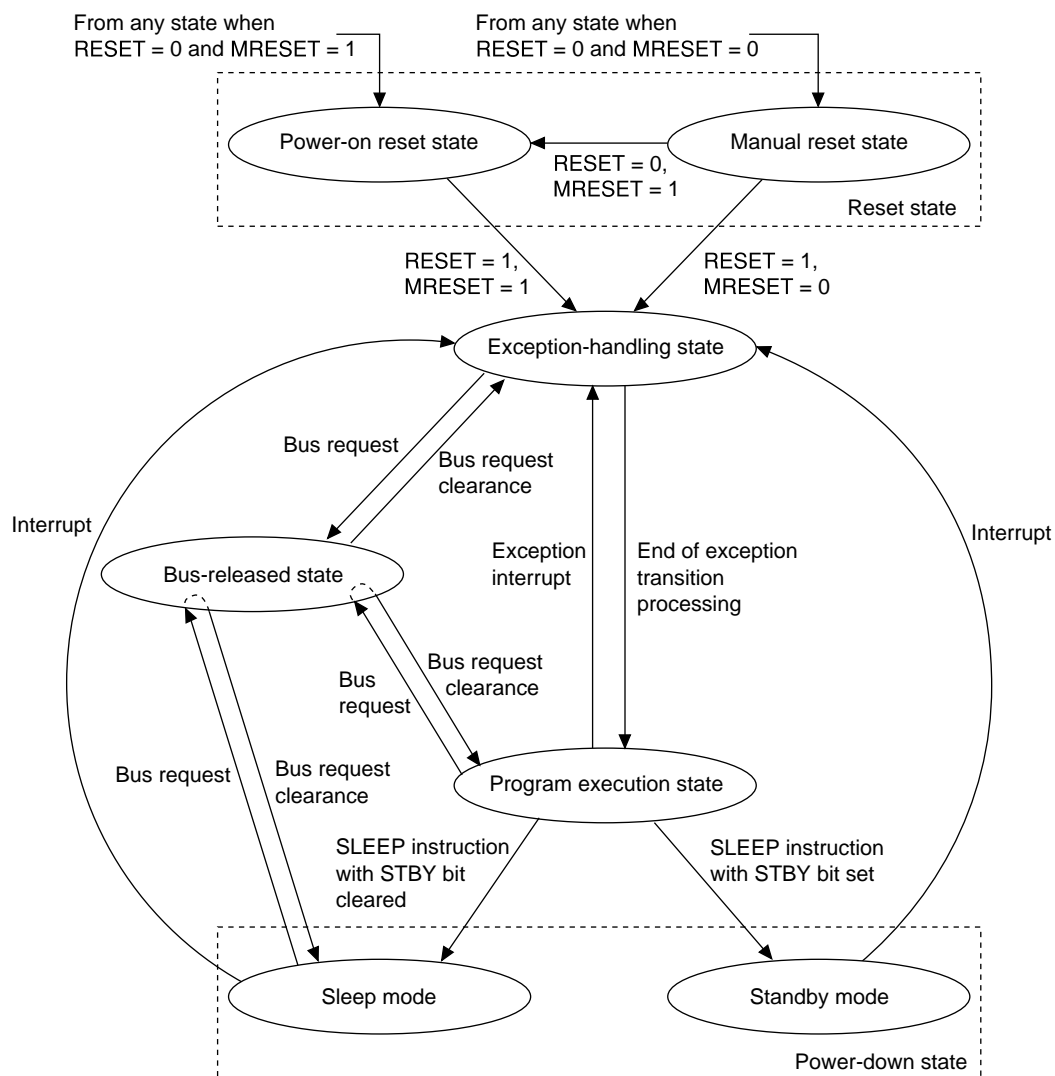

## **2.7 Processor Modes**

There are two processor modes: user mode and privileged mode. The processor mode is determined by the processor mode bit (MD) in the status register (SR). User mode is selected when the MD bit is cleared to 0, and privileged mode when the MD bit is set to 1. When the reset state or exception state is entered, the MD bit is set to 1. When exception handling ends, the MD bit is cleared to 0 and user mode is entered. There are certain registers and bits which can only be accessed in privileged mode.



## ***3. Memory Management Unit (MMU)***

---

### **3.1 Overview**

#### **3.1.1 Features**

The SH7091 can handle 29-bit external memory space from an 8-bit address space identifier and 32-bit logical (virtual) address space. Address translation from virtual address to physical address is performed using the memory management unit (MMU) built into the SH7091. The MMU performs high-speed address translation by caching user-created address translation table information in an address translation buffer (translation lookaside buffer: TLB). The SH7091 has four instruction TLB (ITLB) entries and 64 unified TLB (UTLB) entries. UTLB copies are stored in the ITLB by hardware. A paging system is used for address translation, with support for four page sizes (1, 4, and 64 kbytes, and 1 Mbyte). It is possible to set the virtual address space access right and implement storage protection independently for privileged mode and user mode.

#### **3.1.2 Role of the MMU**

The MMU was conceived as a means of making efficient use of physical memory. As shown in figure 3.1, when a process is smaller in size than the physical memory, the entire process can be mapped onto physical memory, but if the process increases in size to the point where it does not fit into physical memory, it becomes necessary to divide the process into smaller parts, and map the parts requiring execution onto physical memory on an ad hoc basis ((1)). Having this mapping onto physical memory executed consciously by the process itself imposes a heavy burden on the process. The virtual memory system was devised as a means of handling all physical memory mapping to reduce this burden ((2)). With a virtual memory system, the size of the available virtual memory is much larger than the actual physical memory, and processes are mapped onto this virtual memory. Thus processes only have to consider their operation in virtual memory, and mapping from virtual memory to physical memory is handled by the MMU. The MMU is normally managed by the OS, and physical memory switching is carried out so as to enable the virtual memory required by a task to be mapped smoothly onto physical memory. Physical memory switching is performed via secondary storage, etc.

The virtual memory system that came into being in this way works to best effect in a time sharing system (TSS) that allows a number of processes to run simultaneously ((3)). Running a number of processes in a TSS did not increase efficiency since each process had to take account of physical memory mapping. Efficiency is improved and the load on each process reduced by the use of a virtual memory system ((4)). In this system, virtual memory is allocated to

each process. The task of the MMU is to map a number of virtual memory areas onto physical memory in an efficient manner. It is also provided with memory protection functions to prevent a process from inadvertently accessing another process's physical memory.


When address translation from virtual memory to physical memory is performed using the MMU, it may happen that the translation information has not been recorded in the MMU, or the virtual memory of a different process is accessed by mistake. In such cases, the MMU will generate an exception, change the physical memory mapping, and record the new address translation information.

Although the functions of the MMU could be implemented by software alone, having address translation performed by software each time a process accessed physical memory would be very inefficient. For this reason, a buffer for address translation (the translation lookaside buffer: TLB) is provided in hardware, and frequently used address translation information is placed here. The TLB can be described as a cache for address translation information. However, unlike a cache, if address translation fails—that is, if an exception occurs—switching of the address translation information is normally performed by software. Thus memory management can be performed in a flexible manner by software.

There are two methods by which the MMU can perform mapping from virtual memory to physical memory: the paging method, using fixed-length address translation, and the segment method, using variable-length address translation. With the paging method, the unit of translation is a fixed-size address space called a page (usually from 1 to 64 kbytes in size).

In the following descriptions, the address space in virtual memory in the SH7091 is referred to as virtual address space, and the address space in physical memory as physical address space.

**Figure 3.1** Role of the MMU

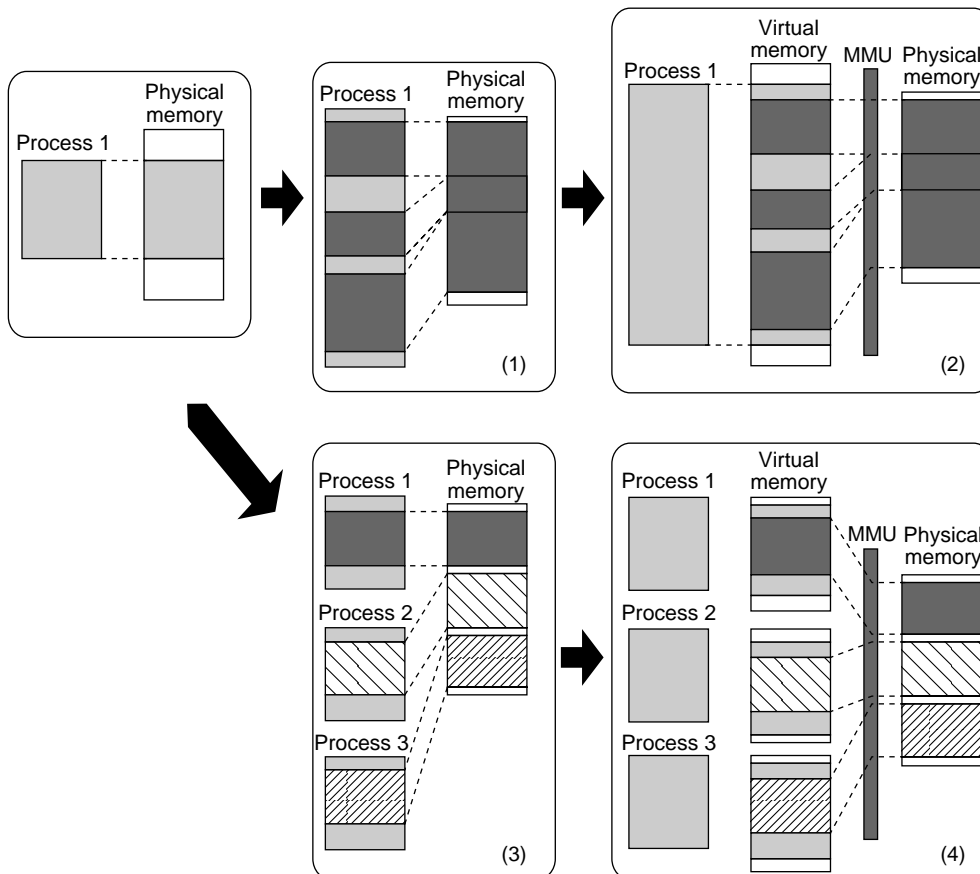

### 3.1.3 Register Configuration

The MMU registers are shown in table below 3.1.

**Table 3.1 MMU Registers**

Name	Abbreviation	R/W	Initial Value*1	P4 Address*2	Area 7 Address*2	Access Size
Page table entry high register	PTEH	R/W	Undefined	H'FF00 0000	H'1F00 0000	32
Page table entry low register	PTL	R/W	Undefined	H'FF00 0004	H'1F00 0004	32
Page table entry assistance register	PTEA	R/W	Undefined	H'FF00 0034	H'1F00 0034	32
Translation table base register	TTB	R/W	Undefined	H'FF00 0008	H'1F00 0008	32
TLB exception address register	TEA	R/W	Undefined	H'FF00 000C	H'1F00 000C	32
MMU control register	MMUCR	R/W	H'0000 0000	H'FF00 0010	H'1F00 0010	32

---

**Note:** The initial value is the value after a power-on reset or manual reset.  
This is the address when using the virtual/physical address space P4 area. When making an access from physical address space area 7 using the TLB, the upper 3 bits of the address are ignored.

---

### 3.1.4 Caution

Operation is not guaranteed if an area designated as a reserved area in this manual is accessed.

## 3.2 Register Descriptions

There are six MMU-related registers.

1. PTEH

31	10	9	8	7	0
VPN				—	ASID

2. PTEL

31	30	29	28	10	9	8	7	6	5	4	3	2	1	0
—	—	—	PPN			—	V	SZ	PR	SZ	C	D	SH	WT

3. PTEA

31	4	3	2	0
			TC	SA

4. TTB

31	0
TTB	

5. TEA

31
Virtual address at which MMU exception or address error occurred

6. MMUCR

31	26	25	24	23	18	17	16	15	10	9	8	7	6	5	4	3	2	1	0
LRUI		—	—	URB		—	—	URC		—	SV	—	—	—	—	—	TI	—	AT

SQMDSQMD

**Page table entry high register (PTEH):** Longword access to PTEH can be performed from H'FF00 0000 in the P4 area and H'1F00 0000 in area 7. PTEH consists of the virtual page number (VPN) and address space identifier (ASID). When an MMU exception or address error exception occurs, the VPN of the virtual address at which the exception occurred is set in the VPN field by hardware. VPN varies according to the page size, but the VPN set by hardware when an exception occurs consists of the upper 22 bits of the virtual address which caused the exception. VPN setting can also be carried out by software. The number of the currently executing process is set in the ASID field by software. ASID is not updated by hardware. VPN and ASID are recorded in the UTLB by means of the LDLTB instruction.

**Page table entry low register (PTEL):** Longword access to PTEL can be performed from H'FF00 0004 in the P4 area and H'1F00 0004 in area 7. PTEL is used to hold the physical page number and page management information to be recorded in the UTLB by means of the LDTLB instruction. The contents of this register are not changed unless a software directive is issued.

**Page table entry assistance register (PTEA):** Longword access to PTEA can be performed from H'FF00 0034 in the P4 area and H'1F00 0034 in area 7. PTEL is used to store assistance bits for PCMCIA access to the UTLB by means of the LDTLB instruction. The contents of this register are not changed unless a software directive is issued.

**Translation table base register (TTB):** Longword access to TTB can be performed from H'FF00 0008 in the P4 area and H'1F00 0008 in area 7. TTB is used, for example, to hold the base address of the currently used page table. The contents of TTB are not changed unless a software directive is issued. This register can be freely used by software.



**TLB exception address register (TEA):** Longword access to TEA can be performed from H'FF00 000C in the P4 area and H'1F00 000C in area 7. After an MMU exception or address error exception occurs, the virtual address at which the exception occurred is set in TEA by hardware. The contents of this register can be changed by software.

**MMU control register (MMUCR):** MMUCR contains the following bits:

LRUI:	Least recently used ITLB
URB:	UTLB replace boundary
URC:	UTLB replace counter
SQMD:	Store queue mode bit
SV:	Single virtual mode bit
TI:	TLB invalidate
AT:	Address translation bit

Longword access to MMUCR can be performed from H'FF00 0010 in the P4 area and H'1F00 0010 in area 7. The individual bits perform MMU settings as shown below. Therefore, MMUCR rewriting should be performed by a program in the P1 or P2 area. After MMUCR is updated, an instruction that performs data access to the P0, P3, U0, or store queue area should be located at least four instructions after the MMUCR update instruction. Also, a branch instruction to the P0, P3, or U0 area should be located at least eight instructions after the MMUCR update instruction. MMUCR contents can be changed by software. The LRUI bits and URC bits may also be updated by hardware.

- LRUI: The LRU (least recently used) method is used to decide the ITLB entry to be replaced in the event of an ITLB miss. The entry to be purged from the ITLB can be confirmed using the LRUI bits. LRUI is updated by means of the algorithm shown below. A dash in this table means that updating is not performed.

LRUI						
	[5]	[4]	[3]	[2]	[1]	[0]
When ITLB entry 0 is used	0	0	0	—	—	—
When ITLB entry 1 is used	1	—	—	0	0	—
When ITLB entry 2 is used	—	1	—	1	—	0
When ITLB entry 3 is used	—	—	1	—	1	1
Other than the above	—	—	—	—	—	—

When the LRUI bit settings are as shown below, the corresponding ITLB entry is updated by an ITLB miss. An asterisk in this table means “don’t care”.

LRUI						
	[5]	[4]	[3]	[2]	[1]	[0]
ITLB entry 0 is updated	1	1	1	*	*	*
ITLB entry 1 is updated	0	*	*	1	1	*
ITLB entry 2 is updated	*	0	*	0	*	1
ITLB entry 3 is updated	*	*	0	*	0	0
Other than the above	Setting prohibited					

Ensure that values for which “Setting prohibited” is indicated in the above table are not set at the discretion of software. After a power-on or manual reset the LRUI bits are initialized to 0, and therefore a prohibited setting is never made by a hardware update.

- URB: Bits that indicate the UTLB entry boundary at which replacement is to be performed. Valid only when URB > 0.
- URC: Random counter for indicating the UTLB entry for which replacement is to be performed with an LDTLB instruction. URC is incremented each time the UTLB is accessed. When URB > 0, URC is reset to 0 when the condition URC = URB occurs. Also note that, if a value is written to URC by software which results in the condition URC > URB, incrementing is first performed in excess of URB until URC = H'3F. URC is not incremented by an LDTLB instruction.
- SQMD: Store queue mode bit. Specifies the right of access to the store queues.

0: User / privileged access possible

1: Privileged access possible (address error exception in case of user access)

- SV: Bit that switches between single virtual memory mode and multiple virtual memory mode.

0: Multiple virtual memory mode

1: Single virtual memory mode

When this bit is changed, ensure that 1 is also written to the TI bit.

- TI: Writing 1 to this bit invalidates (clears to 0) all valid UTLB/ITLB bits. This bit always returns 0 when read.
- AT: Specifies MMU enabling or disabling.

0: MMU disabled

1: MMU enabled


MMU exceptions are not generated when the AT bit is 0. In the case of software that does not use the MMU, therefore, the AT bit should be cleared to 0.

## 3.3 Memory Space

### 3.3.1 Physical Memory Space

The SH7091 supports a 32-bit physical memory space, and can access a 4-Gbyte address space. When the MMUCR.AT bit is cleared to 0 and the MMU is disabled, the address space is this physical memory space. The physical memory space is divided into a number of areas, as shown in figure 3.3. The physical memory space is permanently mapped onto 29-bit external memory space; this correspondence can be implemented by ignoring the upper 3 bits of the physical memory space addresses. In privileged mode, the 4-Gbyte space from the P0 area to the P4 area can be accessed. In user mode, a 2-Gbyte space in the U0 area can be accessed. Accessing the P1 to P4 areas (except the store queue area) in user mode will cause an address error.

**Figure 3.3** Physical Memory Space (MMUCR.AT = 0)

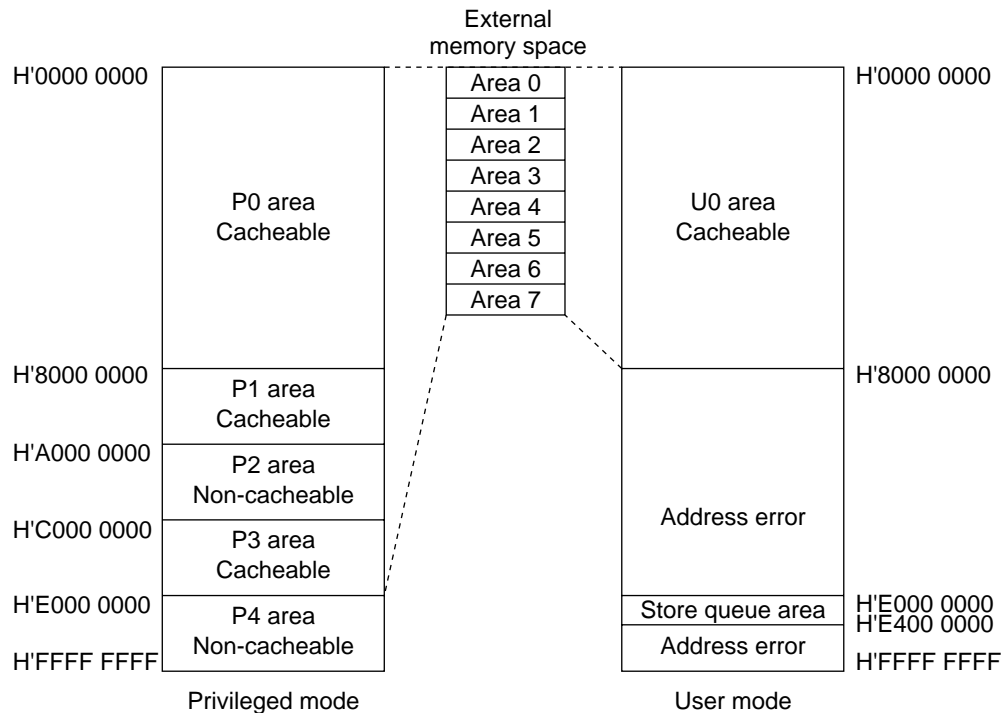

**P0, P1, P3, U0 Areas:** The P0, P1, P3, and U0 areas can be accessed using the cache. Whether or not the cache is used is determined by the cache control register (CCR). When the cache is used, with the exception of the P1 area, switching between the copy-back method and the write-through method for write accesses is specified by the CCR.WT bit. For the P1 area, switching is specified by the CCR.CB bit. Zeroizing the upper 3 bits of an address in these areas gives the corresponding external memory space address. However, since area 7 in the external memory space is a reserved area, a reserved area also appears in these areas.

**P2 Area:** The P2 area cannot be accessed using the cache. In the P2 area, zeroizing the upper 3 bits of an address gives the corresponding external memory space address. However, since area 7 in the external memory space is a reserved area, a reserved area also appears in this area.

**P4 Area:** The P4 area is mapped onto SH7091 on-chip I/O channels. This area cannot be accessed using the cache. The P4 area is shown in detail in figure 3.4.

**Figure 3.4** *P4 Area*

H'E000 0000	Store queue
H'E400 0000	
	Reserved area
H'F000 0000	
H'F100 0000	Instruction cache address array
H'F200 0000	Instruction cache data array
H'F300 0000	Instruction TLB address array
H'F400 0000	Instruction TLB data arrays 1 and 2
H'F500 0000	Operand cache address array
H'F600 0000	Operand cache data array
H'F700 0000	Unified TLB address array
H'F800 0000	Unified TLB data arrays 1 and 2
	Reserved area
H'FF00 0000	
	Control register area

The area from H'E000 0000 to H'E3FF FFFF comprises addresses for accessing the store queues (SQs). When the MMU is disabled (MMUCR.AT = 0), the SQ access right is specified by the MMUCR.SQMD bit. For details, see section 4.6, Store Queues.

The area from H'F000 0000 to H'F0FF FFFF is used for direct access to the instruction cache address array. For details, see section 4.5.1, IC Address Array.

The area from H'F100 0000 to H'F1FF FFFF is used for direct access to the instruction cache data array. For details, see section 4.5.2, IC Data Array.

The area from H'F200 0000 to H'F2FF FFFF is used for direct access to the instruction TLB address array. For details, see section 3.7.1, ITLB Address Array.

The area from H'F300 0000 to H'F3FF FFFF is used for direct access to instruction TLB data arrays 1 and 2. For details, see sections 3.7.2, ITLB Data Array 1, and 3.7.3, ITLB Data Array 2.

The area from H'F400 0000 to H'F4FF FFFF is used for direct access to the operand cache address array. For details, see section 4.5.3, OC Address Array.

The area from H'F500 0000 to H'F5FF FFFF is used for direct access to the operand cache data array. For details, see section 4.5.4, OC Data Array.

The area from H'F600 0000 to H'F6FF FFFF is used for direct access to the unified TLB address array. For details, see section 3.7.4, UTLB Address Array.

The area from H'F700 0000 to H'F7FF FFFF is used for direct access to unified TLB data arrays 1 and 2. For details, see sections 3.7.5, UTLB Data Array 1, and 3.7.6, UTLB Data Array 2.

The area from H'FF00 0000 to H'FFFF FFFF is the on-chip peripheral module control register area.

### 3.3.2 External Memory Space

The SH7091 supports a 29-bit external memory space. The external memory space is divided into eight areas as shown in figure 3.5. Areas 0 to 6 relate to memory, such as SRAM, synchronous DRAM, DRAM, and PCMCIA. Area 7 is a reserved area. For details, see section 13, Bus State Controller (BSC), in the Hardware Manual.


**Figure 3.5** *External Memory Space*

H'0000 0000	Area 0
H'0400 0000	Area 1
H'0800 0000	Area 2
H'0C00 0000	Area 3
H'1000 0000	Area 4
H'1400 0000	Area 5
H'1800 0000	Area 6
H'1C00 0000 H'1FFF FFFF	Area 7 (reserved area)

### 3.3.3 Virtual Memory Space

Setting the MMUCR.AT bit to 1 enables the P0, P3, and U0 areas of the physical memory space in the SH7091 to be mapped onto any external memory space in 1-, 4-, or 64-kbyte, or 1-Mbyte, page units. By using an 8-bit address space identifier, the P0, U0, P3, and store queue areas can be increased to a maximum of 256. This is called the virtual memory space. Mapping from virtual memory space to 29-bit external memory space is carried out using the TLB. Only when area 7 in external memory space is accessed using virtual memory space, addresses H'1F00 0000 to H'1FFF FFFF of area 7 are not designated as a reserved area, but are equivalent to the P4 area control register area in the physical memory space. Virtual memory space is illustrated in figure 3.6.

**Figure 3.6** Virtual Memory Space (MMUCR.AT = 1)

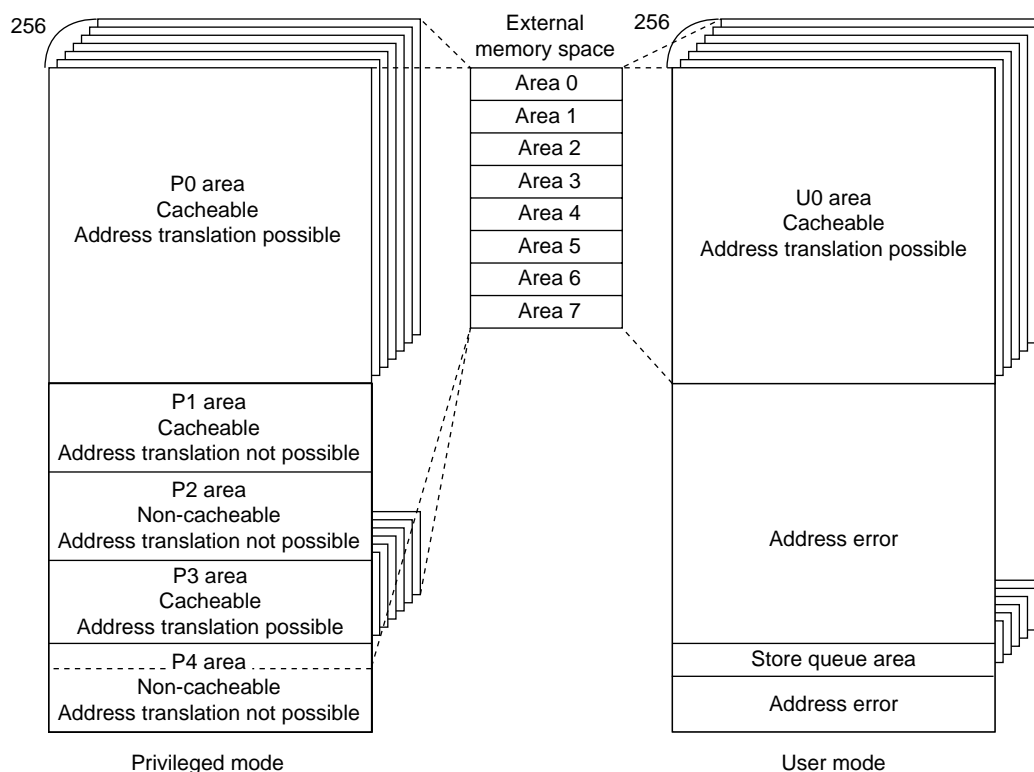

**P0, P3, U0 Areas:** The P0 area (excluding addresses H'7C00 0000 to H'7FFF FFFF), P3 area, and U0 area allow access using the cache and address translation using the TLB. These areas can be mapped onto any external memory space in 1-, 4-, or 64-kbyte, or 1-Mbyte, page units. When CCR is in the cache-enabled state and the TLB enable bit (C bit) is 1, accesses can be performed using the cache. In write accesses to the cache, switching between the copy-back method and the write-through method is indicated by the TLB write-through bit (WT bit), and is specified in page units.

Only when the P0, P3, and U0 areas are mapped onto external memory space by means of the TLB, addresses H'1F00 0000 to H'1FFF FFFF of area 7 in external memory space are allocated to the control register area. This enables on-chip peripheral module control registers to be accessed from the U0 area in user mode. In this case, the C bit for the corresponding page must be cleared to 0.

**P1, P2, P4 Areas:** Address translation using the TLB cannot be performed for the P1, P2, or P4 area (except for the store queue area). Accesses to these areas are the same as for physical memory space. The store queue area can be mapped onto any external memory space by the MMU. However, operation in the case of an exception differs from that for normal P0, U0, and P3 spaces. For details, see section 4.6, Store Queues.

## 3.3.4 On-Chip RAM Space

In the SH7091, half (8 kbytes) of the instruction cache (16 kbytes) can be used as on-chip RAM. This can be done by changing the CCR settings.

When the operand cache is used as on-chip RAM (CCR.ORA = 1), P0 area addresses H'7C00 0000 to H'7FFF FFFF are an on-chip RAM area. Data accesses (byte/word/longword/quadword) can be used in this area. This area can only be used in RAM mode.

### **3.3.5 Address Translation**

When the MMU is used, the virtual address space is divided into units called pages, and translation to physical addresses is carried out in these page units. The address translation table in external memory contains the physical addresses corresponding to virtual addresses and additional information such as memory protection codes. Fast address translation is achieved by caching the contents of the address translation table located in external memory into the TLB. In the SH7091, basically, the ITLB is used for instruction accesses and the UTLB for data accesses. In the event of an access to an area other than the P4 area, the accessed virtual address is translated to a physical address. If the virtual address belongs to the P1 or P2 area, the physical address is uniquely determined without accessing the TLB. If the virtual address belongs to the P0, U0, or P3 area, the TLB is searched using the virtual address, and if the virtual address is recorded in the TLB, a TLB hit is made and the corresponding physical address is read from the TLB. If the accessed virtual address is not recorded in the TLB, a TLB miss exception is generated and processing switches to the TLB miss exception routine. In the TLB miss exception routine, the address translation table in external memory is searched, and the corresponding physical address and page management information are recorded in the TLB. After the return from the exception handling routine, the instruction which caused the TLB miss exception is re-executed.

### **3.3.6 Single Virtual Memory Mode and Multiple Virtual Memory Mode**

There are two virtual memory systems, single virtual memory and multiple virtual memory, either of which can be selected with the MMUCR.SV bit. In the single virtual memory system, a number of processes run simultaneously, using virtual address space on an exclusive basis, and the physical address corresponding to a particular virtual address is uniquely determined. In the multiple virtual memory system, a number of processes run while sharing the virtual address space, and a particular virtual address may be translated into different physical addresses depending on the process. The only difference between the single virtual memory and multiple virtual memory systems in terms of operation is in the TLB address comparison method (see section 3.4.3, Address Translation Method).

### **3.3.7 Address Space Identifier (ASID)**

In multiple virtual memory mode, the 8-bit address space identifier (ASID) is used to distinguish between processes running simultaneously while sharing the virtual address space. Software can set the ASID of the currently executing process in PTEH in the MMU. The TLB does not have to be purged when processes are switched by means of ASID.

In single virtual memory mode, ASID is used to provide memory protection for processes running simultaneously while using the virtual memory space on an exclusive basis.

## 3.4 TLB Functions

### 3.4.1 Unified TLB (UTLB) Configuration

The unified TLB (UTLB) is so called because of its use for the following two purposes:

- 1) To translate a virtual address to a physical address in a data access
- 2) As a table of address translation information to be recorded in the instruction TLB in the event of an ITLB miss


Information in the address translation table located in external memory is cached into the UTLB. The address translation table contains virtual page numbers and address space identifiers, and corresponding physical page numbers and page management information. Figure 3.7 shows the overall configuration of the UTLB. The UTLB consists of 64 fully-associative type entries. Figure 3.8 shows the relationship between the address format and page size.

**Figure 3.7** UTLB Configuration


Entry 0	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR [1:0]	D	WT	SA [2:0]	TC
Entry 1	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR [1:0]	D	WT	SA [2:0]	TC
Entry 2	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR [1:0]	D	WT	SA [2:0]	TC
⋮				⋮								
Entry 63	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR [1:0]	D	WT	SA [2:0]	TC

**Figure 3.8** Relationship between Page Size and Address Format


- 1-kbyte page




- 4-kbyte page



- 64-kbyte page



- 1-Mbyte page





- VPN: Virtual page number

For 1-kbyte page: upper 22 bits of virtual address

For 4-kbyte page: upper 20 bits of virtual address

For 64-kbyte page: upper 16 bits of virtual address

For 1-Mbyte page: upper 12 bits of virtual address

- ASID: Address space identifier

Indicates the process that can access a virtual page.

In single virtual memory mode and user mode, or in multiple virtual memory mode, if the SH bit is 0, this identifier is compared with the ASID in PTEH when address comparison is performed.

- SH: Share status bit

When 0, pages are not shared by processes.

When 1, pages are shared by processes.

- SZ: Page size bits

Specify the page size.

00: 1-kbyte page

01: 4-kbyte page

10: 64-kbyte page

11: 1-Mbyte page

- V: Validity bit

Indicates whether the entry is valid.

0: Invalid

1: Valid

Cleared to 0 by a power-on reset.

Not affected by a manual reset.

- PPN: Physical page number

Upper 22 bits of the physical address.

With a 1-kbyte page, PPN bits [28:10] are valid.

With a 4-kbyte page, PPN bits [28:12] are valid.

With a 64-kbyte page, PPN bits [28:16] are valid.

With a 1-Mbyte page, PPN bits [28:20] are valid.

The synonym problem must be taken into account when setting the PPN (see section 3.5.5, Avoiding Synonym Problems).

- PR: Protection key data

2-bit data expressing the page access right as a code.

00: Can be read only, in privileged mode

01: Can be read and written in privileged mode

10: Can be read only, in privileged or user mode

11: Can be read and written in privileged mode or user mode

- C: Cacheability bit

Indicates whether a page is cacheable.

0: Not cacheable

1: Cacheable

When control register space is mapped, this bit must be cleared to 0.

- D: Dirty bit

Indicates whether a write has been performed to a page.

0: Write has not been performed

1: Write has been performed

- WT: Write-through bit

Specifies the cache write mode.

0: Copy-back mode

1: Write-through mode

- SA: Space attribute bits

Valid only when the page is mapped onto PCMCIA connected to area 5 or 6.

000: Undefined

001: Variable-size I/O space (base size according to IOIS16 signal)

010: 8-bit I/O space

011: 16-bit I/O space

100: 8-bit common memory space

101: 16-bit common memory space

110: 8-bit attribute memory space

111: 16-bit attribute memory space

- TC: Timing control bit

Used to select wait control register bits in the bus control unit for areas 5 and 6.

0: WCR2 (A5W2–A5W0) and PCR (A5PCW1–A5PCW0, A5TED2–A5TED0, A5TEH2–A5TEH0) are used

1: WCR2 (A6W2–A6W0) and PCR (A6PCW1–A6PCW0, A6TED2–A6TED0, A6TEH2–A6TEH0) are used

### 3.4.2 Instruction TLB (ITLB) Configuration

The ITLB is used to translate a virtual address to a physical address in an instruction access. Information in the address translation table located in the UTLB is cached into the ITLB. Figure 3.9 shows the overall configuration of the ITLB. The ITLB consists of 4 fully-associative type entries. The address translation information is almost the same as that in the UTLB, but with the following differences:

- 1) D and WT bits are not supported.
- 2) There is only one PR bit, corresponding to the upper of the PR bits in the UTLB.


**Figure 3.9** *ITLB Configuration*

Entry 0	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR	SA [2:0]	TC
Entry 1	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR	SA [2:0]	TC
Entry 2	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR	SA [2:0]	TC
Entry 3	ASID [7:0]	VPN [31:10]	V	PPN [28:10]	SZ [1:0]	SH	C	PR	SA [2:0]	TC


## 3.4.3 Address Translation Method

Figures 3.10 and 3.11 show flowcharts of memory accesses using the UTLB and ITLB.

**Figure 3.10** Flowchart of Memory Access Using UTLB

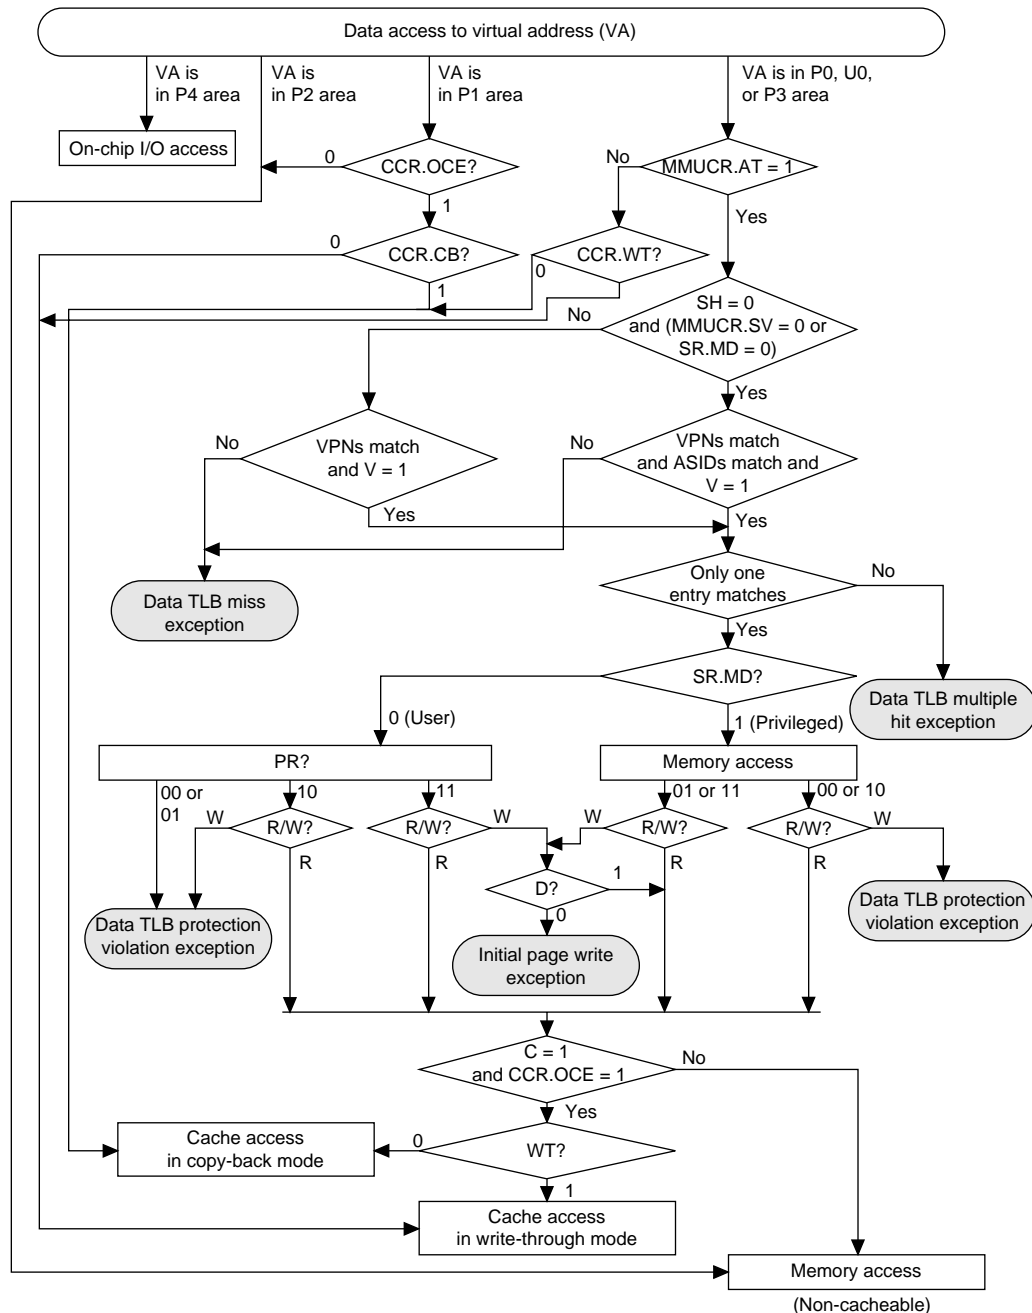

**Figure 3.11** Flowchart of Memory Access Using ITLB

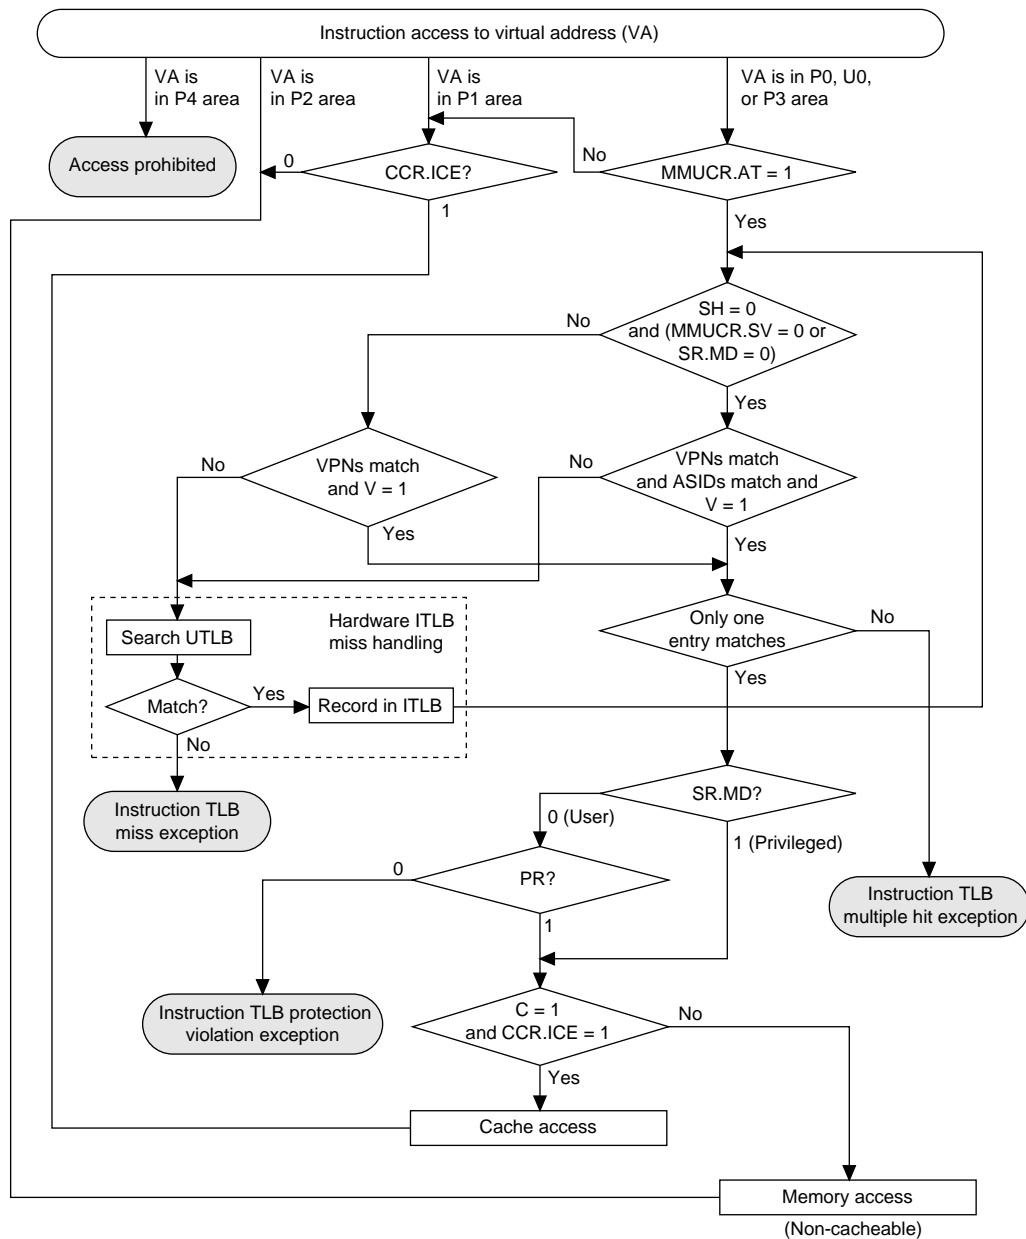

## **3.5 MMU Functions**

### **3.5.1 MMU Hardware Management**

The SH7091 supports the following MMU functions.

- 1) The MMU decodes the virtual address to be accessed by software, and performs address translation by controlling the UTLB/ITLB in accordance with the MMUCR settings.
- 2) The MMU determines the cache access status on the basis of the page management information read during address translation (C, WT, SA, and TC bits).
- 3) If address translation cannot be performed normally in a data access or instruction access, the MMU notifies software by means of an MMU exception.
- 4) If address translation information is not recorded in the ITLB in an instruction access, the MMU searches the UTLB, and if the necessary address translation information is recorded in the UTLB, the MMU copies this information into the ITLB in accordance with MMUCR.LRUI.

### **3.5.2 MMU Software Management**


Software processing for the MMU consists of the following:

- 1) Setting of MMU-related registers. Some registers are also partially updated by hardware automatically.
- 2) Recording, deletion, and reading of TLB entries. There are two methods of recording UTLB entries: by using the LDTLB instruction, or by writing directly to the memory-mapped UTLB. ITLB entries can only be recorded by writing directly to the memory-mapped ITLB. For deleting or reading UTLB/ITLB entries, it is possible to access the memory-mapped UTLB/ITLB.
- 3) MMU exception handling. When an MMU exception occurs, processing is performed based on information set by hardware.

### **3.5.3 MMU Instruction (LDTLB)**

A TLB load instruction (LDTLB) is provided for recording UTLB entries. When an LDTLB instruction is issued, the SH7091 copies the contents of PTEH, PTEL, and PTEA to the UTLB entry indicated by MMUCR.URC. ITLB entries are not updated by the LDTLB instruction, and therefore address translation information purged from the UTLB entry may still remain in the ITLB entry. As the LDTLB instruction changes address translation information, ensure that it is issued by a program in the P1 or P2 area. The operation of the LDTLB instruction is shown in figure 3.12.

**Figure 3.12** Operation of LDTLB Instruction

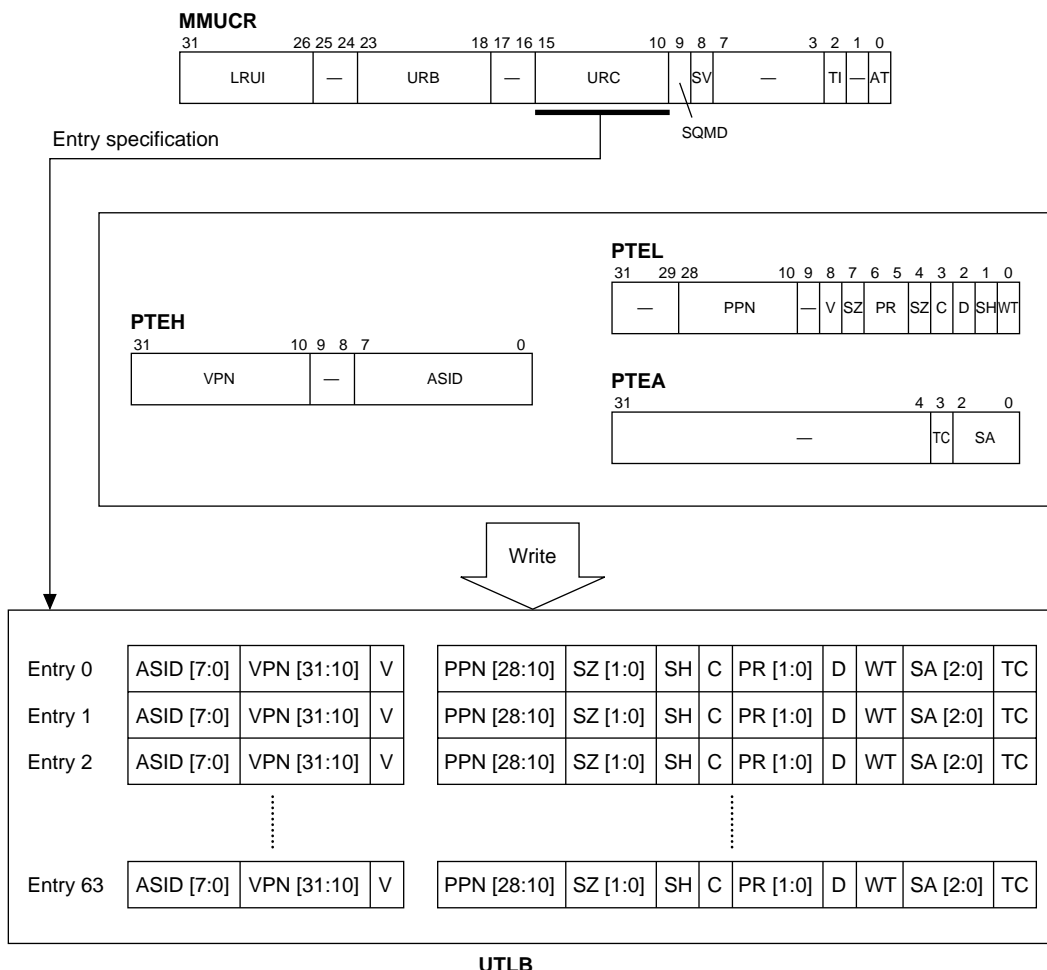

## 3.5.4 Hardware ITLB Miss Handling

In an instruction access, the SH7091 searches the ITLB. If it cannot find the necessary address translation information (i.e. in the event of an ITLB miss), the UTLB is searched by hardware, and if the necessary address translation information is present, it is recorded in the ITLB. This procedure is known as hardware ITLB miss handling. If the necessary address translation information is not found in the UTLB search, an instruction TLB miss exception is generated and processing passes to software.

## 3.5.5 Avoiding Synonym Problems

When 1- or 4-kbyte pages are recorded in TLB entries, a synonym problem may arise. The problem is that, when a number of virtual addresses are mapped onto a single physical address, the same physical address data is recorded in a number of cache entries, and it becomes impossible to guarantee data integrity. This problem does not occur with the instruction TLB or instruction cache. In the SH7091, entry specification is performed using bits [13:5] of the virtual address in order to achieve fast operand cache operation. However, bits [13:10] of the virtual address in the case of a 1-kbyte page, and bits [13:12] of the virtual address in the case of a 4-kbyte page, are subject to address translation. As a result, bits [13:10] of the physical address after translation may differ from bits [13:10] of the virtual address.

Consequently, the following restrictions apply to the recording of address translation information in UTLB entries.

- 1) When address translation information whereby a number of 1-kbyte page UTLB entries are translated into the same physical address is recorded in the UTLB, ensure that the VPN [13:10] values are the same.
- 2) When address translation information whereby a number of 4-kbyte page UTLB entries are translated into the same physical address is recorded in the UTLB, ensure that the VPN [13:12] values are the same.
- 3) Do not use 1-kbyte page UTLB entry physical addresses with UTLB entries of a different page size.
- 4) Do not use 4-kbyte page UTLB entry physical addresses with UTLB entries of a different page size.

The above restrictions apply only when performing accesses using the cache. When cache index mode is used, VPN [25] is used for the entry address instead of VPN [13], and therefore the above restrictions apply to VPN [25].

---

**Note:** When multiple items of address translation information use the same physical memory to provide for future SH Series expansion, ensure that the VPN [20:10] values are the same. Also, do not use the same physical address for address translation information of different page sizes.

---

## 3.6 MMU Exceptions

There are seven MMU exceptions: the instruction TLB multiple hit exception, instruction TLB miss exception, instruction TLB protection violation exception, data TLB multiple hit exception, data TLB miss exception, data TLB protection violation exception, and initial page write exception. Refer to figures 3.10 and 3.11 for the conditions under which each of these exceptions occurs.

### 3.6.1 Instruction TLB Multiple Hit Exception

An instruction TLB multiple hit exception occurs when more than one ITLB entry matches the virtual address to which an instruction access has been made. If multiple hits occur when the UTLB is searched by hardware in hardware ITLB miss handling, a data TLB multiple hit exception will result.

When an instruction TLB multiple hit exception occurs a reset is executed, and cache coherency is not guaranteed.

**Hardware Processing:** In the event of an instruction TLB multiple hit exception, hardware carries out the following processing:

- 1) Sets the virtual address at which the exception occurred in TEA.
- 2) Sets exception code H'140 in EXPEVT.
- 3) Branches to the reset handling routine (H'A000 0000).

**Software Processing (Reset Routine):** The ITLB entries which caused the multiple hit exception are checked in the reset handling routine. This exception is intended for use in program debugging, and should not normally be generated.

### 3.6.2 Instruction TLB Miss Exception

An instruction TLB miss exception occurs when address translation information for the virtual address to which an instruction access is made is not found in the UTLB entries by the hardware ITLB miss handling procedure. The instruction TLB miss exception processing carried out by hardware and software is shown below. This is the same as the processing for a data TLB miss exception.

**Hardware Processing:** In the event of an instruction TLB miss exception, hardware carries out the following processing:

- 1) Sets the VPN of the virtual address at which the exception occurred in PTEH.
- 2) Sets the virtual address at which the exception occurred in TEA.
- 3) Sets exception code H'040 in EXPEVT.
- 4) Sets the PC value indicating the address of the instruction at which the exception occurred in SPC. If the exception occurred at a delay slot, sets the PC value indicating the address of the delayed branch instruction in SPC.
- 5) Sets the SR contents at the time of the exception in SSR.
- 6) Sets the MD bit in SR to 1, and switches to privileged mode.
- 7) Sets the BL bit in SR to 1, and masks subsequent exception requests.
- 8) Sets the RB bit in SR to 1.
- 9) Branches to the address obtained by adding offset H'0000 0400 to the contents of VBR, and starts the instruction TLB miss exception handling routine.

**Software Processing (Instruction TLB Miss Exception Handling Routine):** Software is responsible for searching the external memory page table and assigning the necessary page table entry. Software should carry out the following processing in order to find and assign the necessary page table entry.

- 1) Write to PTEL the values of the PPN, PR, SZ, C, D, SH, V, and WT bits in the page table entry recorded in the external memory address translation table. If necessary, the values of the SA and TC bits should be written to PTEA.
- 2) When the entry to be replaced in entry replacement is specified by software, write that value to URC in the MMUCR register. If URC is greater than URB at this time, the value should be changed to an appropriate value after issuing an LDTLB instruction.
- 3) Execute the LDTLB instruction and write the contents of PTEH, PTEL, and PTEA to the TLB.
- 4) Finally, execute the exception handling return instruction (RTE), terminate the exception handling routine, and return control to the normal flow. The RTE instruction should be issued at least one instruction after the LDTLB instruction.



### 3.6.3 Instruction TLB Protection Violation Exception

An instruction TLB protection violation exception occurs when, even though an ITLB entry contains address translation information matching the virtual address to which an instruction access is made, the actual access type is not permitted by the access right specified by the PR bit. The instruction TLB protection violation exception processing carried out by hardware and software is shown below.

**Hardware Processing:** In the event of an instruction TLB protection violation exception, hardware carries out the following processing:

- 1) Sets the VPN of the virtual address at which the exception occurred in PTEH.
- 2) Sets the virtual address at which the exception occurred in TEA.
- 3) Sets exception code H'0A0 in EXPEVT.
- 4) Sets the PC value indicating the address of the instruction at which the exception occurred in SPC. If the exception occurred at a delay slot, sets the PC value indicating the address of the delayed branch instruction in SPC.
- 5) Sets the SR contents at the time of the exception in SSR.
- 6) Sets the MD bit in SR to 1, and switches to privileged mode.
- 7) Sets the BL bit in SR to 1, and masks subsequent exception requests.
- 8) Sets the RB bit in SR to 1.
- 9) Branches to the address obtained by adding offset H'0000 0100 to the contents of VBR, and starts the instruction TLB protection violation exception handling routine.

**Software Processing (Instruction TLB Protection Violation Exception Handling Routine):** Resolve the instruction TLB protection violation, execute the exception handling return instruction (RTE), terminate the exception handling routine, and return control to the normal flow. The RTE instruction should be issued at least one instruction after the LDTLB instruction.

### 3.6.4 Data TLB Multiple Hit Exception

A data TLB multiple hit exception occurs when more than one UTLB entry matches the virtual address to which a data access has been made. A data TLB multiple hit exception is also generated if multiple hits occur when the UTLB is searched in hardware ITLB miss handling.

When a data TLB multiple hit exception occurs a reset is executed, and cache coherency is not guaranteed. The contents of PPN in the UTLB prior to the exception may also be corrupted.

**Hardware Processing:** In the event of a data TLB multiple hit exception, hardware carries out the following processing:

- 1) Sets the virtual address at which the exception occurred in TEA.
- 2) Sets exception code H'140 in EXPEVT.
- 3) Branches to the reset handling routine (H'A000 0000).

**Software Processing (Reset Routine):** The UTLB entries which caused the multiple hit exception are checked in the reset handling routine. This exception is intended for use in program debugging, and should not normally be generated.

### **3.6.5 Data TLB Miss Exception**

A data TLB miss exception occurs when address translation information for the virtual address to which a data access is made is not found in the UTLB entries. The data TLB miss exception processing carried out by hardware and software is shown below.

**Hardware Processing:** In the event of a data TLB miss exception, hardware carries out the following processing:

- 1) Sets the VPN of the virtual address at which the exception occurred in PTEH.
- 2) Sets the virtual address at which the exception occurred in TEA.
- 3) Sets exception code H'040 in the case of a read, or H'060 in the case of a write, in EXPEVT (OCBP, OCBWB: read; OCBI, MOVCA.L: write).
- 4) Sets the PC value indicating the address of the instruction at which the exception occurred in SPC. If the exception occurred at a delay slot, sets the PC value indicating the address of the delayed branch instruction in SPC.
- 5) Sets the SR contents at the time of the exception in SSR.
- 6) Sets the MD bit in SR to 1, and switches to privileged mode.
- 7) Sets the BL bit in SR to 1, and masks subsequent exception requests.
- 8) Sets the RB bit in SR to 1.
- 9) Branches to the address obtained by adding offset H'0000 0400 to the contents of VBR, and starts the data TLB miss exception handling routine.

**Software Processing (Data TLB Miss Exception Handling Routine):** Software is responsible for searching the external memory page table and assigning the necessary page table entry. Software should carry out the following processing in order to find and assign the necessary page table entry.

- 1) Write to PTEL the values of the PPN, PR, SZ, C, D, SH, V, and WT bits in the page table entry recorded in the external memory address translation table. If necessary, the values of the SA and TC bits should be written to PTEA.
- 2) When the entry to be replaced in entry replacement is specified by software, write that value to URC in the MMUCR register. If URC is greater than URB at this time, the value should be changed to an appropriate value after issuing an LDTLB instruction.
- 3) Execute the LDTLB instruction and write the contents of PTEH, PTEL, and PTEA to the UTLB.
- 4) Finally, execute the exception handling return instruction (RTE), terminate the exception handling routine, and return control to the normal flow. The RTE instruction should be issued at least one instruction after the LDTLB instruction.

### **3.6.6 Data TLB Protection Violation Exception**

A data TLB protection violation exception occurs when, even though a UTLB entry contains address translation information matching the virtual address to which a data access is made, the actual access type is not permitted by the access right specified by the PR bit. The data TLB protection violation exception processing carried out by hardware and software is shown below.

**Hardware Processing:** In the event of a data TLB protection violation exception, hardware carries out the following processing:

- 1) Sets the VPN of the virtual address at which the exception occurred in PTEH.
- 2) Sets the virtual address at which the exception occurred in TEA.
- 3) Sets exception code H'0A0 in the case of a read, or H'0C0 in the case of a write, in EXPEVT (OCBP, OCBWB: read; OCBI, MOVCA.L: write).
- 4) Sets the PC value indicating the address of the instruction at which the exception occurred in SPC. If the exception occurred at a delay slot, sets the PC value indicating the address of the delayed branch instruction in SPC.
- 5) Sets the SR contents at the time of the exception in SSR.
- 6) Sets the MD bit in SR to 1, and switches to privileged mode.
- 7) Sets the BL bit in SR to 1, and masks subsequent exception requests.
- 8) Sets the RB bit in SR to 1.
- 9) Branches to the address obtained by adding offset H'0000 0100 to the contents of VBR, and starts the data TLB protection violation exception handling routine.

**Software Processing (Data TLB Protection Violation Exception Handling Routine):** Resolve the data TLB protection violation, execute the exception handling return instruction (RTE), terminate the exception handling routine, and return control to the normal flow. The RTE instruction should be issued at least one instruction after the LDTLB instruction.

### 3.6.7 Initial Page Write Exception

An initial page write exception occurs when the D bit is 0 even though a UTLB entry contains address translation information matching the virtual address to which a data access (write) is made, and the access is permitted. The initial page write exception processing carried out by hardware and software is shown below.

**Hardware Processing:** In the event of an initial page write exception, hardware carries out the following processing:

- 1) Sets the VPN of the virtual address at which the exception occurred in PTEH.
- 2) Sets the virtual address at which the exception occurred in TEA.
- 3) Sets exception code H'080 in EXPEVT.
- 4) Sets the PC value indicating the address of the instruction at which the exception occurred in SPC. If the exception occurred at a delay slot, sets the PC value indicating the address of the delayed branch instruction in SPC.
- 5) Sets the SR contents at the time of the exception in SSR.
- 6) Sets the MD bit in SR to 1, and switches to privileged mode.
- 7) Sets the BL bit in SR to 1, and masks subsequent exception requests.
- 8) Sets the RB bit in SR to 1.
- 9) Branches to the address obtained by adding offset H'0000 0100 to the contents of VBR, and starts the initial page write exception handling routine.

**SoftwareProcessing(InitialPageWriteExceptionHandlingRoutine):** The following processings should be carried out as the responsibility of software:

- 1) Retrieve the necessary page table entry from external memory.
- 2) Write 1 to the D bit in the external memory page table entry.
- 3) Write to PTEL the values of the PPN, PR, SZ, C, D, WT, SH, and V bits in the page table entry recorded in external memory. If necessary, the values of the SA and TC bits should be written to PTEA.
- 4) When the entry to be replaced in entry replacement is specified by software, write that value to URC in the MMUCR register. If URC is greater than URB at this time, the value should be changed to an appropriate value after issuing an LDTLB instruction.
- 5) Execute the LDTLB instruction and write the contents of PTEH, PTEL, and PTEA to the UTLB.
- 6) Finally, execute the exception handling return instruction (RTE), terminate the exception handling routine, and return control to the normal flow. The RTE instruction should be issued at least one instruction after the LDTLB instruction.

## **3.7 Memory-Mapped TLB Configuration**

To enable the ITLB and UTLB to be managed by software, their contents can be read and written by a P2 area program with a MOV instruction in privileged mode. Operation is not guaranteed if access is made from a program in another area. A branch to an area other than the P2 area should be made at least 8 instructions after this MOV instruction. The ITLB and UTLB are allocated to the P4 area in physical memory space. VPN, V, and ASID in the ITLB can be accessed as an address array, PPN, V, SZ, PR, C, and SH as data array 1, and SA and TC as data array 2. VPN, D, V, and ASID in the UTLB can be accessed as an address array, PPN, V, SZ, PR, C, D, WT, and SH as data array 1, and SA and TC as data array 2. V and D can be accessed from both the address array side and the data array side. Only longword access is possible. Instruction fetches cannot be performed in these areas. For reserved bits, a write value of 0 should be specified; their read value is undefined.

### **3.7.1 ITLB Address Array**

The ITLB address array is allocated to addresses H'F200 0000 to H'F2FF FFFF in the P4 area. An address array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and VPN, V, and ASID to be written to the address array are specified in the data field.


In the address field, bits [31:24] have the value H'F2 indicating the ITLB address array, and the entry is selected by bits [9:8]. As longword access is used, 0 should be specified for address field bits [1:0].

In the data field, VPN is indicated by bits [31:10], V by bit [8], and ASID by bits [7:0].

The following two kinds of operation can be used on the ITLB address array:

- 1) ITLB address array read VPN, V, and ASID are read into the data field from the ITLB entry corresponding to the entry set in the address field.
- 2) ITLB address array write VPN, V, and ASID specified in the data field are written to the ITLB entry corresponding to the entry set in the address field.

**Figure 3.13** Memory-Mapped ITLB Address Array

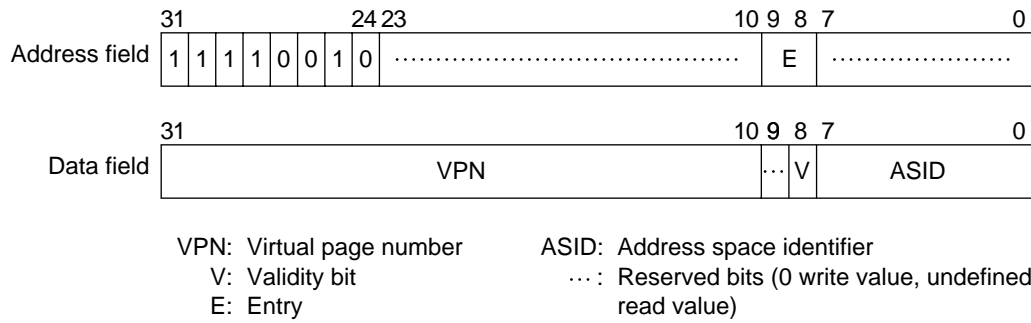

### 3.7.2 ITLB Data Array 1

ITLB data array 1 is allocated to addresses H'F300 0000 to H'F37F FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and PPN, V, SZ, PR, C, and SH to be written to the data array are specified in the data field.


In the address field, bits [31:23] have the value H'F30 indicating ITLB data array 1, and the entry is selected by bits [9:8].

In the data field, PPN is indicated by bits [28:10], V by bit [8], SZ by bits [7] and [4], PR by bit [6], C by bit [3], and SH by bit [1].

The following two kinds of operation can be used on ITLB data array 1:

- 1) ITLB data array 1 read PPN, V, SZ, PR, C, and SH are read into the data field from the ITLB entry corresponding to the entry set in the address field.
- 2) ITLB data array 1 write PPN, V, SZ, PR, C, and SH specified in the data field are written to the ITLB entry corresponding to the entry set in the address field.

**Figure 3.14** Memory-Mapped ITLB Data Array 1

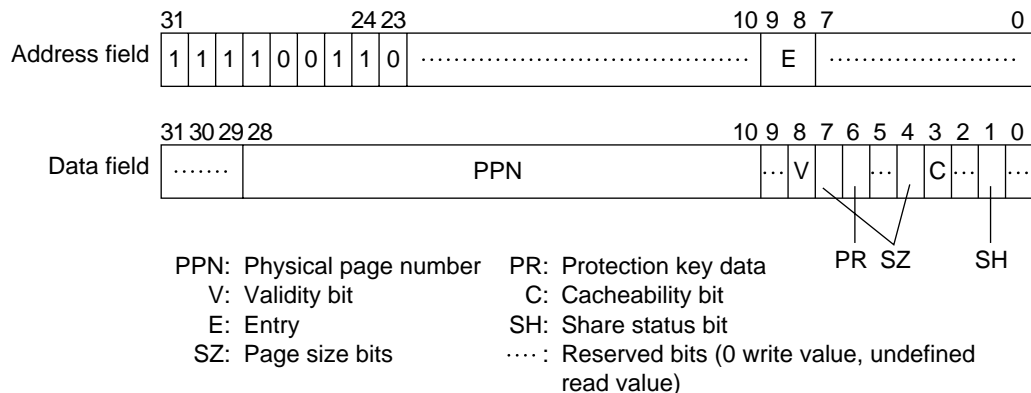

## 3.7.3 ITLB Data Array 2

ITLB data array 2 is allocated to addresses H'F380 0000 to H'F3FF FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and SA and TC to be written to data array 2 are specified in the data field.


In the address field, bits [31:23] have the value H'F38 indicating ITLB data array 2, and the entry is selected by bits [9:8].

In the data field, SA is indicated by bits [2:0], and TC by bit [3].

The following two kinds of operation can be used on ITLB data array 2:

- 1) ITLB data array 2 read SA and TC are read into the data field from the ITLB entry corresponding to the entry set in the address field.
- 2) ITLB data array 2 write SA and TC specified in the data field are written to the ITLB entry corresponding to the entry set in the address field.

**Figure 3.15** Memory-Mapped ITLB Data Array 2

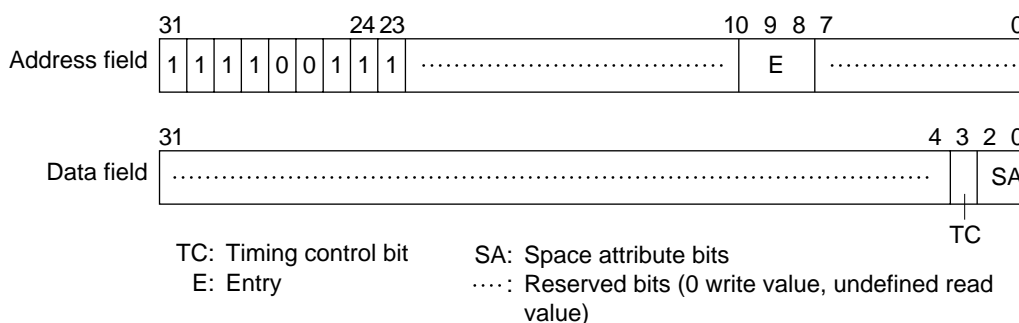

## 3.7.4 UTLB Address Array

The UTLB address array is allocated to addresses H'F600 0000 to H'F6FF FFFF in the P4 area. An address array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and VPN, D, V, and ASID to be written to the address array are specified in the data field.


In the address field, bits [31:24] have the value H'F6 indicating the UTLB address array, and the entry is selected by bits [13:8]. The address array bit [7] association bit (A bit) specifies whether or not address comparison is performed when writing to the UTLB address array.

In the data field, VPN is indicated by bits [31:10], D by bit [9], V by bit [8], and ASID by bits [7:0].

The following three kinds of operation can be used on the UTLB address array:

- 1) UTLB address array read VPN, D, V, and ASID are read into the data field from the UTLB entry corresponding to the entry set in the address field. In a read, associative operation is not performed regardless of whether the association bit specified in the address field is 1 or 0.
- 2) UTLB address array write (non-associative) VPN, D, V, and ASID specified in the data field are written to the UTLB entry corresponding to the entry set in the address field. The A bit in the address field should be cleared to 0.
- 3) UTLB address array write (associative)

When a write is performed with the A bit in the address field set to 1, comparison of all the UTLB entries is carried out using the VPN specified in the data field and PTEH.ASID. The usual address comparison rules are followed, but the occurrence of a TLB miss exception results in no operation. If the comparison identifies a UTLB entry corresponding to the VPN specified in the data field, D and V specified in the data field are written to that entry. If there is more than one matching entry, a data TLB multiple hit exception results. This associative operation is simultaneously carried out on the ITLB, and if a matching entry is found in the ITLB, V is written to that entry. Even if the UTLB comparison results in no operation, a write to the ITLB side only is performed as long as there is an ITLB match. If there is a match in both the UTLB and ITLB, the UTLB information is also written to the ITLB.

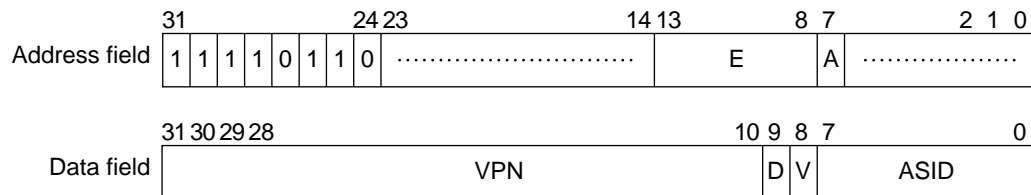**Figure 3.16** Memory-Mapped UTLB Address Array

VPN: Virtual page number

V: Validity bit

E: Entry

D: Dirty bit

ASID: Address space identifier

A: Association bit

.....: Reserved bits (0 write value, undefined read value)

### 3.7.5 UTLB Data Array 1

UTLB data array 1 is allocated to addresses H'F700 0000 to H'F77F FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and PPN, V, SZ, PR, C, D, SH, and WT to be written to the data array are specified in the data field.


In the address field, bits [31:23] have the value H'F70 indicating UTLB data array 1, and the entry is selected by bits [13:8].

In the data field, PPN is indicated by bits [28:10], V by bit [8], SZ by bits [7] and [4], PR by bits [6:5], C by bit [3], D by bit [2], SH by bit [1], and WT by bit [0].

The following two kinds of operation can be used on UTLB data array 1:

- 1) UTLB data array 1 read PPN, V, SZ, PR, C, D, SH, and WT are read into the data field from the UTLB entry corresponding to the entry set in the address field.
- 2) UTLB data array 1 write PPN, V, SZ, PR, C, D, SH, and WT specified in the data field are written to the UTLB entry corresponding to the entry set in the address field.

Figure 3.17 Memory-Mapped UTLB Data Array 1

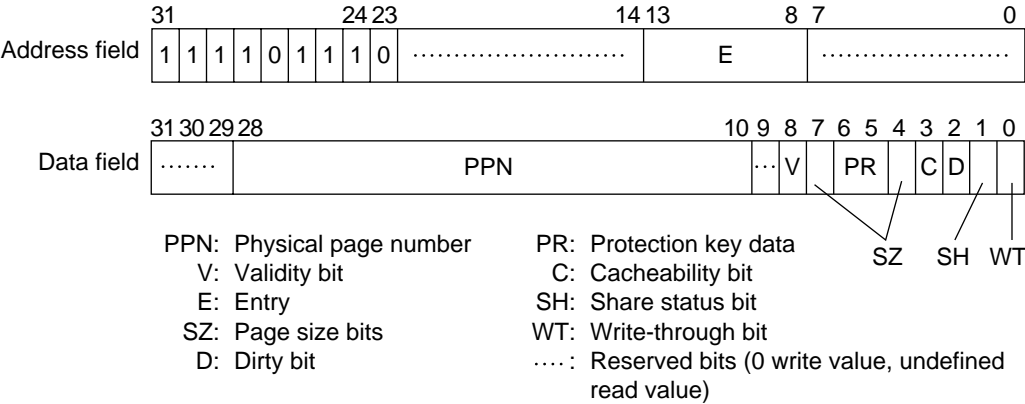

3.7.6 UTLB Data Array 2

UTLB data array 2 is allocated to addresses H'F780 0000 to H'F7FF FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification (when writing). Information for selecting the entry to be accessed is specified in the address field, and SA and TC to be written to data array 2 are specified in the data field.


In the address field, bits [31:23] have the value H'F78 indicating UTLB data array 2, and the entry is selected by bits [13:8].

In the data field, TC is indicated by bit [3], and SA by bits [2:0].

The following two kinds of operation can be used on UTLB data array 2:

- 1) UTLB data array 2 read SA and TC are read into the data field from the UTLB entry corresponding to the entry set in the address field.
- 2) UTLB data array 2 write SA and TC specified in the data field are written to the UTLB entry corresponding to the entry set in the address field.

Figure 3.18 Memory-Mapped UTLB Data Array 2

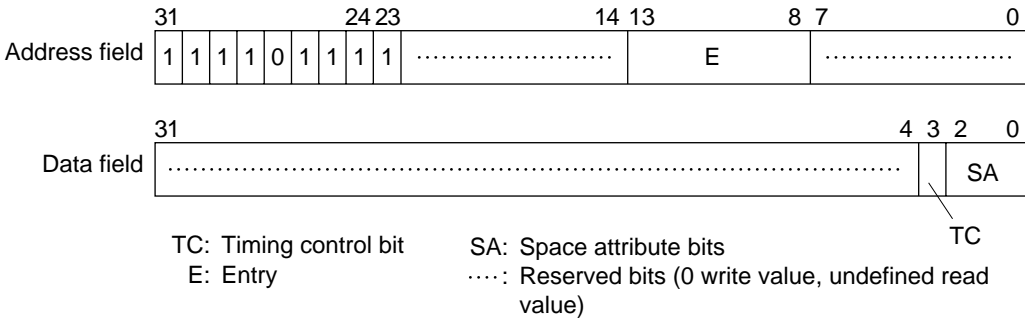





## 4. Caches

### 4.1 Overview

#### 4.1.1 Features

The SH7091 has an on-chip 8-kbyte instruction cache (IC) for instructions and 16-kbyte operand cache (OC) for data. Half of the memory of the operand cache (8 kbytes) can also be used as on-chip RAM. The features of these caches are summarized in table 4.1.

**Table 4.1** *Cache Features*

Item	Instruction Cache	Operand Cache
Capacity	8-kbyte cache	16-kbyte cache or 8-kbyte cache + 8-kbyte RAM
Type	Direct mapping	Direct mapping
Line size	32 bytes	32 bytes
Entries	256	512
Write method		Copy-back/write-through selectable
Item	Store Queues	
Capacity	2 x 32 bytes	
Addresses	H'E000 0000 to H'E3FF FFFF	
Write	Store instruction (1-cycle write)	
Write-back	Prefetch instruction	
Access right	MMU off: according to MMUCR.SQMD MMU on: according to individual page PR	

4.1.2 Register Configuration

Table 4.2 shows the cache control registers.

Table 4.2 Cache Control Registers


Name	Abbreviation	R/W	Initial Value*1	P4 Address*2	Area 7 Address*2	Access Size
Cache control register	CCR	R/W	H'0000 0000	H'FF00 001C	H'1F00 001C	32
Queue address control register 0	QACR0	R/Ws	Undefined	H'FF00 0038	H'1F00 0038	32
Queue address control register 1	QACR1	R/W	Undefined	H'FF00 003C	H'1F00 003C	32

**Note:** The initial value is the value after a power-on or manual reset.  
This is the address when using the virtual/physical address space P4 area. When making an access from physical address space area 7 using the TLB, the upper 3 bits of the address are ignored.

4.2 Register Descriptions

There are three cache and store queue related control registers, as shown in figure 4.1.

Figure 4.1 Cache and Store Queue Control Registers

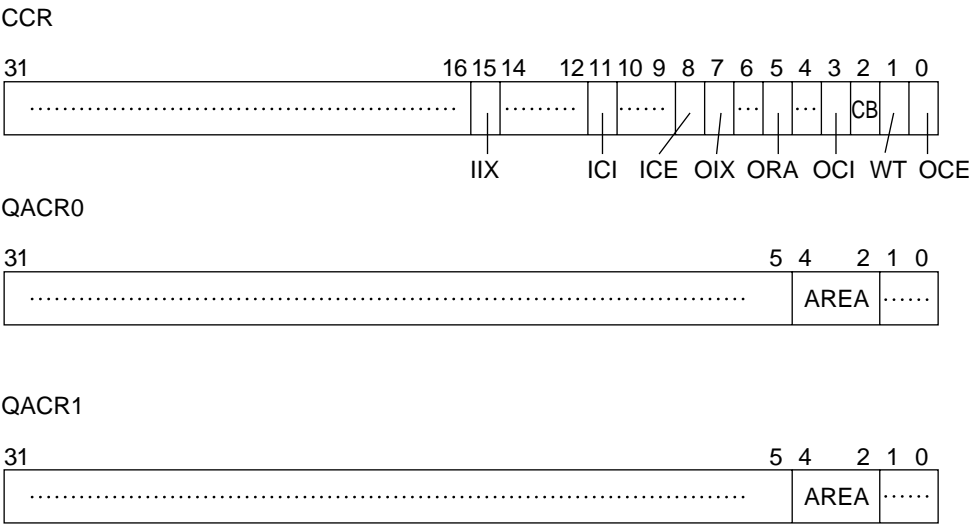

..... indicates reserved bits: 0 must be specified in a write; the read value is undefined.

**(1) Cache Control Register (CCR):** CCR contains the following bits:

IIX: IC index enable

ICI: IC invalidation

ICE: IC enable

OIX: OC index enable

ORA: OC RAM enable

OCI: OC invalidation

CB: Copy-back enable

WT: Write-through enable

OCE: OC enable

Longword access to CCR can be performed from H'FF00 001C in the P4 area and H'1F00 001C in area 7. The CCR bits are used for the cache settings described below. Consequently, CCR modifications must only be made by a program in the non-cached P2 area. After CCR is updated, an instruction that performs data access to the P0, P1, P3, or U0 area should be located at least four instructions after the CCR update instruction. Also, a branch instruction to the P0, P1, P3, or U0 area should be located at least eight instructions after the CCR update instruction.

- IIX: IC index enable bit

0: Address bits [12:5] used for IC entry selection

1: Address bits [25] and [11:5] used for IC entry selection

- ICI: IC invalidation bit

When 1 is written to this bit, the V bits of all IC entries are cleared to 0. This bit always returns 0 when read.

- ICE: IC enable bit

Indicates whether or not the IC is to be used. When address translation is performed, the IC cannot be used unless the C bit in the page management information is also 1.

0: IC not used

1: IC used

- OIX: OC index enable bit

0: Address bits [13:5] used for OC entry selection

1: Address bits [25] and [12:5] used for OC entry selection

- ORA: OC RAM enable bit

When the OC is enabled (OCE = 1), the ORA bit specifies whether the 8 kbytes from entry 128 to entry 255 and from entry 384 to entry 511 of the OC are to be used as RAM. When the OC is not enabled (OCE = 0), the ORA bit should be cleared to 0.

0: 16 kbytes used as cache

1: 8 kbytes used as cache, and 8 kbytes as RAM

- OCI: OC invalidation bit

When 1 is written to this bit, the V and U bits of all OC entries are cleared to 0. This bit always returns 0 when read.

- CB: Copy-back bit

Indicates the P1 area cache write mode.

0: Write-through mode

1: Copy-back mode

- WT: Write-through bit

Indicates the P0, U0, and P3 area cache write mode. When address translation is performed, the value of the WT bit in the page management information has priority.

0: Copy-back mode

1: Write-through mode

- OCE: OC enable bit

Indicates whether or not the OC is to be used. When address translation is performed, the OC cannot be used unless the C bit in the page management information is also 1.

0: OC not used

1: OC used

**Queue Address Control Register 0 (QACR0):** Longword access to QACR0 can be performed from H'FF00 0038 in the P4 area and H'1F00 0038 in area 7. QACR0 specifies the area onto which store queue 0 (SQ0) is mapped when the MMU is off.


**Queue Address Control Register 1 (QACR1):** Longword access to QACR1 can be performed from H'FF00 003C in the P4 area and H'1F00 003C in area 7. QACR1 specifies the area onto which store queue 1 (SQ1) is mapped when the MMU is off.

## **4.3 Operand Cache (OC)**

### **4.3.1 Configuration**

Figure 4.2 shows the configuration of the operand cache.

Figure 4.2 Configuration of Operand Cache

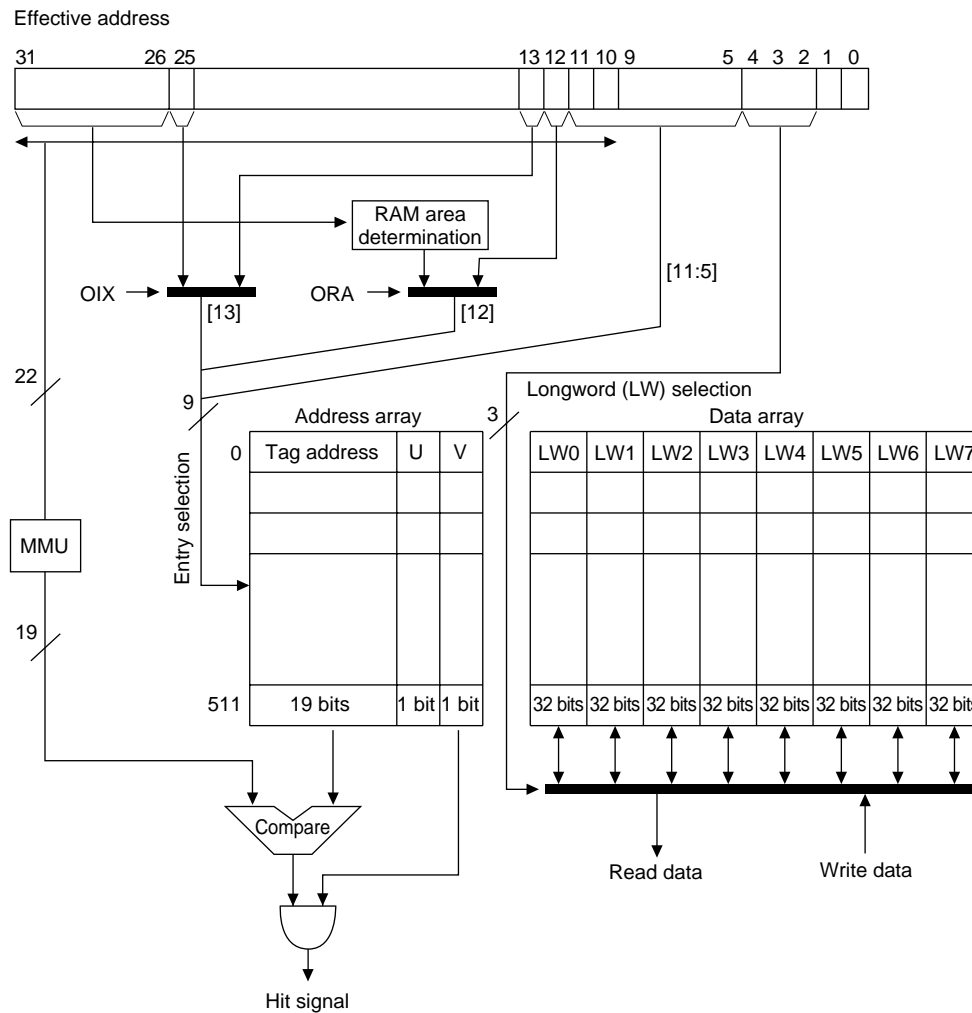

The operand cache consists of 512 cache lines, each composed of a 19-bit tag, V bit, U bit, and 32-byte data.

- Tag

Stores the upper 19 bits of the 29-bit external memory address of the data line to be cached. The tag is not initialized by a power-on or manual reset.

- V bit (validity bit)

Indicates that valid data is stored in the cache line. When this bit is 1, the cache line data is valid. The V bit is initialized to 0 by a power-on reset, but retains its value in a manual reset.

- U bit (dirty bit)

The U bit is set to 1 if data is written to the cache line while the cache is being used in copy-back mode. That is, the U bit indicates a mismatch between the data in the cache line and the data in external memory. The U bit is never set to 1 while the cache is being used in write-through mode, unless it is modified by accessing the memory-mapped cache (see section 4.5, Memory-Mapped Cache Configuration). The U bit is initialized to 0 by a power-on reset, but retains its value in a manual reset.

- Data field

The data field holds 32 bytes (256 bits) of data per cache line. The data array is not initialized by a power-on or manual reset.

## 4.3.2 Read Operation

When the OC is enabled (CCR.OCE = 1) and data is read by means of an effective address from a cacheable area, the cache operates as follows:

- 1) The tag, V bit, and U bit are read from the cache line indexed by effective address bits [13:5].
- 2) The tag is compared with bits [28:10] of the address resulting from effective address translation by the MMU:
  - If the tag matches and the V bit is 1 → (3a)
  - If the tag matches and the V bit is 0 → (3b)
  - If the tag does not match and the V bit is 0 → (3b)
  - If the tag does not match, the V bit is 1, and the U bit is 0 → (3b)
  - If the tag does not match, the V bit is 1, and the U bit is 1 → (3c)

### 3a. Cache hit

The data indexed by effective address bits [4:0] is read from the data field of the cache line indexed by effective address bits [13:5] in accordance with the access size (quadword/longword/word/byte).

### 3b. Cache miss (no write-back)

Data is read into the cache line from the external memory space corresponding to the effective address. Data reading is performed, using the wraparound method, in order from the longword data corresponding to the effective address, and when the corresponding data arrives in the cache, the read data is returned to the CPU. While the remaining one cache line of data is being read, the CPU can execute the next processing. When reading of one line of data is completed, the tag corresponding to the effective address is recorded in the cache, and 1 is written to the V bit.

### 3c. Cache miss (with write-back)

The tag and data field of the cache line indexed by effective address bits [13:5] are saved in the write-back buffer. Then data is read into the cache line from the external memory space corresponding to the effective address. Data reading is performed, using the wraparound method, in order from the longword data corresponding to the effective address, and when the corresponding data arrives in the cache, the read data is returned to the CPU. While the remaining one cache line of data is being read, the CPU can execute the next processing. When reading of one line of data is completed, the tag corresponding to the effective address is recorded in the cache, 1 is written to the V bit, and 0 to the U bit. The data in the write-back buffer is then written back to external memory.

## 4.3.3 Write Operation

When the OC is enabled (CCR.OCE = 1) and data is written by means of an effective address to a cacheable area, the cache operates as follows:

- 1) The tag, V bit, and U bit are read from the cache line indexed by effective address bits [13:5].
- 2) The tag is compared with bits [28:10] of the address resulting from effective address translation by the MMU:

	Copy-back	Write-through
• If the tag matches and the V bit is 1	→ (3a)	→ (3b)
• If the tag matches and the V bit is 0	→ (3c)	→ (3d)
• If the tag does not match and the V bit is 0	→ (3c)	→ (3d)
• If the tag does not match, the V bit is 1, and the U bit is 0	→ (3c)	→ (3d)
• If the tag does not match, the V bit is 1, and the U bit is 1	→ (3e)	→ (3d)

### 3a. Cache hit (copy-back)

A data write in accordance with the access size (quadword/longword/word/byte) is performed for the data indexed by bits [4:0] of the effective address of the data field of the cache line indexed by effective address bits [13:5]. Then 1 is set in the U bit.

#### 3b. Cache hit (write-through)

A data write in accordance with the access size (quadword/longword/word/byte) is performed for the data indexed by bits [4:0] of the effective address of the data field of the cache line indexed by effective address bits [13:5]. A write is also performed to the corresponding external memory using the specified access size.

#### 3c. Cache miss (no copy-back/write-back)

A data write in accordance with the access size (quadword/longword/word/byte) is performed for the data indexed by bits [4:0] of the effective address of the data field of the cache line indexed by effective address bits [13:5]. Then, data is read into the cache line from the external memory space corresponding to the effective address. Data reading is performed, using the wraparound method, in order from the longword data corresponding to the effective address, and one cache line of data is read excluding the written data. During this time, the CPU can execute the next processing. When reading of one line of data is completed, the tag corresponding to the effective address is recorded in the cache, and 1 is written to the V bit and U bit.

#### 3d. Cache miss (write-through)

A write of the specified access size is performed to the external memory corresponding to the effective address. In this case, a write to cache is not performed.

#### 3e. Cache miss (with copy-back/write-back)

The tag and data field of the cache line indexed by effective address bits [13:5] are first saved in the write-back buffer, and then a data write in accordance with the access size (quadword/longword/word/byte) is performed for the data indexed by bits [4:0] of the effective address of the data field of the cache line indexed by effective address bits [13:5]. Then, data is read into the cache line from the external memory space corresponding to the effective address. Data reading is performed, using the wraparound method, in order from the longword data corresponding to the effective address, and one cache line of data is read excluding the written data. During this time, the CPU can execute the next processing. When reading of one line of data is completed, the tag corresponding to the effective address is recorded in the cache, and 1 is written to the V bit and U bit. The data in the write-back buffer is then written back to external memory.

### 4.3.4 Write-Back Buffer

In order to give priority to data reads to the cache and improve performance, the SH7091 has a write-back buffer which holds the relevant cache entry when it becomes necessary to purge a dirty cache entry into external memory as the result of a cache miss. The write-back buffer contains one cache line of data and the physical address of the purge destination.

**Figure 4.3** Configuration of Write-Back Buffer

Physical address bits [28:5]	LW0	LW1	LW2	LW3	LW4	LW5	LW6	LW7
------------------------------	-----	-----	-----	-----	-----	-----	-----	-----

### 4.3.5 Write-Through Buffer

The SH7091 has a 64-bit buffer for holding write data when writing data in write-through mode or writing to a non-cacheable area. This allows the CPU to proceed to the next operation as soon as the write to the write-through buffer is completed, without waiting for completion of the write to external memory.

**Figure 4.4** Configuration of Write-Through Buffer

Physical address bits [28:0]	LW0	LW1
------------------------------	-----	-----

### 4.3.6 RAM Mode

Setting CCR.ORA to 1 enables 8 kbytes of the operand cache to be used as RAM. The operand cache entries used as RAM are entries 128 to 255 and 384 to 511. Other entries can still be used as cache. RAM can be accessed using addresses H'7C00 0000 to H'7FFF FFFF. Byte-, word-, longword-, and quadword-size data reads and writes can be performed in the operand cache RAM area. Instruction fetches cannot be performed in this area.

An example of RAM use is shown below. Here, the 4 kbytes comprising OC entries 128 to 256 are designated as RAM area 1, and the 4 kbytes comprising OC entries 384 to 511 as RAM area 2.

- When OC index mode is off (CCR.OIX = 0)

H'7C00 0000 to H'7C00 0FFF (4 kB): Corresponds to RAM area 1

H'7C00 1000 to H'7C00 1FFF (4 kB): Corresponds to RAM area 1

H'7C00 2000 to H'7C00 2FFF (4 kB): Corresponds to RAM area 2

H'7C00 3000 to H'7C00 3FFF (4 kB): Corresponds to RAM area 2

H'7C00 4000 to H'7C00 4FFF (4 kB): Corresponds to RAM area 1

: : :

RAM areas 1 and 2 then repeat every 8 kbytes up to H'7FFF FFFF.

Thus, to secure a continuous 8-kbyte RAM area, the area from H'7C00 1000 to H'7C00 2FFF can be used, for example.

- When OC index mode is on (CCR.OIX = 1)

H'7C00 0000 to H'7C00 0FFF (4 kB): Corresponds to RAM area 1

H'7C00 1000 to H'7C00 1FFF (4 kB): Corresponds to RAM area 1

H'7C00 2000 to H'7C00 2FFF (4 kB): Corresponds to RAM area 1

: : :

H'7DFF F000 to H'7DFF FFFF (4 kB): Corresponds to RAM area 1

H'7E00 0000 to H'7E00 0FFF (4 kB): Corresponds to RAM area 2

H'7E00 1000 to H'7E00 1FFF (4 kB): Corresponds to RAM area 2

: : :

H'7FFF F000 to H'7FFF FFFF (4 kB): Corresponds to RAM area 2

As the distinction between RAM areas 1 and 2 is indicated by address bit [25], the area from H'7DFF F000 to H'7E00 0FFF should be used to secure a continuous 8-kbyte RAM area.

### 4.3.7 OC Index Mode

Setting CCR.OIX to 1 enables OC indexing to be performed using bit [25] of the effective address. This is called OC index mode. In normal mode, with CCR.OIX cleared to 0, OC indexing is performed using bits [13:5] of the effective address; therefore, when 16 kbytes or more of consecutive data is handled, the OC is fully used by this data. This results in frequent cache misses. Using index mode allows the OC to be handled as two 8-kbyte areas by means of effective address bit [25], providing efficient use of the cache.



### 4.3.8 Coherency between Cache and External Memory

Coherency between cache and external memory should be assured by software. In the SH7091, the following four new instructions are supported for cache operations. For details of these instructions, see section 10, Instruction Descriptions.

Invalidate instruction:	OCBI @Rn	Cache invalidation (no write-back)
Purge instruction:	OCBP @Rn	Cache invalidation (with write-back)
Write-back instruction:	OCBWB @Rn	Cache write-back
Allocate instruction:	MOVCA.L R0,@Rn	Cache allocation

### 4.3.9 Prefetch Operation

The SH7091 supports a prefetch instruction to reduce the cache fill penalty incurred as the result of a cache miss. If it is known that a cache miss will result from a read or write operation, it is possible to fill the cache with data beforehand by means of the prefetch instruction to prevent a cache miss due to the read or write operation, and so improve software performance. If a prefetch instruction is executed for data already held in the cache, or if an MMU exception occurs at the intended prefetch address, the result is no operation, and an exception is not generated. For details of the prefetch instruction, see section 10.73, PREF.


Prefetch instruction:           PREF @Rn

## 4.4 Instruction Cache (IC)

### 4.4.1 Configuration

Figure 4.5 shows the configuration of the instruction cache.

**Figure 4.5** Configuration of Instruction Cache

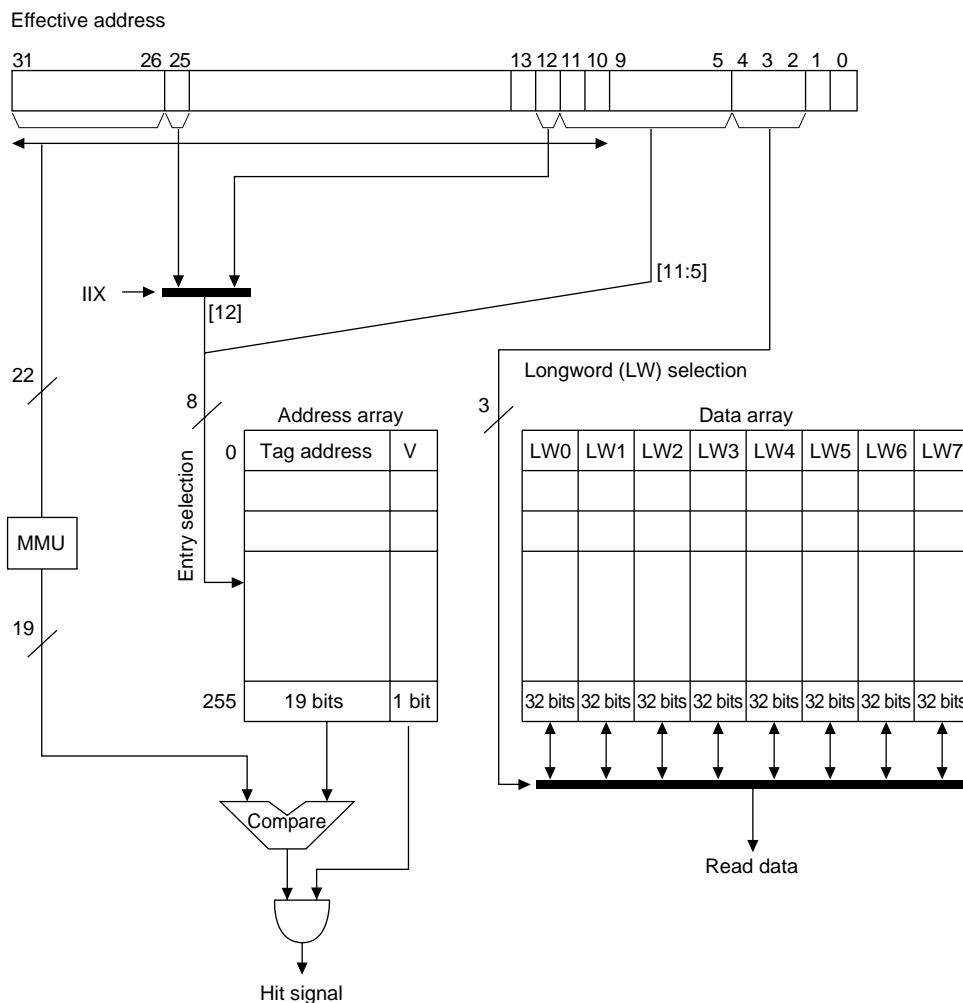

The instruction cache consists of 256 cache lines, each composed of a 19-bit tag, V bit, and 32-byte data (16 instructions).

- Tag

Stores the upper 19 bits of the 29-bit external memory address of the data line to be cached. The tag is not initialized by a power-on or manual reset.

- V bit (validity bit)

Indicates that valid data is stored in the cache line. When this bit is 1, the cache line data is valid. The V bit is initialized to 0 by a power-on reset, but retains its value in a manual reset.

- Data array

The data field holds 32 bytes (256 bits) of data per cache line. The data array is not initialized by a power-on or manual reset.

### 4.4.2 Read Operation

When the IC is enabled (CCR.ICE = 1) and instruction fetches are performed by means of an effective address from a cacheable area, the instruction cache operates as follows:

- 1) The tag and V bit are read from the cache line indexed by effective address bits [12:5].
- 2) The tag is compared with bits [28:10] of the address resulting from effective address translation by the MMU:
  - If the tag matches and the V bit is 1 → (3a)
  - If the tag matches and the V bit is 0 → (3b)
  - If the tag does not match and the V bit is 0 → (3b)
  - If the tag does not match and the V bit is 1 → (3b)

#### 3a. Cache hit

The data indexed by effective address bits [4:2] is read as an instruction from the data field of the cache line indexed by effective address bits [12:5].

#### 3b. Cache miss

Data is read into the cache line from the external memory space corresponding to the effective address. Data reading is performed, using the wraparound method, in order from the longword data corresponding to the effective address, and when the corresponding data arrives in the cache, the read data is returned to the CPU as an instruction. When reading of one line of data is completed, the tag corresponding to the effective address is recorded in the cache, and 1 is written to the V bit.

### 4.4.3 IC Index Mode

Setting CCR.IIX to 1 enables IC indexing to be performed using bit [25] of the effective address. This is called IC index mode. In normal mode, with CCR.IIX cleared to 0, IC indexing is performed using bits [12:5] of the effective address; therefore, when 8 kbytes or more of consecutive program instructions are handled, the IC is fully used by this program. This results in frequent cache misses. Using index mode allows the IC to be handled as two 4-kbyte areas by means of effective address bit [25], providing efficient use of the cache.

## 4.5 Memory-Mapped Cache Configuration

To enable the IC and OC to be managed by software, their contents can be read and written by a P2 area program with a MOV instruction in privileged mode. Operation is not guaranteed if access is made from a program in another area. In this case, a branch to the P0, U0, P1, or P3 area should be made at least 8 instructions after this MOV instruction. The IC and OC are allocated to the P4 area in physical memory space. Only data accesses can be used on both the IC address array and data array and the OC address array and data array, and accesses are always longword-size. Instruction fetches cannot be performed in these areas. For reserved bits, a write value of 0 should be specified; their read value is undefined.

## 4.5.1 IC Address Array

The IC address array is allocated to addresses H'F000 0000 to H'F0FF FFFF in the P4 area. An address array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification. The entry to be accessed is specified in the address field, and the write tag and V bit are specified in the data field.

In the address field, bits [31:24] have the value H'F0 indicating the IC address array, and the entry is specified by bits [12:5]. CCR.IIX has no effect on this entry specification. The address array bit [3] association bit (A bit) specifies whether or not association is performed when writing to the IC address array. As only longword access is used, 0 should be specified for address field bits [1:0].

In the data field, the tag is indicated by bits [31:10], and the V bit by bit [0]. As the IC address array tag is 19 bits in length, data field bits [31:29] are not used in the case of a write in which association is not performed. Data field bits [31:29] are used for the virtual address specification only in the case of a write in which association is performed.

The following three kinds of operation can be used on the IC address array:

### 1) IC address array read

The tag and V bit are read into the data field from the IC entry corresponding to the entry set in the address field. In a read, associative operation is not performed regardless of whether the association bit specified in the address field is 1 or 0.


### 2) IC address array write (non-associative)

The tag and V bit specified in the data field are written to the IC entry corresponding to the entry set in the address field. The A bit in the address field should be cleared to 0.

### 3) IC address array write (associative)

When a write is performed with the A bit in the address field set to 1, the tag stored in the entry specified in the address field is compared with the tag specified in the data field. If the MMU is enabled at this time, comparison is performed after the virtual address specified by data field bits [31:10] has been translated to a physical address using the ITLB. If the addresses match and the V bit is 1, the V bit specified in the data field is written into the IC entry. This operation is used to invalidate a specific IC entry. If an instruction TLB miss exception or protection violation exception occurs during address translation, or the comparison shows a mismatch, no operation results and the write is not performed. If an instruction TLB multiple hit exception occurs during address translation, processing switches to the instruction TLB multiple hit exception handling routine.

**Figure 4.6** Memory-Mapped IC Address Array

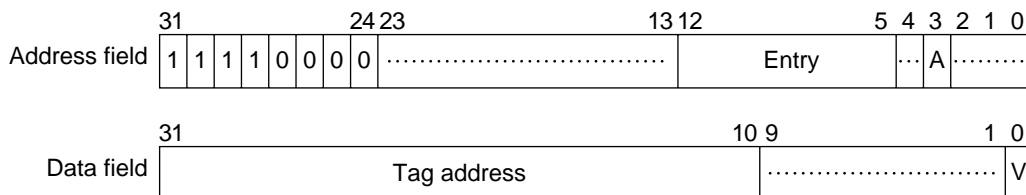

V : Validity bit

A : Association bit

....: Reserved bits (0 write value, undefined read value)

### 4.5.2 IC Data Array

The IC data array is allocated to addresses H'F100 0000 to H'F1FF FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification. The entry to be accessed is specified in the address field, and the longword data to be written is specified in the data field.

In the address field, bits [31:24] have the value H'F1 indicating the IC data array, and the entry is specified by bits [12:5]. CCR.IIX has no effect on this entry specification. Address field bits [4:2] are used for the longword data specification in the entry. As only longword access is used, 0 should be specified for address field bits [1:0].

The data field is used for the longword data specification.

The following two kinds of operation can be used on the IC data array:


1) IC data array read

Longword data is read into the data field from the data specified by the longword specification bits in the address field in the IC entry corresponding to the entry set in the address field.

2) IC data array write

The longword data specified in the data field is written for the data specified by the longword specification bits in the address field in the IC entry corresponding to the entry set in the address field.

**Figure 4.7** Memory-Mapped IC Data Array

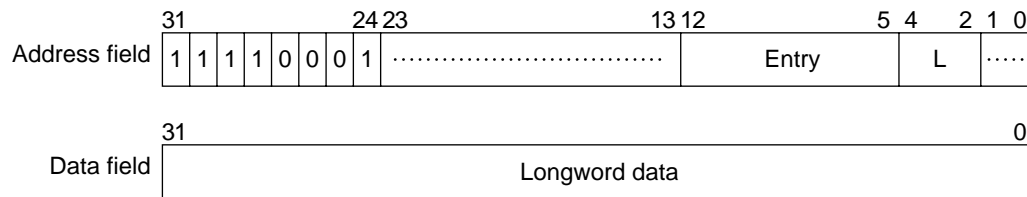

L : Longword specification bits  
 .... : Reserved bits (0 write value, undefined read value)

### 4.5.3 OC Address Array

The OC address array is allocated to addresses H'F400 0000 to H'F4FF FFFF in the P4 area. An address array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification. The entry to be accessed is specified in the address field, and the write tag, U bit, and V bit are specified in the data field.

In the address field, bits [31:24] have the value H'F4 indicating the OC address array, and the entry is specified by bits [13:5]. CCR.OIX and CCR.ORA have no effect on this entry specification. The address array bit [3] association bit (A bit) specifies whether or not association is performed when writing to the OC address array. As only longword access is used, 0 should be specified for address field bits [1:0].

In the data field, the tag is indicated by bits [31:10], the U bit by bit [1], and the V bit by bit [0]. As the OC address array tag is 19 bits in length, data field bits [31:29] are not used in the case of a write in which association is not performed. Data field bits [31:29] are used for the virtual address specification only in the case of a write in which association is performed.

The following three kinds of operation can be used on the OC address array:

1) OC address array read

The tag, U bit, and V bit are read into the data field from the OC entry corresponding to the entry set in the address field. In a read, associative operation is not performed regardless of whether the association bit specified in the address field is 1 or 0.

2) OC address array write (non-associative)


The tag, U bit, and V bit specified in the data field are written to the OC entry corresponding to the entry set in the address field. The A bit in the address field should be cleared to 0.

When a write is performed to a cache line for which the U bit and V bit are both 1, after write-back of that cache line, the tag, U bit, and V bit specified in the data field are written.

3) OC address array write (associative)

When a write is performed with the A bit in the address field set to 1, the tag stored in the entry specified in the address field is compared with the tag specified in the data field. If the MMU is enabled at this time, comparison is performed after the virtual address specified by data field bits [31:10] has been translated to a physical address using the UTLB. If the addresses match and the V bit is 1, the U bit and V bit specified in the data field are written into the OC entry. This operation is used to invalidate a specific OC entry. If the OC entry U bit is 1, and 0 is written to the V bit or to the U bit, write-back is performed. If a data TLB miss exception occurs during address translation, or the comparison shows a mismatch, no operation results and the write is not performed. If a data TLB multiple hit exception occurs during address translation, processing switches to the data TLB multiple hit exception handling routine.

**Figure 4.8** Memory-Mapped OC Address Array

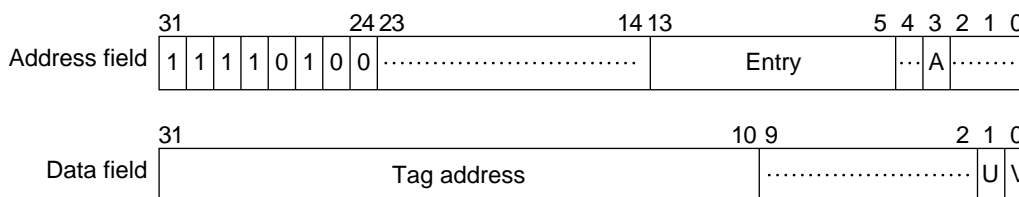

V : Validity bit

U : Dirty bit

A : Association bit

.... : Reserved bits (0 write value, undefined read value)

### 4.5.4 OC Data Array

The OC data array is allocated to addresses H'F500 0000 to H'F5FF FFFF in the P4 area. A data array access requires a 32-bit address field specification (when reading or writing) and a 32-bit data field specification. The entry to be accessed is specified in the address field, and the longword data to be written is specified in the data field.

In the address field, bits [31:24] have the value H'F5 indicating the OC data array, and the entry is specified by bits [13:5]. CCR.OIX and CCR.ORA have no effect on this entry specification. Address field bits [4:2] are used for the longword data specification in the entry. As only longword access is used, 0 should be specified for address field bits [1:0].

The data field is used for the longword data specification.

The following two kinds of operation can be used on the OC data array:


1) OC data array read

Longword data is read into the data field from the data specified by the longword specification bits in the address field in the OC entry corresponding to the entry set in the address field.

2) OC data array write

The longword data specified in the data field is written for the data specified by the longword specification bits in the address field in the OC entry corresponding the entry set in the address field. This write does not set the U bit to 1 on the address array side.

**Figure 4.9** Memory-Mapped OC Data Array

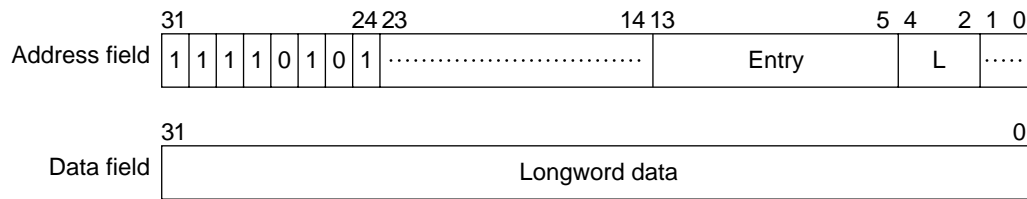

L : Longword specification bits  
 .... : Reserved bits (0 write value, undefined read value)


## 4.6 Store Queues

Two 32-byte store queues (SQs) are supported to perform high-speed writes to external memory.

### 4.6.1 SQ Configuration

There are two 32-byte store queues, SQ0 and SQ1, as shown in figure 4.10. These two store queues can be set independently.

**Figure 4.10** Store Queue Configuration

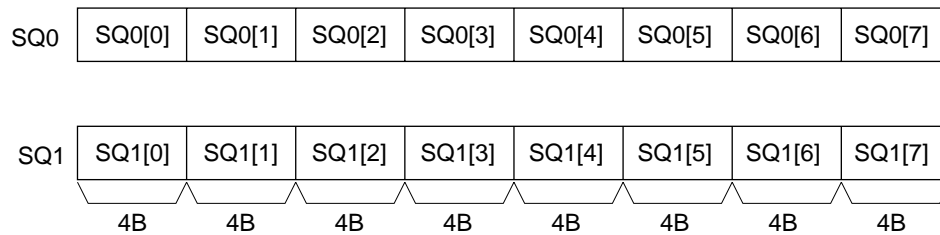

## 4.6.2 SQ Writes

A write to the SQs can be performed using a store instruction (MOV) on P4 area H'E000 0000 to H'E3FF FFFC. A longword or quadword access size can be used. The meaning of the address bits is as follows:

[31:26]:	111000	Store queue specification
[25:6]:	Don't care	Used for external memory transfer / access right
[5]:	0/1	0: SQ0 specification 1: SQ1 specification
[4:2]:	LW specification	Specifies longword position in SQ0/SQ1
[1:0]	00	Fixed at 0

## 4.6.3 Transfer to External Memory

Transfer from the SQs to external memory can be performed with a prefetch instruction (PREF). Issuing a PREF instruction for P4 area H'E000 0000 to H'E3FF FFFC starts a burst transfer from the SQs to external memory. The burst transfer length is fixed at 32 bytes, and the start address is always at a 32-byte boundary. While the contents of one SQ are being transferred to external memory, the other SQ can be written to without a penalty cycle, but writing to the SQ involved in the transfer to external memory is deferred until the transfer is completed.

The SQ transfer destination external memory address bit [28:0] specification is as shown below, according to whether the MMU is on or off.

- When MMU is on

The SQ area (H'E000 0000 to H'E3FF FFFF) is set in VPN of the UTLB, and the transfer destination external memory address in PPN. The ASID, V, SZ, SH, PR, and D bits have the same meaning as for normal address translation, but the C and WT bits have no meaning with regard to this page. Since burst transfer is prohibited for PCMCIA areas, the SA and TC bits also have no meaning.

When a prefetch instruction is issued for the SQ area, address translation is performed and external memory address bits [28:10] are generated in accordance with the SZ bit specification. For external memory address bits [9:5], the address prior to address translation is generated in the same way as when the MMU is off. External memory address bits [4:0] are fixed at 0. Transfer from the SQs to external memory is performed to this address.

- When MMU is off

The SQ area (H'E000 0000 to H'E3FF FFFF) is specified as the address at which a prefetch is performed. The meaning of address bits [31:0] is as follows:

[31:26]:	111000	Store queue specification
[25:6]:	Address	External memory address bits [25:6]
[5]:	0/1	0: SQ0 specification 1: SQ1 specification and external memory address bit [5]
[4:2]:	Don't care	No meaning in a prefetch
[1:0]	00	Fixed at 0

External memory address bits [28:26], which cannot be generated from the above address, are generated from the QACR0/1 registers.

QACR0 [4:2]: External memory address bits [28:26] corresponding to SQ0

QACR1 [4:2]: External memory address bits [28:26] corresponding to SQ1

External memory address bits [4:0] are always fixed at 0 since burst transfer starts at a 32-byte boundary.



#### **4.6.4 SQ Protection**

It is possible to set protection against SQ writes and transfers to external memory. If an SQ write violates the protection setting, an exception will be generated but the SQ contents will be corrupted. If a transfer from the SQs to external memory (prefetch instruction) violates the protection setting, the transfer to external memory will be inhibited and an exception will be generated.

- When MMU is on

Operation is in accordance with the address translation information recorded in the UTLB, and MMUCR.SQMD. Write type exception judgment is performed for writes to the SQs, and read type for transfer from the SQs to external memory (PREF instruction), and a TLB miss exception, protection violation exception, or initial page write exception is generated. However, if SQ access is enabled, in privileged mode only, by MMUCR.SQMD, an address error will be flagged in user mode even if address translation is successful.

- When MMU is off

Operation is in accordance with MMUCR.SQMD.

0: Privileged/user access possible

1: Privileged access possible

If the SQ area is accessed in user mode when MMUCR.SQMD is set to 1, an address error will be flagged.





## 5. Exceptions

### 5.1 Overview

#### 5.1.1 Features

Exception handling is processing handled by a special routine, separate from normal program processing, that is executed by the CPU in case of abnormal events. For example, if the executing instruction ends abnormally, appropriate action must be taken in order to return to the original program sequence, or report the abnormality before terminating the processing. The process of generating an exception handling request in response to abnormal termination, and passing control to a user-written exception handling routine, in order to support such functions, is given the generic name of exception handling.

SH7091 exception handling is of three kinds: for resets, general exceptions, and interrupts.

#### 5.1.2 Register Configuration

The registers used in exception handling are shown in table 5.1.

**Table 5.1** *Exception-Related Registers*

Name	Abbreviation	R/W	Initial Value*1	P4 Address*2	Area 7 Address*2	Access Size
TRAPA exception register	TRA	R/W	Undefined	H'FF00 0020	H'1F00 0020	32
Exception event register	EXPEVT	R/W	H'0000 0000/ H'0000 0020*1	H'FF00 0024	H'1F00 0024	32
Interrupt event register	INTEVT	R/W	Undefined	H'FF00 0028	H'1F00 0028	32

**Note:** H'0000 0000 is set in a power-on reset, and H'0000 0020 in a manual reset.  
This is the address when using the virtual/physical address space P4 area. When making an access from physical address space area 7 using the TLB, the upper 3 bits of the address are ignored.


## 5.2 Register Descriptions

There are three registers related to exception handling. These are allocated to memory, and can be accessed by specifying the P4 address or area 7 address.

- 1) The exception event register (EXPEVT) resides at P4 address H'FF00 0024, and contains a 12-bit exception code. The exception code set in EXPEVT is that for a reset or general exception event. The exception code is set automatically by hardware when an exception occurs. EXPEVT can also be modified by software.
- 2) The interrupt event register (INTEVT) resides at P4 address H'FF00 0028, and contains a 12-bit exception code. The exception code set in INTEVT is that for an interrupt request. The exception code is set automatically by hardware when an exception occurs. INTEVT can also be modified by software.
- 3) The TRAPA exception register (TRA) resides at P4 address H'FF00 0020, and contains 8-bit immediate data (imm) for the TRAPA instruction. TRA is set automatically by hardware when a TRAPA instruction is executed. TRA can also be modified by software.

The bit configurations of EXPEVT, INTEVT, and TRA are shown in figure 5.1.

Figure 5.1 Register Bit Configurations

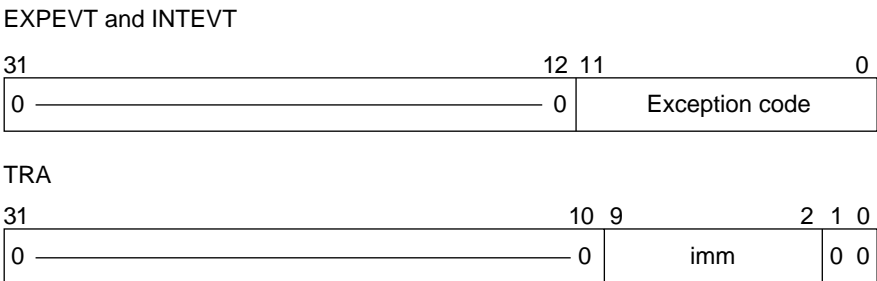

- 0: Reserved bits. These bits are always read as 0, and should only be written with 0.
- imm: 8-bit immediate data of the TRAPA instruction

## **5.3 Exception Handling Functions**

### **5.3.1 Exception Handling Flow**

In exception handling, the contents of the program counter (PC) and status register (SR) are saved in the saved program counter (SPC) and saved status register (SSR), and the CPU starts execution of the appropriate exception handling routine according to the vector address. An exception handling routine is a program written by the user to handle a specific exception. The exception handling routine is terminated and control returned to the original program by executing a return-from-exception instruction (RTE). This instruction restores the PC and SR contents and returns control to the normal processing routine at the point at which the exception occurred.

The basic processing flow is as follows. See section 2, Data Formats and Registers, for the meaning of the individual SR bits.

- 1) The PC and SR contents are saved in SPC and SSR.
- 2) The block bit (BL) in SR is set to 1.
- 3) The mode bit (MD) in SR is set to 1.
- 4) The register bank bit (RB) in SR is set to 1.
- 5) In a reset, the FPU disable bit (FD) in SR is cleared to 0.
- 6) The exception code is written to bits 11–0 of the exception event register (EXPEVT) or interrupt event register (INTEVT).
- 7) The CPU branches to the determined exception handling vector address, and the exception handling routine begins.

### **5.3.2 Exception Handling Vector Addresses**

The reset vector address is fixed at H'A000 0000. Exception and interrupt vector addresses are determined by adding the offset for the specific event to the vector base address, which is set by software in the vector base register (VBR). In the case of the TLB miss exception, for example, the offset is H'0000 0400, so if H'9C08 0000 is set in VBR, the exception handling vector address will be H'9C08 0400. If a further exception occurs at the exception handling vector address, a duplicate exception will result, and recovery will be difficult; therefore, fixed physical addresses (P1, P2) should be specified for vector addresses.

## 5.4 Exception Types and Priorities

Table 5.2 shows the types of exceptions, with their relative priorities, vector addresses, and exception/interrupt codes.

**Table 5.2** *Exceptions*

Exception Category	Execution Mode	Exception	Priority Level	Priority Order	Vector Address	Offset	Exception Code
Reset	Abort type	Power-on reset	1	1	H'A000 0000	—	H'000
		Manual reset	1	2	H'A000 0000	—	H'020
		Hitachi-UDI reset	1	1	H'A000 0000	—	H'000
		Instruction TLB multiple-hit exception	1	3	H'A000 0000	—	H'140
		Data TLB multiple-hit exception	1	4	H'A000 0000	—	H'140

Exception Category	Execution Mode	Exception	Priority Level	Priority Order	Vector Address	Offset	Exception Code
General exception	Re-execution type	User break before instruction execution*1	2	0	(VBR/DBR)	H'100/—	H'1E0
		Instruction address error	2	1	(VBR)	H'100	H'0E0
		Instruction TLB miss exception	2	2	(VBR)	H'400	H'040
		Instruction TLB protection violation exception	2	3	(VBR)	H'100	H'0A0
		General illegal instruction exception	2	4	(VBR)	H'100	H'180
		Slot illegal instruction exception	2	4	(VBR)	H'100	H'1A0
		General FPU disable exception	2	4	(VBR)	H'100	H'800
		Slot FPU disable exception	2	4	(VBR)	H'100	H'820
		Data address error (read)	2	5	(VBR)	H'100	H'0E0
		Data address error (write)	2	5	(VBR)	H'100	H'100
		Data TLB miss exception (read)	2	6	(VBR)	H'400	H'040
		Data TLB miss exception (write)	2	6	(VBR)	H'400	H'060
		Data TLB protection violation exception (read)	2	7	(VBR)	H'100	H'0A0
		Data TLB protection violation exception (write)	2	7	(VBR)	H'100	H'0C0
		FPU exception	2	8	(VBR)	H'100	H'120
		Initial page write exception	2	9	(VBR)	H'100	H'080
	Completion type	Unconditional trap (TRAPA)	2	4	(VBR)	H'100	H'160
		User break after instruction execution*1	2	10	(VBR/DBR)	H'100/—	H'1E0
Interrupt	Completion type	Nonmaskable interrupt	3	—	(VBR)	H'600	H'1C0

Exception Category	Execution Mode	Exception			Priority Level	Priority Order	Vector Address	Offset	Exception Code	
		External interrupts	IRL3–IRL0	0	4	*2	(VBR)	H'600	H'200	
				1					H'220	
				2					H'240	
				3					H'260	
				4					H'280	
				5					H'2A0	
				6					H'2C0	
				7					H'2E0	
				8					H'300	
				9					H'320	
				A					H'340	
				B					H'360	
				C					H'380	
				D					H'3A0	
				E					H'3C0	
		Peripheral module interrupt (module/source)	TMU0	TUNI0	4	*2	(VBR)	H'600	H'400	
			TMU1	TUNI1						H'420
			TMU2	TUNI2						H'440
				TICPI2						H'460
			RTC	ATI						H'480
				PRI						H'4A0
				CUI						H'4C0
			SCI	ERI						H'4E0
			SCI	RXI						H'500
				TXI						H'520
				TEI					H'540	
			WDT	ITI					H'560	



Exception Category	Execution Mode	Exception			Priority Level	Priority Order	Vector Address	Offset	Exception Code
			REF	RCMI					H'580
				ROVI					H'5A0
			Hitachi-UDI	Hitachi-UDI					H'600
Interrupt	Completion type	Peripheral module interrupt (module/source)	DMAC	DMTE0	4	*2	(VBR)	H'600	H'640
				DMTE1					H'660
				DMTE2					H'680
				DMTE3					H'6A0
				DMAE					H'6C0
			SCIF	ERI					H'700
				RXI					H'720
				BRI					H'740
				TXI					H'760

Priority: Priority is first assigned by priority level, then by priority order within each level (the lowest number represents the highest priority).

Exception transition destination: Control passes to H'A000 0000 in a reset, and to [VBR + offset] in other cases.

Exception code: Stored in EXPEVT for a reset or general exception, and in INTEVT for an interrupt.

IRL: Interrupt request level (pins IRL3–IRL0).

Module/source: See the sections on the relevant peripheral modules.


**Note:** When BRCR.UBDE = 1, PC = DBR. In other cases, PC = VBR + H'100.  
The priority order of external interrupts and peripheral module interrupts can be set by software.

## 5.5 Exception Flow

### 5.5.1 Exception Flow

Figure 5.2 shows an outline flowchart of the basic operations in instruction execution and exception handling. For the sake of clarity, the following description assumes that instructions are executed sequentially, one by one. Figure 5.2 shows the relative priority order of the different kinds of exceptions (reset/general exception/interrupt). Register settings in the event of an exception are shown only for SSR, SPC, EXPEVT/INTEVT, SR, and PC, but other registers may be set automatically by hardware, depending on the exception. For details, see section 5.6, Description of Exceptions. Also, see section 5.6.4, Priority Order with Multiple Exceptions, for exception handling during execution of a delayed branch instruction and a delay slot instruction, and in the case of instructions in which two data accesses are performed.


**Figure 5.2** *Instruction Execution and Exception Handling*

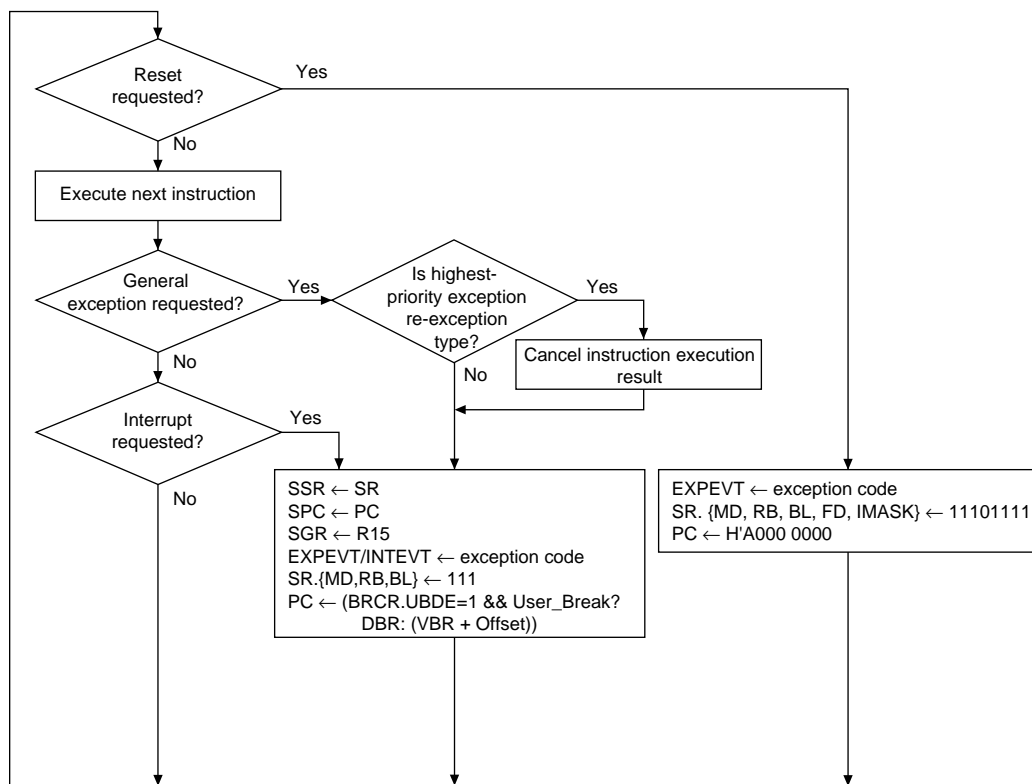

## 5.5.2 Exception Source Acceptance

A priority ranking is provided for all exceptions for use in determining which of two or more simultaneously generated exceptions should be accepted. Five of the general exceptions—the general illegal instruction exception, slot illegal instruction exception, general FPU disable exception, slot FPU disable exception, and unconditional trap exception—are detected in the process of instruction decoding, and do not occur simultaneously in the instruction pipeline. These exceptions therefore all have the same priority. General exceptions are detected in the order of instruction execution. However, exception handling is performed in the order of instruction flow (program order). Thus, an exception for an earlier instruction is accepted before that for a later instruction. An example of the order of acceptance for general exceptions is shown in figure 5.3.

Figure 5.3 Example of General Exception Acceptance Order

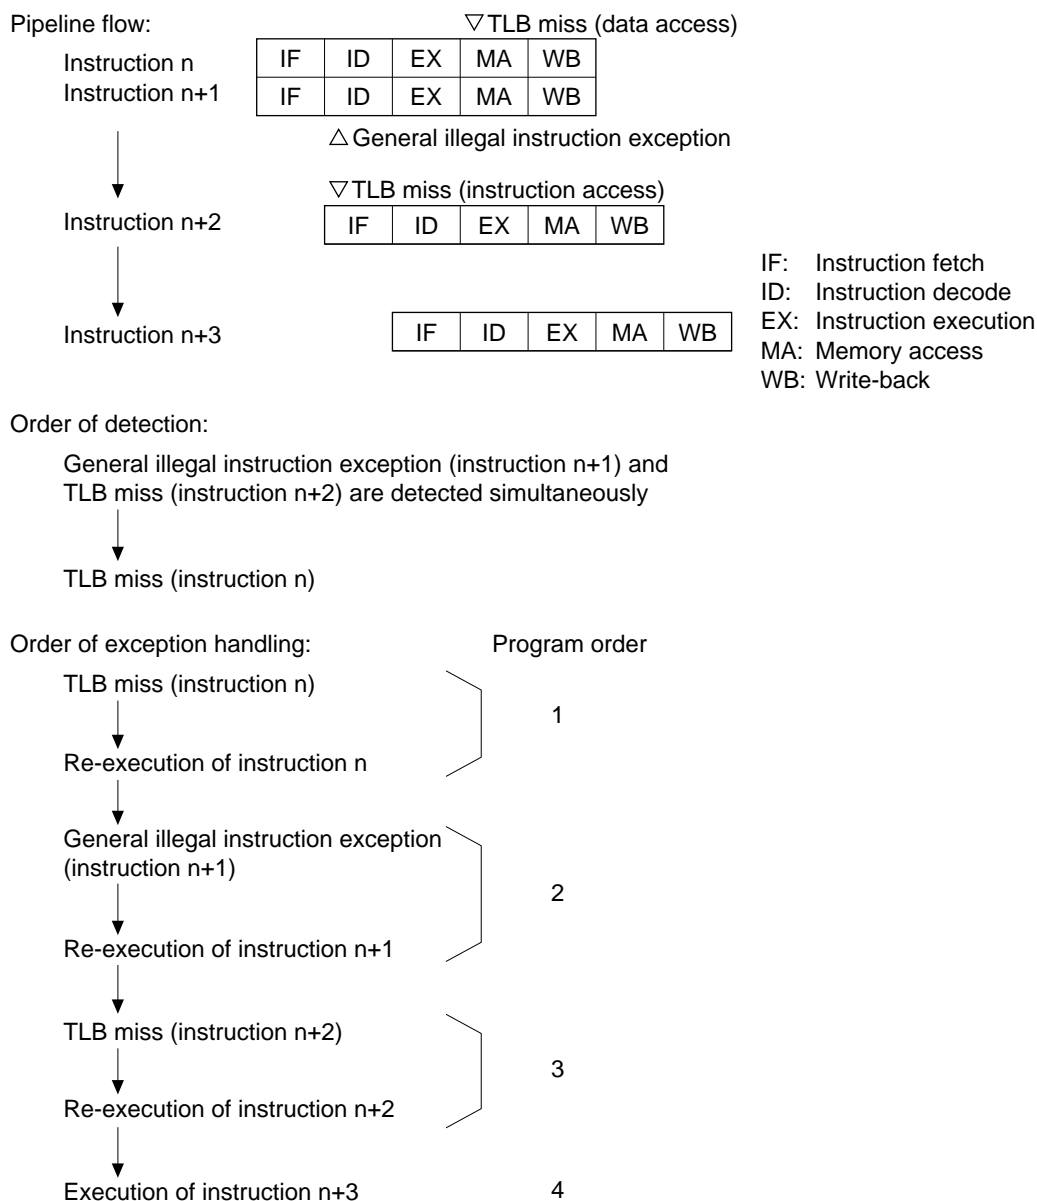

### 5.5.3 Exception Requests and BL Bit

When the BL bit in SR is 0, exceptions and interrupts are accepted.

When the BL bit in SR is 1 and an exception other than a user break is generated, the CPU's internal registers are set to their post-reset state, the registers of the other modules retain their contents prior to the exception, and the CPU branches to the same address as in a reset (H'A000 0000). For the operation in the event of a user break, see section 20, User Break Controller. If an ordinary interrupt occurs, the interrupt request is held pending and is accepted after the BL bit has been cleared to 0 by software. If a nonmaskable interrupt (NMI) occurs, it can be held pending or accepted according to the setting made by software.

Thus, normally, SPC and SSR are saved and then the BL bit in SR is cleared to 0, to enable multiple exception state acceptance.

## 5.5.4 Return from Exception Handling

The RTE instruction is used to return from exception handling. When the RTE instruction is executed, the SPC contents are restored to PC and the SSR contents to SR, and the CPU returns from the exception handling routine by branching to the SPC address. If SPC and SSR were saved to external memory, set the BL bit in SR to 1 before restoring the SPC and SSR contents and issuing the RTE instruction.

## 5.6 Description of Exceptions

The various exception handling operations are described here, covering exception sources, transition addresses, and processor operation when a transition is made.

### 5.6.1 Resets

#### Power-On Reset

- Sources:

—SCK2 pin high level and RESET pin low level

—When the watchdog timer overflows while the WT/IT bit is set to 1 and the RSTS bit is cleared to 0 in WTCSR. For details, see section 10, Clock Oscillation Circuits.

- Transition address: H'A000 0000

- Transition operations:

Exception code H'000 is set in EXPEVT, initialization of VBR and SR is performed, and a branch is made to PC = H'A000 0000.

In the initialization processing, the VBR register is set to H'0000 0000, and in SR, the MD, RB, and BL bits are set to 1, the FD bit is cleared to 0, and the interrupt mask bits (I3–I0) are set to B'1111.

CPU and on-chip peripheral module initialization is performed. For details, see the register descriptions in the relevant sections. For some CPU functions, the TRST pin and RESET pin must be driven low. It is therefore essential to execute a power-on reset and drive the TRST pin low when powering on.

```
Power_on_reset()  
{  
    EXPEVT = H'00000000;  
    VBR = H'00000000;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    SR.(I0-I3) = B'1111;  
    SR.FD=0;  
    Initialize_CPU();  
    Initialize_Module(PowerOn);  
    PC = H'A0000000;  
}
```

### Manual Reset

- Sources:
  - SCK2 pin low level and RESET pin low level
  - When a general exception other than a user break occurs while the BL bit is set to 1 in SR
  - When the watchdog timer overflows while the RSTS bit is set to 1 in WTCSR. For details, see section 10, Clock Oscillation Circuits.
- Transition address: H'A000 0000
- Transition operations:

Exception code H'020 is set in EXPEVT, initialization of VBR and SR is performed, and a branch is made to PC = H'A000 0000.

In the initialization processing, the VBR register is set to H'0000 0000, and in SR, the MD, RB, and BL bits are set to 1, the FD bit is cleared to 0, and the interrupt mask bits (I3–I0) are set to B'1111.

CPU and on-chip peripheral module initialization is performed. For details, see the register descriptions in the relevant sections.

```
Manual_reset()
{
    EXPEVT = H'00000020;
    VBR = H'00000000;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    SR.(I0–I3) = B'1111;
    SR.FD = 0;
    Initialize_CPU();
    Initialize_Module(Manual);
    PC = H'A0000000;
}
```

**Table 5.3** *Types of Reset*

Type	Reset State Transition Conditions		Internal States	
	SCK2	RESET	CPU	On-Chip Peripheral Modules
Power-on reset	High	Low	Initialized	See Register Configuration in each section
Manual reset	Low	Low	Initialized	

### **Hitachi-UDI Reset**

- Source: SDIR.TI3–TI0 = B'0110 (negation) or B'0111 (assertion)
- Transition address: H'A000 0000
- Transition operations:

Exception code H'000 is set in EXPEVT, initialization of VBR and SR is performed, and a branch is made to PC = H'A000 0000.

In the initialization processing, the VBR register is set to H'0000 0000, and in SR, the MD, RB, and BL bits are set to 1, the FD bit is cleared to 0, and the interrupt mask bits (I3–I0) are set to B'1111.

CPU and on-chip peripheral module initialization is performed. For details, see the register descriptions in the relevant sections.

```
Hitachi-UDI_reset()  
{  
    EXPEVT = H'00000000;  
    VBR = H'00000000;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    SR.(I0–I3) = B'1111;  
    SR.FD = 0;  
    Initialize_CPU();  
    Initialize_Module(PowerOn);  
    PC = H'A0000000;  
}
```

### **Instruction TLB Multiple-Hit Exception**

- Source: Multiple ITLB address matches
- Transition address: H'A000 0000
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

Exception code H'140 is set in EXPEVT, initialization of VBR and SR is performed, and a branch is made to PC = H'A000 0000.

In the initialization processing, the VBR register is set to H'0000 0000, and in SR, the MD, RB, and BL bits are set to 1, the FD bit is cleared to 0, and the interrupt mask bits (I3–I0) are set to B'1111.

CPU and on-chip peripheral module initialization is performed in the same way as in a manual reset. For details, see the register descriptions in the relevant sections.

```
TLB_multi_hit()
{
    TEA = EXCEPTION_ADDRESS;
    PTEH.VPN = PAGE_NUMBER;
    EXPEVT = H'00000140;
    VBR = H'00000000;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    SR.(I0-I3) = B'1111;
    SR.FD = 0;
    Initialize_CPU();
    Initialize_Module(Manual);
    PC = H'A0000000;
}
```

### **Operand TLB Multiple-Hit Exception**

- Source: Multiple UTLB address matches
- Transition address: H'A000 0000
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

Exception code H'140 is set in EXPEVT, initialization of VBR and SR is performed, and a branch is made to PC = H'A000 0000.

In the initialization processing, the VBR register is set to H'0000 0000, and in SR, the MD, RB, and BL bits are set to 1, the FD bit is cleared to 0, and the interrupt mask bits (I3–I0) are set to B'1111.

CPU and on-chip peripheral module initialization is performed in the same way as in a manual reset. For details, see the register descriptions in the relevant sections.

```
TLB_multi_hit()
{
    TEA = EXCEPTION_ADDRESS;
    PTEH.VPN = PAGE_NUMBER;
    EXPEVT = H'00000140;
    VBR = H'00000000;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    SR.(I0-I3) = B'1111;
    SR.FD = 0;
    Initialize_CPU();
    Initialize_Module(PowerOn);
    PC = H'A0000000;
}
```

## 5.6.2 General Exceptions

### Data TLB Miss Exception

- Source: Address mismatch in UTLB address comparison
- Transition address: VBR + H'0000 0400
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'040 (for a read access) or H'060 (for a write access) is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0400.

To speed up TLB miss processing, the offset is separate from that of other exceptions.

```
Data_TLB_miss_exception()  
{  
    TEA = EXCEPTION_ADDRESS;  
    PTEH.VPN = PAGE_NUMBER;  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = read_access ? H'00000040 : H'00000060;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000400;  
}
```

### Instruction TLB Miss Exception

- Source: Address mismatch in ITLB address comparison
- Transition address: VBR + H'0000 0400
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'040 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0400.

To speed up TLB miss processing, the offset is separate from that of other exceptions.



```

ITLB_miss_exception()
{
    TEA = EXCEPTION_ADDRESS;
    PTEH.VPN = PAGE_NUMBER;
    SPC = PC;
    SSR = SR;
    EXPEVT = H'00000040;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    PC = VBR + H'00000400;
}

```

### Initial Page Write Exception

- Source: TLB is hit in a store access, but dirty bit D = 0
- Transition address: VBR + H'0000 0100
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'080 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```

Initial_write_exception()
{
    TEA = EXCEPTION_ADDRESS;
    PTEH.VPN = PAGE_NUMBER;
    SPC = PC;
    SSR = SR;
    EXPEVT = H'00000080;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    PC = VBR + H'00000100;
}

```

### Data TLB Protection Violation Exception

- Source: The access does not accord with the UTLB protection information (PR bits) shown below.

PR	Privileged Mode	User Mode
00	Only read access possible	Access not possible
01	Read/write access possible	Access not possible
10	Only read access possible	Only read access possible
11	Read/write access possible	Read/write access possible

- Transition address: VBR + H'0000 0100
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'0A0 (for a read access) or H'0C0 (for a write access) is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```
Data_TLB_protection_violation_exception()  
{  
    TEA = EXCEPTION_ADDRESS;  
    PTEH.VPN = PAGE_NUMBER;  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = read_access ? H'000000A0 : H'000000C0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### Instruction TLB Protection Violation Exception

- Source: The access does not accord with the ITLB protection information (PR bits) shown below.

PR	Privileged Mode	User Mode
0	Access possible	Access not possible
1	Access possible	Access possible

- Transition address: VBR + H'0000 0100
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'0A0 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```
ITLB_protection_violation_exception()  
{  
    TEA = EXCEPTION_ADDRESS;  
    PTEH.VPN = PAGE_NUMBER;  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = H'000000A0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### **Data Address Error**

- Sources:

- Word data access from other than a word boundary ( $2n + 1$ )

- Longword data access from other than a longword data boundary ( $4n + 1$ ,  $4n + 2$ , or  $4n + 3$ )

- Quadword data access from other than a quadword data boundary ( $8n + 1$ ,  $8n + 2$ ,  $8n + 3$ ,  $8n + 4$ ,  $8n + 5$ ,  $8n + 6$ , or  $8n + 7$ )

- Access to area H'8000 0000–H'FFFF FFFF in user mode

- Transition address: VBR + H'0000 0100

- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'0E0 (for a read access) or H'100 (for a write access) is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100. For details, see section 3, Memory Management Unit (MMU).

```
Data_address_error()  
{  
    TEA = EXCEPTION_ADDRESS;  
    PTEN.VPN = PAGE_NUMBER;  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = read_access? H'000000E0: H'00000100;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### **Instruction Address Error**

- Sources:
  - Instruction fetch from other than a word boundary ( $2n+1$ )
  - Instruction fetch from area H'8000 0000–H'FFFF FFFF in user mode
- Transition address: VBR + H'0000 0100
- Transition operations:

The virtual address (32 bits) at which this exception occurred is set in TEA, and the corresponding virtual page number (22 bits) is set in PTEH [31:10]. ASID in PTEH indicates the ASID when this exception occurred.

The PC and SR contents for the instruction at which this exception occurred are saved in the SPC and SSR. Exception code H'0E0 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100. For details, see section 3, Memory Management Unit (MMU).

```
Instruction_address_error()  
{  
    TEA = EXCEPTION_ADDRESS;  
    PTEN.VPN = PAGE_NUMBER;  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = H'000000E0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### **Unconditional Trap**

- Source: Execution of TRAPA instruction
- Transition address: VBR + H'0000 0100
- Transition operations:

As this is a processing-completion-type exception, the PC contents for the instruction following the TRAPA instruction are saved in SPC. The value of SR when the TRAPA instruction is executed are saved in SSR. The 8-bit immediate value in the TRAPA instruction is multiplied by 4, and the result is set in TRA [9:0].

Exception code H'160 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```
TRAPA_exception()  
{  
    SPC = PC + 2;  
    SSR = SR;  
    TRA = imm << 2;  
    EXPEVT = H'00000160;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

**General Illegal Instruction Exception**

- Sources:

—Decoding of an undefined instruction not in a delay slot

Delayed branch instructions: JMP, JSR, BRA, BRAF, BSR, BSRF, RTS, RTE, BT/S, BF/S

Undefined instruction: H'FFFD

—Decoding in user mode of a privileged instruction not in a delay slot

Privileged instructions: LDC, STC, RTE, LDTLB, SLEEP, but excluding LDC/STC instructions that access GBR

- Transition address: VBR + H'0000 0100

- Transition operations:

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'180 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100. Operation is not guaranteed if an undefined code other than H'FFFD is decoded.

```
General_illegal_instruction_exception()  
{  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = H'00000180;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

**Slot Illegal Instruction Exception**

- Sources:

—Decoding of an undefined instruction in a delay slot

Delayed branch instructions: JMP, JSR, BRA, BRAF, BSR, BSRF, RTS, RTE, BT/S, BF/S

Undefined instruction: H'FFFD

—Decoding of an instruction that modifies PC in a delay slot

Instructions that modify PC: JMP, JSR, BRA, BRAF, BSR, BSRF, RTS, RTE, BT, BF, BT/S, BF/S, TRAPA, LDC Rm, SR, LDC.L @Rm+, SR

—Decoding in user mode of a privileged instruction in a delay slot

Privileged instructions: LDC, STC, RTE, LDTLB, SLEEP, but excluding LDC/STC instructions that access GBR

—Decoding of a PC-relative MOV instruction or MOVA instruction in a delay slot

- Transition address: VBR + H'0000 0100

- Transition operations:

The PC contents for the preceding delayed branch instruction are saved in SPC. The SR contents when this exception occurred are saved in SSR.

Exception code H'1A0 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100. Operation is not guaranteed if an undefined code other than H'FFFD is decoded.

```
Slot_illegal_instruction_exception()  
{  
    SPC = PC - 2;  
    SSR = SR;  
    EXPEVT = H'000001A0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### General FPU Disable Exception

- Source: Decoding of an FPU instruction\* not in a delay slot with SR.FD =1
- Transition address: VBR + H'0000 0100
- Transition operations:

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR.

Exception code H'800 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

---

**Note:** \*FPU instructions are instructions in which the first 4 bits of the instruction code are F (but excluding undefined instruction H'FFFD), and the LDS, STS, LDS.L, and STS.L instructions corresponding to FPUL and FPSCR.

---

```
General_fpu_disable_exception()  
{  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = H'00000800;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### Slot FPU Disable Exception

- Source: Decoding of an FPU instruction in a delay slot with SR.FD =1
- Transition address: VBR + H'0000 0100
- Transition operations:

The PC contents for the preceding delayed branch instruction are saved in SPC. The SR contents when this exception occurred are saved in SSR.

Exception code H'820 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```
Slot_fpu_disable_exception()  
{  
    SPC = PC - 2;  
    SSR = SR;  
    EXPEVT = H'00000820;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

### **User Breakpoint Trap**

- Source: Fulfilling of a break condition set in the user break controller
- Transition address: VBR + H'0000 0100, or DBR
- Transition operations:

In the case of a post-execution break, the PC contents for the instruction following the instruction at which the breakpoint is set are set in SPC. In the case of a pre-execution break, the PC contents for the instruction at which the breakpoint is set are set in SPC.

The SR contents when the break occurred are saved in SSR. Exception code H'1E0 is set in EXPEVT.

The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100. It is also possible to branch to PC = DBR.

For details of PC, etc., when a data break is set, see section 20, User Break Controller.

```
User_break_exception()  
{  
    SPC = (pre_execution break? PC : PC + 2);  
    SSR = SR;  
    EXPEVT = H'000001E0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = (BRCR.UBDE==1 ? DBR : VBR + H'00000100);  
}
```

### **FPU Exception**

- Source: Exception due to execution of a floating-point operation
- Transition address: VBR + H'0000 0100
- Transition operations:

The PC and SR contents for the instruction at which this exception occurred are saved in SPC and SSR. Exception code H'120 is set in EXPEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0100.

```
FPU_exception()  
{  
    SPC = PC;  
    SSR = SR;  
    EXPEVT = H'00000120;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000100;  
}
```

## **5.6.3 Interrupts**

### **NMI**

- Source: NMI pin edge detection
- Transition address: VBR + H'0000 0600
- Transition operations:

The PC and SR contents for the instruction at which this exception is accepted are saved in SPC and SSR. Exception code H'1C0 is set in INTEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to PC = VBR + H'0600. When the BL bit in SR is 0, this interrupt is not masked by the interrupt mask bits in SR, and is accepted at the highest priority level. When the BL bit in SR is 1, a software setting can specify whether this interrupt is to be masked or accepted. For details, see section 19, Interrupt Controller.

```
NMI()  
{  
    SPC = PC;  
    SSR = SR;  
    INTEVT = H'000001C0;  
    SR.MD = 1;  
    SR.RB = 1;  
    SR.BL = 1;  
    PC = VBR + H'00000600;  
}
```

### **IRL Interrupts**

- Source: The interrupt mask bit setting in SR is smaller than the IRL (3–0) level, and the BL bit in SR is 0 (accepted at instruction boundary).
- Transition address: VBR + H'0000 0600
- Transition operations:



The PC contents immediately after the instruction at which the interrupt is accepted are set in SPC. The SR contents at the time of acceptance are set in SSR.

The code corresponding to the IRL (3–0) level is set in INTEVT. See table 19.5, Interrupt Exception Handling Sources and Priority Order, for the corresponding codes. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to VBR + H'0600. The acceptance level is not set in the interrupt mask bits in SR. When the BL bit in SR is 1, the interrupt is masked. For details, see section 19, Interrupt Controller.

```
IRL( )
{
    SPC = PC;
    SSR = SR;
    INTEVT = H'00000200 ~ H'000003C0;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    PC = VBR + H'00000600;
}
```

### Peripheral Module Interrupts

- Source: The interrupt mask bit setting in SR is smaller than the peripheral module (Hitachi-UDI, DMAC, TMU, RTC, SCI, SCIF, WDT, or REF) interrupt level, and the BL bit in SR is 0 (accepted at instruction boundary).
- Transition address: VBR + H'0000 0600
- Transition operations:

The PC contents immediately after the instruction at which the interrupt is accepted are set in SPC. The SR contents at the time of acceptance are set in SSR.

The code corresponding to the interrupt source is set in INTEVT. The BL, MD, and RB bits are set to 1 in SR, and a branch is made to VBR + H'0600. The module interrupt levels should be set as values between B'0000 and B'1111 in the interrupt priority registers (IPRA–IPRC) in the interrupt controller. For details, see section 19, Interrupt Controller.

```
Module_interruption( )
{
    SPC = PC;
    SSR = SR;
    INTEVT = H'00000400 ~ H'00000760;
    SR.MD = 1;
    SR.RB = 1;
    SR.BL = 1;
    PC = VBR + H'00000600;
}
```

## 5.6.4 Priority Order with Multiple Exceptions

With some instructions, such as instructions that make two accesses to memory, and the indivisible pair comprising a delayed branch instruction and delay slot instruction, multiple exceptions occur. Care is required in these cases, as the exception priority order differs from the normal order.

### 1) Instructions that make two accesses to memory

With MAC instructions, memory-to-memory arithmetic/logic instructions, and TAS instructions, two data transfers are performed by a single instruction, and an exception will be detected for each of these data transfers. In these cases, therefore, the following order is used to determine priority.

- a) Data address error in first data transfer
- b) TLB miss in first data transfer
- c) TLB protection violation in first data transfer
- d) Initial page write exception in first data transfer
- e) Data address error in second data transfer
- f) TLB miss in second data transfer
- g) TLB protection violation in second data transfer
- h) Initial page write exception in second data transfer

### 2) Indivisible delayed branch instruction and delay slot instruction

As a delayed branch instruction and its associated delay slot instruction are indivisible, they are treated as a single instruction. Consequently, the priority order for exceptions that occur in these instructions differs from the usual priority order. The priority order shown below is for the case where the delay slot instruction has only one data transfer.

- a) The delayed branch instruction is checked for priority levels 1 and 2.
- b) The delay slot instruction is checked for priority levels 1 and 2.
- c) A check is performed for priority level 3 in the delayed branch instruction and priority level 3 in the delay slot instruction. (There is no priority ranking between these two.)
- d) A check is performed for priority level 4 in the delayed branch instruction and priority level 4 in the delay slot instruction. (There is no priority ranking between these two.)

If the delay slot instruction has a second data transfer, two checks are performed in step b, as in 1 above.

If the accepted exception (the highest-priority exception) is a delay slot instruction re-execution type exception, the branch instruction PR register write operation (PC  $\oplus$  PR operation performed in BSR, BSRF, JSR) is inhibited.

## 5.7 Usage Notes

### 1) Return from exception handling

- a) Check the BL bit in SR with software. If SPC and SSR have been saved to external memory, set the BL bit in SR to 1 before restoring them.
- b) Issue an RTE instruction. When RTE is executed, the SPC contents are set in PC, the SSR contents are set in SR, and branch is made to the SPC address to return from the exception handling routine.

### 2) If an exception or interrupt occurs when SR.BL = 1

#### a) Exception

When an exception other than a user break occurs, the CPU's internal registers are set to their post-reset state, the registers of the other modules retain their contents prior to the exception, and the CPU branches to the same address as in a reset (H'A000 0000). The value in EXPEVT at this time is H'0000 0020; the value of the SPC and SSR registers is undefined.

#### b) Interrupt

If an ordinary interrupt occurs, the interrupt request is held pending and is accepted after the BL bit in SR has been cleared to 0 by software. If a nonmaskable interrupt (NMI) occurs, it can be held pending or accepted according to the setting made by software. In the sleep or standby state, however, an interrupt is accepted even if the BL bit in SR is set to 1.

### 3) SPC when an exception occurs

#### a) Re-execution type exception

The PC value for the instruction in which the exception occurred is set in SPC, and the instruction is re-executed after returning from exception handling. If an exception occurs in a delay slot instruction, however, the PC value for the delay slot instruction is saved in SPC regardless of whether or not the preceding delay slot instruction condition is satisfied.

#### b) Completion type exception or interrupt

The PC value for the instruction following that in which the exception occurred is set in SPC. If an exception occurs in a branch instruction with delay slot, however, the PC value for the branch destination is saved in SPC.

### 4) An exception must not be generated in an RTE instruction delay slot, as the operation will be undefined in this case.





## 6. Floating-Point Unit

---

### 6.1 Overview

The floating-point unit (FPU) has the following features:

- Conforms to IEEE754 standard
- 32 single-precision floating-point registers (can also be referenced as 16 double-precision registers)
- Two rounding modes: Round to Nearest and Round to Zero
- Two denormalization modes: Flush to Zero and Treat Denormalized Number
- Six exception sources: FPU Error, Invalid Operation, Divide By Zero, Overflow, Underflow, and Inexact
- Comprehensive instructions: Single-precision, double-precision, graphics support, system control

When the FD bit in SR is set to 1, the FPU cannot be used, and an attempt to execute an FPU instruction will cause an FPU disable exception.

### 6.2 Data Formats


#### 6.2.1 Floating-Point Format

A floating-point number consists of the following three fields:


- Sign (s)
- Exponent (e)
- Fraction (f)

The SH7091 can handle single-precision and double-precision floating-point numbers, using the formats shown in figures 6.1 and 6.2.

**Figure 6.1** *Format of Single-Precision Floating-Point Number*



**Figure 6.2** Format of Double-Precision Floating-Point Number



The exponent is expressed in biased form, as follows:

$$e = E + \text{bias}$$

The range of unbiased exponent  $E$  is  $E_{\min} - 1$  to  $E_{\max} + 1$ . The two values  $E_{\min} - 1$  and  $E_{\max} + 1$  are distinguished as follows.  $E_{\min} - 1$  indicates zero (both positive and negative sign) and a denormalized number, and  $E_{\max} + 1$  indicates positive or negative infinity or a non-number (NaN). Table 1 shows bias,  $E_{\min}$ , and  $E_{\max}$  values.

**Table 6.1** Floating-Point Number Formats and Parameters

Parameter	Single-Precision	Double-Precision
Total bit width	32 bits	64 bits
Sign bit	1 bit	1 bit
Exponent field	8 bits	11 bits
Fraction field	23 bits	52 bits
Precision	24 bits	53 bits
Bias	+127	+1023
$E_{\max}$	+127	+1023
$E_{\min}$	-126	-1022

Floating-point number value  $v$  is determined as follows:

- If  $E = E_{\max} + 1$  and  $f \neq 0$ ,  $v$  is a non-number (NaN) irrespective of sign  $s$
- If  $E = E_{\max} + 1$  and  $f = 0$ ,  $v = (-1)^s$  (infinity) [positive or negative infinity]
- If  $E_{\min} \leq E \leq E_{\max}$ ,  $v = (-1)^s 2^E (1.f)$  [normalized number]
- If  $E = E_{\min} - 1$  and  $f \neq 0$ ,  $v = (-1)^s 2^{E_{\min}} (0.f)$  [denormalized number]
- If  $E = E_{\min} - 1$  and  $f = 0$ ,  $v = (-1)^s 0$  [positive or negative zero]

Table 6.2 shows the ranges of the various numbers in hexadecimal notation.

**Table 6.2 Floating-Point Ranges**

Type	Single-Precision	Double-Precision
Signaling non-number	H'7FFFFFFF to H'7FC00000	H'7FFFFFFF H'FFFFFFF to H'7FF80000 H'00000000
Quiet non-number	H'7FBFFFFF to H'7F800001	H'7FF7FFFF H'FFFFFFF to H'7FF00000 H'00000001
Positive infinity	H'7F800000	H'7FF00000 H'000000
Positive normalized number	H'7F7FFFFF to H'00800000	H'7FEFFFFF H'FFFFFFF to H'00100000 H'00000000
Positive denormalized number	H'007FFFFF to H'00000001	H'000FFFFF H'FFFFFFF to H'00000000 H'00000001
Positive zero	H'00000000	H'00000000 H'00000000
Negative zero	H'80000000	H'80000000 H'00000000
Negative denormalized number	H'80000001 to H'807FFFFF	H'80000000 H'00000001 to H'800FFFFF H'FFFFFFF
Negative normalized number	H'80800000 to H'FF7FFFFF	H'80100000 H'00000000 to H'FFEFFFFF H'FFFFFFF
Negative infinity	H'FF800000	H'FFF00000 H'00000000
Quiet non-number	H'FF800001 to H'FFBFFFFF	H'FFF00000 H'00000001 to H'FFF7FFFF H'FFFFFFF
Signaling non-number	H'FFC00000 to H'FFFFFFF	H'FFF80000 H'00000000 to H'FFFFFFF H'FFFFFFF


## 6.2.2 Non-Numbers (NaN)

Figure 6.3 shows the bit pattern of a non-number (NaN). A value is NaN in the following case:

- Sign bit: Don't care
- Exponent field: All bits are 1
- Fraction field: At least one bit is 1

The NaN is a signaling NaN (sNaN) if the MSB of the fraction field is 1, and a quiet NaN (qNaN) if the MSB is 0.

**Figure 6.3** Single-Precision NaN Bit Pattern



N = 1: sNaN

N = 0: qNaN

An sNaN is input in an operation, except copy, FABS, and FNEG, that generates a floating-point value.

- When the EN.V bit in the FPSCR register is 0, the operation result (output) is a qNaN.
- When the EN.V bit in the FPSCR register is 1, an invalid operation exception will be generated. In this case, the contents of the operation destination register are unchanged.

If a qNaN is input in an operation that generates a floating-point value, and an sNaN has not been input in that operation, the output will always be a qNaN irrespective of the setting of the EN.V bit in the FPSCR register. An exception will not be generated in this case.

The qNaN values generated by the SH7091 as operation results are as follows:

- Single-precision qNaN: H'7FBFFFFF
- Double-precision qNaN: H'7FF7FFFF FFFFFFFF

See section 10, Instruction Descriptions, for details of floating-point operations when a non-number (NaN) is input.

### 6.2.3 Denormalized Numbers

For a denormalized number floating-point value, the exponent field is expressed as 0, and the fraction field as a non-zero value.

When the DN bit in the FPU's status register FPSCR is 1, a denormalized number (source operand or operation result) is always flushed to 0 in a floating-point operation that generates a value (an operation other than copy, FNEG, or FABS).

When the DN bit in FPSCR is 0, a denormalized number (source operand or operation result) is processed as it is. See the individual instruction descriptions for details of floating-point operations when a denormalized number is input.

## 6.3 Registers

### 6.3.1 Floating-Point Registers

Figure 4 shows the floating-point register configuration. There are thirty-two 32-bit floating-point registers, referenced by specifying FR0–FR15, DR0/2/4/6/8/10/12/14, FV0/4/8/12, XF0–XF15, XD0/2/4/6/8/10/12/14, or XMTRX.

- 1) Floating-point registers, FPRi\_BANKj (32 registers)  
FPR0\_BANK0–FPR15\_BANK0  
FPR0\_BANK1–FPR15\_BANK1
- 2) Single-precision floating-point registers, FRi (16 registers)  
When FPSCR.FR = 0, FR0–FR15 indicate FPR0\_BANK0–FPR15\_BANK0;  
when FPSCR.FR = 1, FR0–FR15 indicate FPR0\_BANK1–FPR15\_BANK1.
- 3) Double-precision floating-point registers, DRi (8 registers): A DR register comprises two FR registers  
DR0 = {FR0, FR1}, DR2 = {FR2, FR3}, DR4 = {FR4, FR5}, DR6 = {FR6, FR7},  
DR8 = {FR8, FR9}, DR10 = {FR10, FR11}, DR12 = {FR12, FR13}, DR14 = {FR14, FR15}



- 4) Single-precision floating-point vector registers, FVi (4 registers): An FV register comprises four FR registers  
FV0 = {FR0, FR1, FR2, FR3}, FV4 = {FR4, FR5, FR6, FR7},  
FV8 = {FR8, FR9, FR10, FR11}, FV12 = {FR12, FR13, FR14, FR15}
- 5) Single-precision floating-point extended registers, XFi (16 registers)  
When FPSCR.FR = 0, XF0–XF15 indicate FPR0\_BANK1–FPR15\_BANK1;  
when FPSCR.FR = 1, XF0–XF15 indicate FPR0\_BANK0–FPR15\_BANK0.
- 6) Double-precision floating-point extended registers, XD<sub>i</sub> (8 registers): An XD register comprises two XF registers  
XD0 = {XF0, XF1}, XD2 = {XF2, XF3}, XD4 = {XF4, XF5}, XD6 = {XF6, XF7},  
XD8 = {XF8, XF9}, XD10 = {XF10, XF11}, XD12 = {XF12, XF13}, XD14 = {XF14, XF15}
- 7) Single-precision floating-point extended register matrix, XMTRX: XMTRX comprises all 16 XF registers

<b>XMTRX</b>	XF0	XF4	XF8	XF12
	XF1	XF5	XF9	XF13
	XF2	XF6	XF10	XF14
	XF3	XF7	XF11	XF15

**Figure 6.4** Floating-Point Registers

FPSCR.FR = 0						FPSCR.FR = 1					
FV0	DR0	FR0	FPR0_BANK0			XF0	XD0	XMTRX			
		FR1	FPR1_BANK0			XF1					
	DR2	FR2	FPR2_BANK0			XF2	XD2				
FV4	DR4	FR3	FPR3_BANK0			XF3					
		FR4	FPR4_BANK0			XF4	XD4				
		FR5	FPR5_BANK0			XF5					
FV8	DR6	FR6	FPR6_BANK0			XF6	XD6				
		FR7	FPR7_BANK0			XF7					
	DR8	FR8	FPR8_BANK0			XF8	XD8				
FV12	DR10	FR9	FPR9_BANK0			XF9					
		FR10	FPR10_BANK0			XF10	XD10				
		FR11	FPR11_BANK0			XF11					
FV12	DR12	FR12	FPR12_BANK0			XF12	XD12				
		FR13	FPR13_BANK0			XF13					
	DR14	FR14	FPR14_BANK0			XF14	XD14				
		FR15	FPR15_BANK0			XF15					
XMTRX	XD0	XF0	FPR0_BANK1			FR0	DR0	FV0			
		XF1	FPR1_BANK1			FR1					
		XF2	FPR2_BANK1			FR2	DR2				
XD2		XF3	FPR3_BANK1			FR3					
		XF4	FPR4_BANK1			FR4	DR4	FV4			
		XF5	FPR5_BANK1			FR5					
XD6		XF6	FPR6_BANK1			FR6	DR6				
		XF7	FPR7_BANK1			FR7					
		XF8	FPR8_BANK1			FR8	DR8	FV8			
XD8		XF9	FPR9_BANK1			FR9					
		XF10	FPR10_BANK1			FR10	DR10				
		XF11	FPR11_BANK1			FR11					
XD12		XF12	FPR12_BANK1			FR12	DR12	FV12			
		XF13	FPR13_BANK1			FR13					
		XF14	FPR14_BANK1			FR14	DR14				
		XF15	FPR15_BANK1			FR15					

## 6.3.2 Floating-Point Status/Control Register (FPSCR)

- Floating-point status/control register, FPSCR (32 bits, initial value = H'0004 0001)

31	22	21	20	19	18	17	12	11	7	6	2	1	0
Reserved				FR	SZ	PR	DN	Cause		Enable	Flag		RM

- FR: Floating-point register bank

FR = 0: FPR0\_BANK0–FPR15\_BANK0 are assigned to FR0–FR15; FPR0\_BANK1–FPR15\_BANK1 are assigned to XF0–XF15.

FR = 1: FPR0\_BANK0–FPR15\_BANK0 are assigned to XF0–XF15; FPR0\_BANK1–FPR15\_BANK1 are assigned to FR0–FR15.

- SZ: Transfer size mode

SZ = 0: The data size of the FMOV instruction is 32 bits.

SZ = 1: The data size of the FMOV instruction is a 32-bit register pair (64 bits).

- PR: Precision mode

PR = 0: Floating-point instructions are executed as single-precision operations.

PR = 1: Floating-point instructions are executed as double-precision operations (graphics support instructions are undefined).

Do not set SZ and PR to 1 simultaneously; this setting is reserved.

[SZ, PR = 11]: Reserved (FPU operation instruction is undefined.)

- DN: Denormalization mode

DN = 0: A denormalized number is treated as such.

DN = 1: A denormalized number is treated as zero.

		FPU Error (E)	Invalid Operation (V)	Division by Zero (Z)	Overflow (O)	Underflow (U)	Inexact (I)
Cause	FPU exception cause field	Bit 17	Bit 16	Bit 15	Bit 14	Bit 13	Bit 12
Enable	FPU exception enable field	None	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7
Flag	FPU exception flag field	None	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2

When an FPU exception is requested, the corresponding bits in the cause and flag fields are set to 1. Each time an FPU operation instruction is executed, the cause field is cleared to 0 first. The flag field retains the value of 1 until cleared to 0 by software.

- RM: Rounding mode

RM = 00: Round to Nearest

RM = 01: Round to Zero

RM = 10: Reserved

RM = 11: Reserved

- Bits 22 to 31: Reserved

**Note:** The following functions have been added to the FPU of the SH7091 (not provided in the FPU of the SH7718):  
 The FR, SZ, and PR bits have been added.  
 Exception O (overflow), U (underflow), and I (inexact) bits have been added to the cause, enable, and flag fields.  
 An exception E (FPU error) bit has been added to the cause field.

### 6.3.3 Floating-Point Communication Register (FPUL)

Information is transferred between the FPU and CPU via the FPUL register. The 32-bit FPUL register is a system register, and is accessed from the CPU side by means of LDS and STS instructions. For example, to convert the integer stored in general register R1 to a single-precision floating-point number, the processing flow is as follows:

R1 → (LDS instruction) → FPUL → (single-precision FLOAT instruction) → FR1

## 6.4 Rounding

In a floating-point instruction, rounding is performed when generating the final operation result from the intermediate result. Therefore, the result of combination instructions such as FMAC, FTRV, and FIPR will differ from the result when using a basic instruction such as FADD, FSUB, or FMUL. Rounding is performed once in FMAC, but twice in FADD, FSUB, and FMUL.

There are two rounding methods, the method to be used being determined by the RM field in FPSCR.

- RM = 00: Round to Nearest
- RM = 01: Round to Zero

**Round to Nearest:** The value is rounded to the nearest expressible value. If there are two nearest expressible values, the one with an LSB of 0 is selected.

If the unrounded value is  $2^{E_{\max}}$  ( $2 - 2^{-P}$ ) or more, the result will be infinity with the same sign as the unrounded value. The values of  $E_{\max}$  and  $P$ , respectively, are 127 and 24 for single-precision, and 1023 and 53 for double-precision.

**Round to Zero:** The digits below the round bit of the unrounded value are discarded.

If the unrounded value is larger than the maximum expressible absolute value, the value will be the maximum expressible absolute value.

## 6.5 Floating-Point Exceptions

FPU-related exceptions are as follows:

- General illegal instruction/slot illegal instruction exception

The exception occurs if an FPU instruction is executed when SR.FD = 1.

- FPU exceptions

The exception sources are as follows:

- FPU error (E): When FPSCR.DN = 0 and a denormalized number is input
- Invalid operation (V): In case of an invalid operation, such as NaN input
- Division by zero (Z): Division with a zero divisor
- Overflow (O): When the operation result overflows
- Underflow (U): When the operation result underflows
- Inexact exception (I): When overflow, underflow, or rounding occurs

The FPSCR cause field contains bits corresponding to all of above sources E, V, Z, O, U, and I, and the FPSCR flag and enable fields contain bits corresponding to sources V, Z, O, U, and I, but not E. Thus, FPU errors cannot be disabled.

When an exception source occurs, the corresponding bit in the cause field is set to 1, and 1 is added to the corresponding bit in the flag field. When an exception source does not occur, the corresponding bit in the cause field is cleared to 0, but the corresponding bit in the flag field remains unchanged.

- Enable/disable exception handling

The SH7091 supports enable exception handling and disable exception handling.

Enable exception handling is initiated in the following cases:

- FPU error (E): FPSCR.DN = 0 and a denormalized number is input
- Invalid operation (V): FPSCR.EN.V = 1 and (instruction = FTRV or invalid operation)

- Division by zero (Z): FPSCR.EN.Z = 1 and division with a zero divisor
- Overflow (O): FPSCR.EN.O = 1 and instruction with possibility of operation result overflow
- Underflow (U): FPSCR.EN.U = 1 and instruction with possibility of operation result underflow
- Inexact exception (I): FPSCR.EN.I = 1 and instruction with possibility of inexact operation result

These possibilities are shown in the individual instruction descriptions. All exception events that originate in the FPU are assigned as the same exception event. The meaning of an exception is determined by software by reading system register FPSCR and interpreting the information it contains. If no bits are set in the cause field of FPSCR when one or more of bits O, U, I, and V (in case of FTRV only) are set in the enable field, this indicates that an actual exception source is not generated. Also, the destination register is not changed by any enable exception handling operation.

Except for the above, the FPU disables exception handling. In all processing, the bit corresponding to source V, Z, O, U, or I is set to 1, and disable exception handling is provided for each exception.

- Invalid operation (V): qNaN is generated as the result.
- Division by zero (Z): Infinity with the same sign as the unrounded value is generated.
- Overflow (O):

When rounding mode = RZ, the maximum normalized number, with the same sign as the unrounded value, is generated.

When rounding mode = RN, infinity with the same sign as the unrounded value is generated.

- Underflow (U):

When FPSCR.DN = 0, a denormalized number with the same sign as the unrounded value, or zero with the same sign as the unrounded value, is generated.

When FPSCR.DN = 1, zero with the same sign as the unrounded value, is generated.

- Inexact exception (I): An inexact result is generated.

## **6.6 Graphics Support Functions**

The SH7091 supports two kinds of graphics functions: new instructions for geometric operations, and pair single-precision transfer instructions that enable high-speed data transfer.

### **6.6.1 Geometric Operation Instructions**

Geometric operation instructions perform approximate-value computations. To enable high-speed computation with a minimum of hardware, the SH7091 ignores comparatively small values in the partial computation results of four multiplications. Consequently, the error shown below is produced in the result of the computation:

Maximum error = MAX (individual multiplication result  $\times$

$2^{-\text{MIN}(\text{number of multiplier significant digits}-1, \text{number of multiplicand significant digits}-1)}) + \text{MAX}(\text{result value} \times 2^{-23}, 2^{-149})$

The number of significant digits is 24 for a normalized number and 23 for a denormalized number (number of leading zeros in the fractional part).

**FIPR FV<sub>m</sub>, FV<sub>n</sub> (m, n: 0, 4, 8, 12):** This instruction is basically used for the following purposes:

- Inner product ( $m \pi n$ ):  
This operation is generally used for surface/rear surface determination for polygon surfaces.
- Sum of square of elements ( $m = n$ ):  
This operation is generally used to find the length of a vector.

Since approximate-value computations are performed to enable high-speed computation, the inexact exception (I) bit in the cause field and flag field is always set to 1 when an FIPR instruction is executed. Therefore, if the corresponding bit is set in the enable field, enable exception handling will be executed.

**FTRV XMTRX, FV<sub>n</sub> (n: 0, 4, 8, 12):** This instruction is basically used for the following purposes:

- Matrix ( $4 \times 4$ )  $\diamond$  vector (4):

This operation is generally used for viewpoint changes, angle changes, or movements called vector transformations (4-dimensional). Since affine transformation processing for angle + parallel movement basically requires a  $4 \times 4$  matrix, the SH7091 supports 4-dimensional operations.

- Matrix ( $4 \times 4$ )  $\times$  matrix ( $4 \times 4$ ):  
This operation requires the execution of four FTRV instructions.

Since approximate-value computations are performed to enable high-speed computation, the inexact exception (I) bit in the cause field and flag field is always set to 1 when an FTRV instruction is executed. Therefore, if the corresponding bit is set in the enable field, enable exception handling will be executed. For the same reason, it is not possible to check all data types in the registers beforehand when executing an FTRV instruction. If the V bit is set in the enable field, enable exception handling will be executed.

**FRCHG:** This instruction modifies banked registers. For example, when the FTRV instruction is executed, matrix elements must be set in an array in the background bank. However, to create the actual elements of a translation matrix, it is easier to use registers in the foreground bank. When the LDC instruction is used on FPSCR, this instruction expends 4 to 5 cycles in order to maintain the FPU state. With the FRCHG instruction, an FPSCR.FR bit modification can be performed in one cycle.

### 6.6.2 Pair Single-Precision Data Transfer

In addition to the powerful new geometric operation instructions, the SH7091 also supports high-speed data transfer instructions.

When FPSCR.SZ = 1, the SH7091 can perform data transfer by means of pair single-precision data transfer instructions.

- FMOV DR<sub>m</sub>/XD<sub>m</sub>, DR<sub>n</sub>/XDR<sub>n</sub> (m, n: 0, 2, 4, 6, 8, 10, 12, 14)
- FMOV DR<sub>m</sub>/XD<sub>m</sub>, @R<sub>n</sub> (m: 0, 2, 4, 6, 8, 10, 12, 14; n: 0 to 15)

These instructions enable two single-precision (2 x 32-bit) data items to be transferred; that is, the transfer performance of these instructions is doubled.

- FSCHG

This instruction changes the value of the SZ bit in FPSCR, enabling fast switching between use and non-use of pair single-precision data transfer.



# 7. Instruction Set

## 7.1 Execution Environment

**PC:** At the start of instruction execution, PC indicates the address of the instruction itself.

**Data sizes and data types:** The SH7091's instruction set is implemented with 16-bit fixed-length instructions. The SH7091 can use byte (8-bit), word (16-bit), longword (32-bit), and quadword (64-bit) data sizes for memory access. Single-precision floating-point data (32 bits) can be moved to and from memory using longword or quadword size. Double-precision floating-point data (64 bits) can be moved to and from memory using longword size. When a double-precision floating-point operation is specified (FPSCR.PR = 1), the result of an operation using quadword access will be undefined. When the SH7091 moves byte-size or word-size data from memory to a register, the data is sign-extended.

**Load-Store Architecture:** The SH7091 features a load-store architecture in which operations are basically executed using registers. Except for bit-manipulation operations such as logical AND that are executed directly in memory, operands in an operation that requires memory access are loaded into registers and the operation is executed between the registers.

**Delayed Branches:** Except for the two branch instructions BF and BT, the SH7091's branch instructions and RTE are delayed branches. In a delayed branch, the instruction following the branch is executed before the branch destination instruction. This execution slot following a delayed branch is called a delay slot. For example, the BRA execution sequence is as follows:

Static Sequence		Dynamic Sequence	
BRA	TARGET	BRA      TARGET	
ADD next_2	R1, R0	ADD      R1, R0 target_instr	• ADD in delay slot is executed before branching to TARGET

**Delay Slot:** An illegal instruction exception may occur when a specific instruction is executed in a delay slot. See section 5, Exceptions. The instruction following BF/S or BT/S for which the branch is not taken is also a delay slot instruction.

**T Bit:** The T bit in the status register (SR) is used to show the result of a compare operation, and is referenced by a conditional branch instruction. An example of the use of a conditional branch instruction is shown below.

ADD #1, R0 ; T bit is not changed by ADD operation

CMP/EQ R1, R0 ; If R0 = R1, T bit is set to 1

BT TARGET ; Branches to TARGET if T bit = 1 (R0 = R1)

In an RTE delay slot, status register (SR) bits are referenced as follows. In instruction access, the MD bit is used before modification, and in data access, the MD bit is accessed after modification. The other bits—S, T, M, Q, FD, BL, and RB—after modification are used for delay slot instruction execution. The STC and STC.L SR instructions access all SR bits after modification.

**Constant Values:** An 8-bit constant value can be specified by the instruction code and an immediate value. 16-bit and 32-bit constant values can be defined as literal constant values in memory, and can be referenced by a PC-relative load instruction.

MOV.W @(disp, PC), Rn



MOV.L @(disp, PC), Rn

There are no PC-relative load instructions for floating-point operations. However, it is possible to set 0.0 or 1.0 by using the FLDI0 or FLDI1 instruction on a single-precision floating-point register.





## 7.2 Addressing Modes




Addressing modes and effective address calculation methods are shown in table 7.1. When a location in virtual memory space is accessed (MMUCR.AT = 1), the effective address is translated into a physical memory address. If multiple virtual memory space systems are selected (MMUCR.SV = 0), the least significant bit of PTEH is also referenced as the access ASID. See section 3, Memory Management Unit (MMU).

**Table 7.1 Addressing Modes and Effective Addresses**

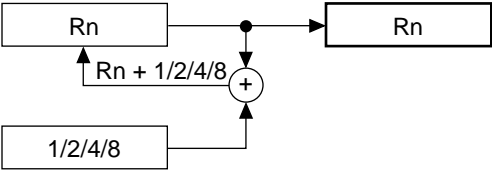Addressing Mode	Instruction Format	Effective Address Calculation Method	Calculation Formula
Register direct	Rn	Effective address is register Rn.(Operand is register Rn contents.)	—
Register indirect	@Rn	Effective address is register Rn contents. 	Rn → EA (EA: effective address)
Register indirect with post-increment	@Rn+	Effective address is register Rn contents. A constant is added to Rn after instruction execution: 1 for a byte operand, 2 for a word operand, 4 for a longword operand, 8 for a quadword operand. 	Rn → EA after instruction execution Byte: Rn + 1 → Rn Word: Rn + 2 → Rn Longword: Rn + 4 → Rn Quadword: Rn + 8 → Rn

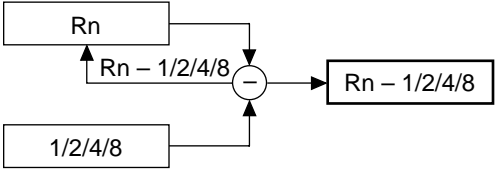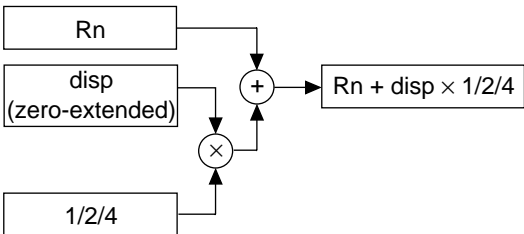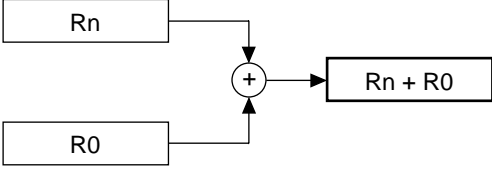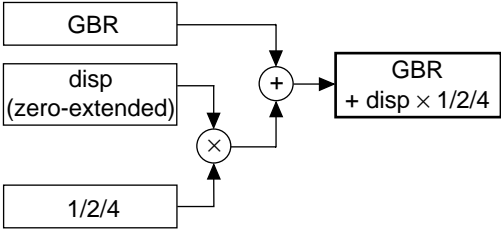

Addressing Mode	Instruction Format	Effective Address Calculation Method	Calculation Formula
Register indirect with pre-decrement	@-Rn	<p>Effective address is register Rn contents, decremented by a constant beforehand: 1 for a byte operand, 2 for a word operand, 4 for a longword operand, 8 for a quadword operand.</p> 	<p>Byte: <math>Rn - 1 \rightarrow Rn</math>  Word: <math>Rn - 2 \rightarrow Rn</math>  Longword: <math>Rn - 4 \rightarrow Rn</math>  Quadword: <math>Rn - 8 \rightarrow Rn</math>  <math>Rn \rightarrow EA</math> (Instruction executed with Rn after calculation)</p>
Register indirect with displacement	@(disp:4, Rn)	<p>Effective address is register Rn contents with 4-bit displacement disp added. After disp is zero-extended, it is multiplied by 1 (byte), 2 (word), or 4 (longword), according to the operand size.</p> 	<p>Byte: <math>Rn + disp \rightarrow EA</math>  Word: <math>Rn + disp \times 2 \rightarrow EA</math>  Longword: <math>Rn + disp \times 4 \rightarrow EA</math></p>
Indexed register indirect	@(R0, Rn)	<p>Effective address is sum of register Rn and R0 contents.</p> 	<p><math>Rn + R0 \rightarrow EA</math></p>
GBR indirect with displacement	@(disp:8, GBR)	<p>Effective address is register GBR contents with 8-bit displacement disp added. After disp is zero-extended, it is multiplied by 1 (byte), 2 (word), or 4 (longword), according to the operand size.</p> 	<p>Byte: <math>GBR + disp \rightarrow EA</math>  Word: <math>GBR + disp \times 2 \rightarrow EA</math>  Longword: <math>GBR + disp \times 4 \rightarrow EA</math>  Indexed GBR indirect</p>

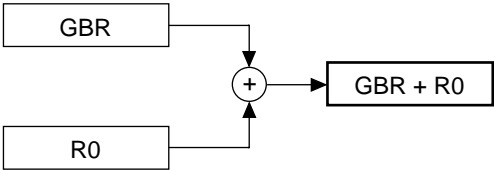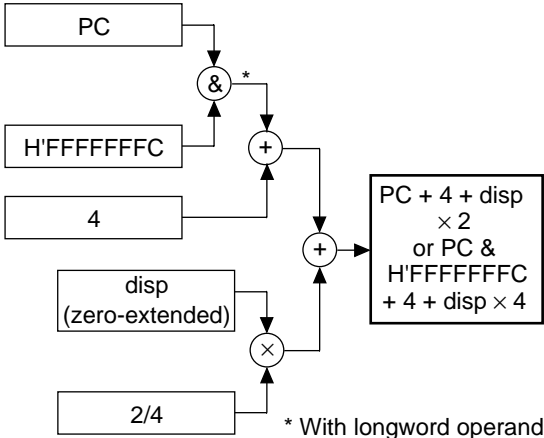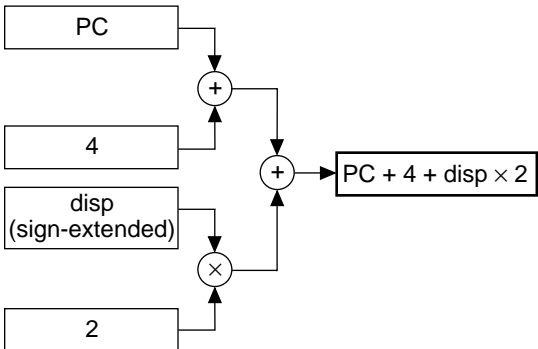	@(R0, GBR)	<p>Effective address is sum of register GBR and R0 contents.</p> 	GBR + R0 → EA
PC-relative with displacement	@(disp:8, PC)	<p>Effective address is PC+4 with 8-bit displacement disp added. After disp is zero-extended, it is multiplied by 2 (word), or 4 (longword), according to the operand size. With a longword operand, the lower 2 bits of PC are masked.</p> 	<p>Word: PC + 4 + disp × 2 → EA  Longword: PC &amp; H'FFFFFFFC + 4 + disp × 4 → EA</p>
PC-relative	disp:8	<p>Effective address is PC+4 with 8-bit displacement disp added after being sign-extended and multiplied by 2.</p> 	PC + 4 + disp × 2 → Branch-Target

PC-relative	disp:12	<p>Effective address is PC+4 with 12-bit displacement disp added after being sign-extended and multiplied by 2.</p>	PC + 4 + disp x 2 → Branch-Target
	Rn	<p>Effective address is sum of PC+4 and Rn.</p>	PC + 4 + Rn → Branch-Target
Immediate	#imm:8	8-bit immediate data imm of TST, AND, OR, or XOR instruction is zero-extended.	—
	#imm:8	8-bit immediate data imm of MOV, ADD, or CMP/EQ instruction is sign-extended.	—
	#imm:8	8-bit immediate data imm of TRAPA instruction is zero-extended and multiplied by 4.	—

**Note:** For the addressing modes below that use a displacement (disp), the assembler descriptions in this manual show the value before scaling (x1, x2, or x4) is performed according to the operand size. This is done to clarify the operation of the chip. Refer to the relevant assembler notation rules for the actual assembler descriptions.

@ (disp:4, Rn) ; Register indirect with displacement  
 @ (disp:8, GBR) ; GBR indirect with displacement  
 @ (disp:8, PC) ; PC-relative with displacement  
 disp:8, disp:12 ; PC-relative

## 7.3 Instruction Set

Table 7.2 shows the notation used in the following SH instruction list.

**Table 7.2** *Notation Used in Instruction List*

Item	Format	Description	
Instruction mnemonic	OP.Sz SRC, DEST	OP: Sz: SRC: DEST:	Operation code Size Source Source and/or destination operand
Summary of operation		‡, fl (xx) M/Q/T &   ^ ~ <<n, >>n	Transfer direction Memory operand SR flag bits Logical AND of individual bits Logical OR of individual bits Logical exclusive-OR of individual bits Logical NOT of individual bits n-bit shift
Instruction code	MSB ↔ LSB	mmmm: nnnn: 0000: 0001: : 1111: mmm: nnn: 000: 001: : 111: mm: nn: 00: 01: 10: 11: iiii: dddd:	Register number (Rm, FRm) Register number (Rn, FRn) R0, FR0 R1, FR1  R15, FR15 Register number (DRm, XDm, Rm_BANK) Register number (DRm, XDm, Rn_BANK) DR0, XD0, R0_BANK DR2, XD2, R1_BANK  DR14, XD14, R7_BANK Register number (FVm) Register number (FVn) FV0 FV4 FV8 FV12 Immediate data Displacement
Privileged mode		“Privileged” means the instruction can only be executed in privileged mode.	
T bit	Value of T bit after instruction execution	—:	No change

**Note:** Scaling (x1, x2, x4, or x8) is executed according to the size of the instruction operand(s).

**Table 7.3 Fixed-Point Transfer Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
MOV	#imm,Rn	imm → sign extension → Rn	1110nnnniiiiiii	—	—
MOV.W	@(disp,PC),Rn	(disp x 2 + PC + 4) → sign extension → Rn	1001nnnnddddddd	—	—
MOV.L	@(disp,PC),Rn	(disp x 4 + PC & H'FFFFFFC + 4) → Rn	1101nnnnddddddd	—	—
MOV	Rm,Rn	Rm → Rn	0110nnnnmmmm0011	—	—
MOV.B	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0000	—	—
MOV.W	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0001	—	—
MOV.L	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0010	—	—
MOV.B	@Rm,Rn	(Rm) → sign extension → Rn	0110nnnnmmmm0000	—	—
MOV.W	@Rm,Rn	(Rm) → sign extension → Rn	0110nnnnmmmm0001	—	—
MOV.L	@Rm,Rn	(Rm) → Rn	0110nnnnmmmm0010	—	—
MOV.B	Rm,@-Rn	Rn-1 → Rn, Rm → (Rn)	0010nnnnmmmm0100	—	—
MOV.W	Rm,@-Rn	Rn-2 → Rn, Rm → (Rn)	0010nnnnmmmm0101	—	—
MOV.L	Rm,@-Rn	Rn-4 → Rn, Rm → (Rn)	0010nnnnmmmm0110	—	—
MOV.B	@Rm+,Rn	(Rm) → sign extension → Rn, Rm + 1 → Rm	0110nnnnmmmm0100	—	—
MOV.W	@Rm+,Rn	(Rm) → sign extension → Rn, Rm + 2 → Rm	0110nnnnmmmm0101	—	—
MOV.L	@Rm+,Rn	(Rm) → Rn, Rm + 4 → Rm	0110nnnnmmmm0110	—	—
MOV.B	R0,@(disp,Rn)	R0 → (disp + Rn)	10000000nnnndddd	—	—
MOV.W	R0,@(disp,Rn)	R0 → (disp x 2 + Rn)	10000001nnnndddd	—	—
MOV.L	Rm,@(disp,Rn)	Rm → (disp x 4 + Rn)	0001nnnnmmmmdddd	—	—
MOV.B	@(disp,Rm),R0	(disp + Rm) → sign extension → R0	10000100mmmmdddd	—	—
MOV.W	@(disp,Rm),R0	(disp x 2 + Rm) → sign extension → R0	10000101mmmmdddd	—	—
MOV.L	@(disp,Rm),Rn	(disp x 4 + Rm) → Rn	0101nnnnmmmmdddd	—	—
MOV.B	Rm,@(R0,Rn)	Rm → (R0 + Rn)	0000nnnnmmmm0100	—	—
MOV.W	Rm,@(R0,Rn)	Rm → (R0 + Rn)	0000nnnnmmmm0101	—	—
MOV.L	Rm,@(R0,Rn)	Rm → (R0 + Rn)	0000nnnnmmmm0110	—	—
MOV.B	@(R0,Rm),Rn	(R0 + Rm) → sign extension → Rn	0000nnnnmmmm1100	—	—
MOV.W	@(R0,Rm),Rn	(R0 + Rm) → sign extension → Rn	0000nnnnmmmm1101	—	—

Instruction		Operation	Instruction Code	Privileged	T Bit
MOV.L	@(R0,Rm),Rn	(R0 + Rm) → Rn	0000nnnnmmmm1110	—	—
MOV.B	R0,@(disp,GBR)	R0 → (disp + GBR)	11000000ddddddd	—	—
MOV.W	R0,@(disp,GBR)	R0 → (disp x 2 + GBR)	11000001ddddddd	—	—
MOV.L	R0,@(disp,GBR)	R0 → (disp x 4 + GBR)	11000010ddddddd	—	—
MOV.B	@(disp,GBR),R0	(disp + GBR) → sign extension → R0	11000100ddddddd	—	—
MOV.W	@(disp,GBR),R0	(disp x 2 + GBR) → sign extension → R0	11000101ddddddd	—	—
MOV.L	@(disp,GBR),R0	(disp x 4 + GBR) → R0	11000110ddddddd	—	—
MOVA	@(disp,PC),R0	disp x 4 + PC & H'FFFFFFC + 4 → R0	11000111ddddddd	—	—
MOVT	Rn	T → Rn	0000nnnn00101001	—	—
SWAP.B	Rm,Rn	Rm → swap lower 2 bytes → REG	0110nnnnmmmm1000	—	—
SWAP.W	Rm,Rn	Rm → swap upper/lower words → Rn	0110nnnnmmmm1001	—	—
XTRCT	Rm,Rn	Rm:Rn middle 32 bits → Rn	0010nnnnmmmm1101	—	—

**Table 7.4 Arithmetic Operation Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
ADD	Rm,Rn	$Rn + Rm \rightarrow Rn$	0011nnnnmmmm1100	—	—
ADD	#imm,Rn	$Rn + imm \rightarrow Rn$	0111nnnniiiiiii	—	—
ADDC	Rm,Rn	$Rn + Rm + T \rightarrow Rn$ , carry $\rightarrow T$	0011nnnnmmmm1110	—	Carry
ADDV	Rm,Rn	$Rn + Rm \rightarrow Rn$ , overflow $\rightarrow T$	0011nnnnmmmm1111	—	Overflow
CMP/EQ	#imm,R0	When $R0 = imm$ , $1 \rightarrow T$ otherwise, $0 \rightarrow T$	10001000iiiiiii	—	Comparison result
CMP/EQ	Rm,Rn	When $Rn = Rm$ , $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0011nnnnmmmm0000	—	Comparison result
CMP/HS	Rm,Rn	When $Rn \geq Rm$ (unsigned), $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0011nnnnmmmm0010	—	Comparison result
CMP/GE	Rm,Rn	When $Rn \geq Rm$ (signed), $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0011nnnnmmmm0011	—	Comparison result
CMP/HI	Rm,Rn	When $Rn > Rm$ (unsigned), $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0011nnnnmmmm0110	—	Comparison result
CMP/GT	Rm,Rn	When $Rn > Rm$ (signed), $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0011nnnnmmmm0111	—	Comparison result
CMP/PZ	Rn	When $Rn \geq 0$ , $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0100nnnn00010001	—	Comparison result
CMP/PL	Rn	When $Rn > 0$ , $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0100nnnn00010101	—	Comparison result
CMP/STR	Rm,Rn	When any bytes are equal, $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0010nnnnmmmm1100	—	Comparison result
DIV1	Rm,Rn	1-step division ( $Rn \div Rm$ )	0011nnnnmmmm0100	—	Calculation result
DIV0S	Rm,Rn	MSB of $Rn \rightarrow Q$ , MSB of $Rm \rightarrow M$ , $M \wedge Q \rightarrow T$	0010nnnnmmmm0111	—	Calculation result
DIV0U		$0 \rightarrow M/Q/T$	0000000000011001	—	0
DMULS.L	Rm,Rn	Signed, $Rn \times Rm \rightarrow MAC$ , $32 \times 32 \rightarrow 64$ bits	0011nnnnmmmm1101	—	—
DMULU.L	Rm,Rn	Unsigned, $Rn \times Rm \rightarrow MAC$ , $32 \times 32 \rightarrow 64$ bits	0011nnnnmmmm0101	—	—
DT	Rn	$Rn - 1 \rightarrow Rn$ ; when $Rn = 0$ , $1 \rightarrow T$ When $Rn \neq 0$ , $0 \rightarrow T$	0100nnnn00010000	—	Comparison result
EXTS.B	Rm,Rn	$Rm$ sign-extended from byte $\rightarrow Rn$	0110nnnnmmmm1110	—	—
EXTS.W	Rm,Rn	$Rm$ sign-extended from word $\rightarrow Rn$	0110nnnnmmmm1111	—	—

Instruction		Operation	Instruction Code	Privileged	T Bit
EXTU.B	Rm,Rn	Rm zero-extended from byte $\rightarrow$ Rn	0110nnnnmmmm1100	—	—
EXTU.W	Rm,Rn	Rm zero-extended from word $\rightarrow$ Rn	0110nnnnmmmm1101	—	—
MAC.L	@Rm+,@Rn+	Signed, $(Rn) \times (Rm) + MAC \rightarrow MACRn + 4 \rightarrow Rn$ , $Rm + 4 \rightarrow Rm$ 32 x 32 + 64 $\rightarrow$ 64 bits	0000nnnnmmmm1111	—	—
MAC.W	@Rm+,@Rn+	Signed, $(Rn) \times (Rm) + MAC \rightarrow MACRn + 2 \rightarrow Rn$ , $Rm + 2 \rightarrow Rm$ 16 x 16 + 64 $\rightarrow$ 64 bits	0100nnnnmmmm1111	—	—
MUL.L	Rm,Rn	$Rn \times Rm \rightarrow MACL$ 32 x 32 $\rightarrow$ 32 bits	0000nnnnmmmm0111	—	—
MULS.W	Rm,Rn	Signed, $Rn \times Rm \rightarrow MACL$ 16 x 16 $\rightarrow$ 32 bits	0010nnnnmmmm1111	—	—
MULU.W	Rm,Rn	Unsigned, $Rn \times Rm \rightarrow MACL$ 16 x 16 $\rightarrow$ 32 bits	0010nnnnmmmm1110	—	—
NEG	Rm,Rn	$0 - Rm \rightarrow Rn$	0110nnnnmmmm1011	—	—
NEGC	Rm,Rn	$0 - Rm - T \rightarrow Rn$ , borrow $\rightarrow T$	0110nnnnmmmm1010	—	Borrow
SUB	Rm,Rn	$Rn - Rm \rightarrow Rn$	0011nnnnmmmm1000	—	—
SUBC	Rm,Rn	$Rn - Rm - T \rightarrow Rn$ , borrow $\rightarrow T$	0011nnnnmmmm1010	—	Borrow
SUBV	Rm,Rn	$Rn - Rm \rightarrow Rn$ , underflow $\rightarrow T$	0011nnnnmmmm1011	—	Underflow



**Table 7.5 Logic Operation Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
AND	Rm,Rn	$Rn \& Rm \rightarrow Rn$	0010nnnnmmmm1001	—	—
AND	#imm,R0	$R0 \& imm \rightarrow R0$	11001001iiiiiii	—	—
AND.B	#imm,@(R0,GBR)	$(R0 + GBR) \& imm \rightarrow (R0 + GBR)$	11001101iiiiiii	—	—
NOT	Rm,Rn	$\sim Rm \rightarrow Rn$	0110nnnnmmmm0111	—	—
OR	Rm,Rn	$Rn   Rm \rightarrow Rn$	0010nnnnmmmm1011	—	—
OR	#imm,R0	$R0   imm \rightarrow R0$	11001011iiiiiii	—	—
OR.B	#imm,@(R0,GBR)	$(R0 + GBR)   imm \rightarrow (R0 + GBR)$	11001111iiiiiii	—	—
TAS.B	@Rn	When (Rn) = 0, $1 \rightarrow T$ otherwise, $0 \rightarrow T$ In both cases, $1 \rightarrow$ MSB of (Rn)	0100nnnn00011011	—	Test result
TST	Rm,Rn	$Rn \& Rm$ ; when result = 0, $1 \rightarrow T$ otherwise, $0 \rightarrow T$	0010nnnnmmmm1000	—	Test result
TST	#imm,R0	$R0 \& imm$ ; when result = 0, $1 \rightarrow T$ otherwise, $0 \rightarrow T$	11001000iiiiiii	—	Test result
TST.B	#imm,@(R0,GBR)	$(R0 + GBR) \& imm$ ; when result = 0, $1 \rightarrow T$ otherwise, $0 \rightarrow T$	11001100iiiiiii	—	Test result
XOR	Rm,Rn	$Rn \times Rm \rightarrow Rn$	0010nnnnmmmm1010	—	—
XOR	#imm,R0	$R0 \times imm \rightarrow R0$	11001010iiiiiii	—	—
XOR.B	#imm,@(R0,GBR)	$(R0 + GBR) \times imm \rightarrow (R0 + GBR)$	11001110iiiiiii	—	—

**Table 7.6 Shift Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
ROTL	Rn	$T \leftarrow Rn \leftarrow \text{MSB}$	0100nnnn00000100	—	MSB
ROTR	Rn	$\text{LSB} \rightarrow Rn \rightarrow T$	0100nnnn00000101	—	LSB
ROTCL	Rn	$T \leftarrow Rn \leftarrow T$	0100nnnn00100100	—	MSB
ROTCR	Rn	$T \rightarrow Rn \rightarrow T$	0100nnnn00100101	—	LSB
SHAD	Rm,Rn	When $Rn \geq 0$ , $Rn \ll Rm \rightarrow Rn$ When $Rn < 0$ , $Rn \gg Rm \rightarrow [\text{MSB} \rightarrow Rn]$	0100nnnnmmmm1100	—	—
SHAL	Rn	$T \leftarrow Rn \leftarrow 0$	0100nnnn00100000	—	MSB
SHAR	Rn	$\text{MSB} \rightarrow Rn \rightarrow T$	0100nnnn00100001	—	LSB
SHLD	Rm,Rn	When $Rn \geq 0$ , $Rn \ll Rm \rightarrow Rn$ When $Rn < 0$ , $Rn \gg Rm \rightarrow [0 \rightarrow Rn]$	0100nnnnmmmm1101	—	—
SHLL	Rn	$T \leftarrow Rn \leftarrow 0$	0100nnnn00000000	—	MSB
SHLR	Rn	$0 \rightarrow Rn \rightarrow T$	0100nnnn00000001	—	LSB
SHLL2	Rn	$Rn \ll 2 \rightarrow Rn$	0100nnnn00001000	—	—
SHLR2	Rn	$Rn \gg 2 \rightarrow Rn$	0100nnnn00001001	—	—
SHLL8	Rn	$Rn \ll 8 \rightarrow Rn$	0100nnnn00011000	—	—
SHLR8	Rn	$Rn \gg 8 \rightarrow Rn$	0100nnnn00011001	—	—
SHLL16	Rn	$Rn \ll 16 \rightarrow Rn$	0100nnnn00101000	—	—
SHLR16	Rn	$Rn \gg 16 \rightarrow Rn$	0100nnnn00101001	—	—

Table 7.7 Branch Instructions

Instruction		Operation	Instruction Code	Privileged	T Bit
BF	label	When $T = 0$ , $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$ When $T = 1$ , nop	10001011dddddddd	—	—
BF/S	label	Delayed branch; when $T = 0$ , $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$ When $T = 1$ , nop	10001111dddddddd	—	—
BT	label	When $T = 1$ , $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$ When $T = 0$ , nop	10001001dddddddd	—	—
BT/S	label	Delayed branch; when $T = 1$ , $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$ When $T = 0$ , nop	10001101dddddddd	—	—
BRA	label	Delayed branch, $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$	1010dddddddddddd	—	—
BRAF	Rn	$\text{Rn} + \text{PC} + 4 \rightarrow \text{PC}$	0000nnnn00100011	—	—
BSR	label	Delayed branch, $\text{PC} + 4 \rightarrow \text{PR}$ , $\text{disp} \times 2 + \text{PC} + 4 \rightarrow \text{PC}$	1011dddddddddddd	—	—
BSRF	Rn	Delayed branch, $\text{PC} + 4 \rightarrow \text{PR}$ , $\text{Rn} + \text{PC} + 4 \rightarrow \text{PC}$	0000nnnn00000011	—	—
JMP	@Rn	Delayed branch, $\text{Rn} \rightarrow \text{PC}$	0100nnnn00101011	—	—
JSR	@Rn	Delayed branch, $\text{PC} + 4 \rightarrow \text{PR}$ , $\text{Rn} \rightarrow \text{PC}$	0100nnnn00001011	—	—
RTS		Delayed branch, $\text{PR} \rightarrow \text{PC}$	0000000000001011	—	—

**Table 7.8 System Control Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
CLRMAC		$0 \rightarrow \text{MACH, MACL}$	000000000101000	—	—
CLRS		$0 \rightarrow \text{S}$	000000001001000	—	—
CLRT		$0 \rightarrow \text{T}$	000000000001000	—	0
LDC	Rm,SR	$\text{Rm} \rightarrow \text{SR}$	0100mmmm00001110	Privileged	LSB
LDC	Rm,GBR	$\text{Rm} \rightarrow \text{GBR}$	0100mmmm00011110	—	—
LDC	Rm,VBR	$\text{Rm} \rightarrow \text{VBR}$	0100mmmm00101110	Privileged	—
LDC	Rm,SSR	$\text{Rm} \rightarrow \text{SSR}$	0100mmmm00111110	Privileged	—
LDC	Rm,SPC	$\text{Rm} \rightarrow \text{SPC}$	0100mmmm01001110	Privileged	—
LDC	Rm,DBR	$\text{Rm} \rightarrow \text{DBR}$	0100mmmm11111010	Privileged	—
LDC	Rm,Rn_BANK	$\text{Rm} \rightarrow \text{Rn\_BANK}$ ( $n = 0$ to 7)	0100mmmm1nnn1110	Privileged	—
LDC.L	@Rm+,SR	$(\text{Rm}) \rightarrow \text{SR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00000111	Privileged	LSB
LDC.L	@Rm+,GBR	$(\text{Rm}) \rightarrow \text{GBR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00010111	—	—
LDC.L	@Rm+,VBR	$(\text{Rm}) \rightarrow \text{VBR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00100111	Privileged	—
LDC.L	@Rm+,SSR	$(\text{Rm}) \rightarrow \text{SSR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00110111	Privileged	—
LDC.L	@Rm+,SPC	$(\text{Rm}) \rightarrow \text{SPC}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm01000111	Privileged	—
LDC.L	@Rm+,DBR	$(\text{Rm}) \rightarrow \text{DBR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm11110110	Privileged	—
LDC.L	@Rm+,Rn_BANK	$(\text{Rm}) \rightarrow \text{Rn\_BANK}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm1nnn0111	Privileged	—
LDS	Rm,MACH	$\text{Rm} \rightarrow \text{MACH}$	0100mmmm00001010	—	—
LDS	Rm,MACL	$\text{Rm} \rightarrow \text{MACL}$	0100mmmm00011010	—	—
LDS	Rm,PR	$\text{Rm} \rightarrow \text{PR}$	0100mmmm00101010	—	—
LDS.L	@Rm+,MACH	$(\text{Rm}) \rightarrow \text{MACH}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00000110	—	—
LDS.L	@Rm+,MACL	$(\text{Rm}) \rightarrow \text{MACL}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00010110	—	—
LDS.L	@Rm+,PR	$(\text{Rm}) \rightarrow \text{PR}, \text{Rm} + 4 \rightarrow \text{Rm}$	0100mmmm00100110	—	—
LDTLB		$\text{PTEH/PTEL} \rightarrow \text{TLB}$	000000000111000	Privileged	—
MOVCA.L	R0,@Rn	$\text{R0} \rightarrow (\text{Rn})$ (without fetching cache block)	0000nnnn11000011	—	—
NOP		No operation	000000000001001	—	—
OCBI	@Rn	Invalidates operand cache block	0000nnnn10010011	—	—

Instruction		Operation	Instruction Code	Privileged	T Bit
OCBP	@Rn	Writes back and invalidates operand cache block	0000nnnn10100011	—	—
OCBWB	@Rn	Writes back operand cache block	0000nnnn10110011	—	—
PREF	@Rn	(Rn) → operand cache	0000nnnn10000011	—	—
RTE		Delayed branch, SSR/SPC → SR/PC	000000000101011	Privileged	—
SETS		1 → S	0000000001011000	—	—
SETT		1 → T	0000000000011000	—	1
SLEEP		Sleep or standby	0000000000011011	Privileged	—
STC	SR,Rn	SR → Rn	0000nnnn00000010	Privileged	—
STC	GBR,Rn	GBR → Rn	0000nnnn00010010	—	—
STC	VBR,Rn	VBR → Rn	0000nnnn00100010	Privileged	—
STC	SSR,Rn	SSR → Rn	0000nnnn00110010	Privileged	—
STC	SPC,Rn	SPC → Rn	0000nnnn01000010	Privileged	—
STC	SGR,Rn	SGR → Rn	0000nnnn00111010	Privileged	—
STC	DBR,Rn	DBR → Rn	0000nnnn11111010	Privileged	—
STC	Rm_BANK,Rn	Rm_BANK → Rn (m = 0 to 7)	0000nnnn1mmm0010	Privileged	—
STC.L	SR,@-Rn	Rn – 4 → Rn, SR → (Rn)	0100nnnn00000011	Privileged	—
STC.L	GBR,@-Rn	Rn – 4 → Rn, GBR → (Rn)	0100nnnn00010011	—	—
STC.L	VBR,@-Rn	Rn – 4 → Rn, VBR → (Rn)	0100nnnn00100011	Privileged	—
STC.L	SSR,@-Rn	Rn – 4 → Rn, SSR → (Rn)	0100nnnn00110011	Privileged	—
STC.L	SPC,@-Rn	Rn – 4 → Rn, SPC → (Rn)	0100nnnn01000011	Privileged	—
STC.L	SGR,@-Rn	Rn – 4 → Rn, SGR → (Rn)	0100nnnn00110010	Privileged	—
STC.L	DBR,@-Rn	Rn – 4 → Rn, DBR → (Rn)	0100nnnn11110010	Privileged	—
STC.L	Rm_BANK,@-Rn	Rn – 4 → Rn, Rm_BANK → (Rn) (m = 0 to 7)	0100nnnn1mmm0011	Privileged	—
STS	MACH,Rn	MACH → Rn	0000nnnn00001010	—	—
STS	MACL,Rn	MACL → Rn	0000nnnn00011010	—	—
STS	PR,Rn	PR → Rn	0000nnnn00101010	—	—

Instruction		Operation	Instruction Code	Privileged	T Bit
STS.L	MACH,@-Rn	Rn - 4 → Rn, MACH → (Rn)	0100nnnn00000010	—	—
STS.L	MACL,@-Rn	Rn - 4 → Rn, MACL → (Rn)	0100nnnn00010010	—	—
STS.L	PR,@-Rn	Rn - 4 → Rn, PR → (Rn)	0100nnnn00100010	—	—
TRAPA	#imm	PC + 2 → SPC, SR → SSR, #imm << 2 → TRA, H'160 → EXPEVT, VBR + H'0100 → PC	11000011iiiiiii	—	—

**Table 7.9 Floating-Point Single-Precision Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
FLDI0	FRn	H'00000000 → FRn	1111nnnn10001101	—	—
FLDI1	FRn	H'3F800000 → FRn	1111nnnn10011101	—	—
FMOV	FRm,FRn	FRm → FRn	1111nnnnmmmm1100	—	—
FMOV.S	@Rm,FRn	(Rm) → FRn	1111nnnnmmmm1000	—	—
FMOV.S	@(R0,Rm),FRn	(R0 + Rm) → FRn	1111nnnnmmmm0110	—	—
FMOV.S	@Rm+,FRn	(Rm) → FRn, Rm + 4 → Rm	1111nnnnmmmm1001	—	—
FMOV.S	FRm,@Rn	FRm → (Rn)	1111nnnnmmmm1010	—	—
FMOV.S	FRm,@-Rn	Rn-4 → Rn, FRm → (Rn)	1111nnnnmmmm1011	—	—
FMOV.S	FRm,@(R0,Rn)	FRm → (R0 + Rn)	1111nnnnmmmm0111	—	—
FMOV	DRm,DRn	DRm → DRn	1111nnn0mmmm01100	—	—
FMOV	@Rm,DRn	(Rm) → DRn	1111nnn0mmmm1000	—	—
FMOV	@(R0,Rm),DRn	(R0 + Rm) → DRn	1111nnn0mmmm0110	—	—
FMOV	@Rm+,DRn	(Rm) → DRn, Rm + 8 → Rm	1111nnn0mmmm1001	—	—
FMOV	DRm,@Rn	DRm → (Rn)	1111nnnnmmmm01010	—	—
FMOV	DRm,@-Rn	Rn-8 → Rn, DRm → (Rn)	1111nnnnmmmm01011	—	—
FMOV	DRm,@(R0,Rn)	DRm → (R0 + Rn)	1111nnnnmmmm00111	—	—
FLDS	FRm,FPUL	FRm → FPUL	1111mmmm00011101	—	—
FSTS	FPUL,FRn	FPUL → FRn	1111nnnn00001101	—	—
FABS	FRn	FRn & H'7FFF FFFF → FRn	1111nnnn01011101	—	—
FADD	FRm,FRn	FRn + FRm → FRn	1111nnnnmmmm0000	—	—

Instruction		Operation	Instruction Code	Privileged	T Bit
FCMP/EQ	FRm,FRn	When $FRn = FRm$ , $1 \rightarrow T$ Otherwise, $0 \rightarrow T$	1111nnnnmmmm0100	—	Comparison result
FCMP/GT	FRm,FRn	When $FRn > FRm$ , $1 \rightarrow T$ Otherwise, $0 \rightarrow T$	1111nnnnmmmm0101	—	Comparison result
FDIV	FRm,FRn	$FRn/FRm \rightarrow FRn$	1111nnnnmmmm0011	—	—
FLOAT	FPUL,FRn	(float) FPUL $\rightarrow FRn$	1111nnnn00101101	—	—
FMAC	FR0,FRm,FRn	$FR0 * FRm + FRn \rightarrow FRn$	1111nnnnmmmm1110	—	—
FMUL	FRm,FRn	$FRn * FRm \rightarrow FRn$	1111nnnnmmmm0010	—	—
FNEG	FRn	$FRn \wedge H'80000000 \rightarrow FRn$	1111nnnn01001101	—	—
FSQRT	FRn	$FRn \rightarrow FRn$	1111nnnn01101101	—	—
FSUB	FRm,FRn	$\sqrt{FRn - FRm} \rightarrow FRn$	1111nnnnmmmm0001	—	—
FTRC	FRm,FPUL	(long) $FRm \rightarrow FPUL$	1111mmmm00111101	—	—

**Table 7.10 Floating-Point Double-Precision Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
FABS	DRn	$DRn \wedge H'7FFF\ FFFF\ FFFF\ FFFF \rightarrow DRn$	1111nnn001011101	—	—
FADD	DRm,DRn	$DRn + DRm \rightarrow DRn$	1111nnn0mmmm00000	—	—
FCMP/EQ	DRm,DRn	When $DRn = DRm$ , $1 \rightarrow T$ Otherwise, $0 \rightarrow T$	1111nnn0mmmm00100	—	Comparison result
FCMP/GT	DRm,DRn	When $DRn > DRm$ , $1 \rightarrow T$ Otherwise, $0 \rightarrow T$	1111nnn0mmmm00101	—	Comparison result
FDIV	DRm,DRn	$DRn / DRm \rightarrow DRn$	1111nnn0mmmm00011	—	—
FCNVDS	DRm,FPUL	double_to_float[DRm] $\rightarrow FPUL$	1111mmmm010111101	—	—
FCNVSD	FPUL,DRn	float_to_double [FPUL] $\rightarrow DRn$	1111nnnn010101101	—	—
FLOAT	FPUL,DRn	(float)FPUL $\rightarrow DRn$	1111nnnn000101101	—	—
FMUL	DRm,DRn	$DRn * DRm \rightarrow DRn$	1111nnnn0mmmm00010	—	—
FNEG	DRn	$DRn \wedge H'8000\ 0000\ 0000\ 0000 \rightarrow DRn$	1111nnnn001001101	—	—
FSQRT	DRn	$\sqrt{DRn} \rightarrow DRn$	1111nnnn001101101	—	—
FSUB	DRm,DRn	$DRn - DRm \rightarrow DRn$	1111nnnn0mmmm00001	—	—
FTRC	DRm,FPUL	(long) $DRm \rightarrow FPUL$	1111mmmm000111101	—	—

**Table 7.11 Floating-Point Control Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
LDS	Rm,FPSCR	Rm → FPSCR	0100mmmm01101010	—	—
LDS	Rm,FPUL	Rm → FPUL	0100mmmm01011010	—	—
LDS.L	@Rm+,FPSCR	(Rm) → FPSCR, Rm+4 → Rm	0100mmmm01100110	—	—
LDS.L	@Rm+,FPUL	(Rm) → FPUL, Rm+4 → Rm	0100mmmm01010110	—	—
STS	FPSCR,Rn	FPSCR → Rn	0000nnnn01101010	—	—
STS	FPUL,Rn	FPUL → Rn	0000nnnn01011010	—	—
STS.L	FPSCR,@-Rn	Rn − 4 → Rn, FPSCR → (Rn)	0100nnnn01100010	—	—
STS.L	FPUL,@-Rn	Rn − 4 → Rn, FPUL → (Rn)	0100nnnn01010010	—	—

**Table 7.12 Floating-Point Graphics Acceleration Instructions**

Instruction		Operation	Instruction Code	Privileged	T Bit
FMOV	DRm,XDn	DRm → XDn	1111nnn1mmm01100	—	—
FMOV	XDm,DRn	XDm → DRn	1111nnn0mmm11100	—	—
FMOV	XDm,XDn	XDm → XDn	1111nnn1mmm11100	—	—
FMOV	@Rm,XDn	(Rm) → XDn	1111nnn1mmmm1000	—	—
FMOV	@Rm+,XDn	(Rm) → XDn, Rm + 8 → Rm	1111nnn1mmmm1001	—	—
FMOV	@(R0,Rm),DRn	(R0 + Rm) → DRn	1111nnn1mmmm0110	—	—
FMOV	XDm,@Rn	XDm → (Rn)	1111nnnnmmmm11010	—	—
FMOV	XDm,@-Rn	Rn − 8 → Rn, XDm → (Rn)	1111nnnnmmmm11011	—	—
FMOV	XDm,@(R0,Rn)	XDm → (R0+Rn)	1111nnnnmmmm10111	—	—
FIPR	FVm,FVn	inner_product [FVm, FVn] → FR[n+3]	1111nnmm11101101	—	—
FTRV	XMTRX,FVn	transform_vector [XMTRX, FVn] → FVn	1111nn0111111101	—	—
FRCHG		~FPSCR.FR → SPFCR.FR	1111101111111101	—	—
FSCHG		~FPSCR.SZ → SPFCR.SZ	1111001111111101	—	—





## ***8. Pipelining***

---

The SH7091 is a 2-ILP (instruction-level-parallelism) superscalar pipelining microprocessor. Instruction execution is pipelined, and two instructions can be executed in parallel. The execution cycles depend on the implementation of a processor. Definitions in this section may not be applicable to SH-4 Series models other than the SH7091.

### **8.1 Pipelines**

Figure 8.1 shows the basic pipelines. Normally, a pipeline consists of five or six stages: instruction fetch (I), decode and register read (D), execution (EX/SX/F0/F1/F2/F3), data access (NA/MA), and write-back (S/FS). An instruction is executed as a combination of basic pipelines. Figure 8.2 shows the instruction execution patterns.

## 1. General Pipeline

I	D	EX	NA	S
• Instruction fetch	• Instruction decode • Issue • Register read • Destination address calculation for PC-relative branch	• Operation	• Non-memory data access	• Write-back

## 2. General Load/Store Pipeline

I	D	EX	MA	S
• Instruction fetch	• Instruction decode • Issue • Register read	• Address calculation	• Memory data access	• Write-back

## 3. Special Pipeline

I	D	SX	NA	S
• Instruction fetch	• Instruction decode • Issue • Register read	• Operation	• Non-memory data access	• Write-back

## 4. Special Load/Store Pipeline

I	D	SX	MA	S
• Instruction fetch	• Instruction decode • Issue • Register read	• Address calculation	• Memory data access	• Write-back

## 5. Floating-Point Pipeline

I	D	F1	F2	FS
• Instruction fetch	• Instruction decode • Issue • Register read	• Computation 1	• Computation 2	• Computation 3 • Write-back

## 6. Floating-Point Extended Pipeline

I	D	F0	F1	F2	FS
• Instruction fetch	• Instruction decode • Issue • Register read	• Computation 0	• Computation 1	• Computation 2	• Computation 3 • Write-back

## 7. FDIV/FSQRT Pipeline

F3
----

Computation: Takes several cycles

**Figure 8.1** Basic Pipelines

- 1-step operation: 1 issue cycle

EXT[SU].[BW], MOV, MOV#, MOVA, MOVT, SWAP.[BW], XTRCT, ADD\*, CMP\*, DIV\*, DT, NEG\*, SUB\*, AND, AND#, NOT, OR, OR#, TST, TST#, XOR, XOR#, ROT\*, SHA\*, SHL\*, BF\*, BT\*, BRA, NOP, CLRS, CLRT, SETS, SETT, LDS to FPUL, STS from FPUL/FPSCR, FLDI0, FLDI1, FMOV, FLDS, FSTS, single-/double-precision FABS/FNEG

I	D	EX	NA	S
---	---	----	----	---

2. Load/store: 1 issue cycle

MOV.[BWL]. FMOV\*@, LDS.L to FPUL, LDTLB, PREF, STS.L from FPUL/FPSCR

I	D	EX	MA	S
---	---	----	----	---

3. GBR-based load/store: 1 issue cycle

MOV.[BWL]@(d,GBR)

I	D	SX	MA	S
---	---	----	----	---

4. JMP, RTS, BRAF: 2 issue cycles

I	D	EX	NA	S	
		D	EX	NA	S

5. TST.B: 3 issue cycles

I	D	SX	MA	S		
		D	SX	NA	S	
			D	SX	NA	S

6. AND.B, OR.B, XOR.B: 4 issue cycles

I	D	SX	MA	S			
		D	SX	NA	S		
			D	SX	NA	S	
				D	SX	MA	S

7. TAS.B: 5 issue cycles

I	D	EX	MA	S					
		D	EX	MA	S				
			D	EX	NA	S			
				D	EX	NA	S		
					D	EX	MA	S	

8. RTE: 5 issue cycles

I	D	EX	NA	S					
		D	EX	NA	S				
			D	EX	NA	S			
				D	EX	NA	S		
					D	EX	NA	S	
						D	EX	NA	S

9. SLEEP: 4 issue cycles

I	D	EX	NA	S				
		D	EX	NA	S			
			D	EX	NA	S		
				D	EX	NA	S	

**Figure 8.2** Instruction Execution Patterns

- |   |   |    |    |    |
|---|---|----|----|----|
| I | D | EX | MA | S  |
|   |   |    |    | MA |

- 
- A diagram of a staircase with five steps, each labeled with a letter: I, D, EX, MA, S. The steps descend from left to right.

- 
- The diagram shows a staircase with 6 steps, each labeled MA. The staircase starts from a box containing the sequence I, D, EX, MA, S. The steps descend from the box to the right.

- |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| I | D | EX | NA | S  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|   |   | D  | EX | NA | S  |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|   |   |    | D  | EX | NA | S  |    |    |    |    |    |    |    |    |    |    |    |    |   |
|   |   |    |    | D  | EX | NA | S  |    |    |    |    |    |    |    |    |    |    |    |   |
|   |   |    |    |    | D  | EX | NA | S  |    |    |    |    |    |    |    |    |    |    |   |
|   |   |    |    |    |    | D  | EX | NA | S  |    |    |    |    |    |    |    |    |    |   |
|   |   |    |    |    |    |    | D  | EX | NA | S  |    |    |    |    |    |    |    |    |   |
|   |   |    |    |    |    |    |    | D  | EX | NA | S  |    |    |    |    |    |    |    |   |
|   |   |    |    |    |    |    |    |    | D  | EX | NA | S  |    |    |    |    |    |    |   |
|   |   |    |    |    |    |    |    |    |    | D  | EX | NA | S  |    |    |    |    |    |   |
|   |   |    |    |    |    |    |    |    |    |    | D  | EX | NA | S  |    |    |    |    |   |
|   |   |    |    |    |    |    |    |    |    |    |    | D  | EX | NA | S  |    |    |    |   |
|   |   |    |    |    |    |    |    |    |    |    |    |    | D  | EX | NA | S  |    |    |   |
|   |   |    |    |    |    |    |    |    |    |    |    |    |    | D  | EX | NA | S  |    |   |
|   |   |    |    |    |    |    |    |    |    |    |    |    |    |    | D  | EX | NA | S  |   |
|   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    | D  | EX | NA | S |

- |   |   |    |    |    |
|---|---|----|----|----|
| I | D | EX | NA | S  |
|   |   |    | SX |    |
|   |   |    |    | SX |

- |   |   |    |    |    |
|---|---|----|----|----|
| I | D | EX | NA | S  |
|   |   | D  | SX |    |
|   |   |    | D  | SX |


- |   |   |    |    |    |    |
|---|---|----|----|----|----|
| I | D | EX | NA | S  |    |
|   |   | D  | SX |    |    |
|   |   |    | D  | SX |    |
|   |   |    |    | D  | SX |

- |   |   |    |    |    |
|---|---|----|----|----|
| I | D | EX | MA | S  |
|   |   |    | SX |    |
|   |   |    |    | SX |


- |   |   |    |    |    |
|---|---|----|----|----|
| I | D | EX | MA | S  |
|   |   | D  | SX |    |
|   |   |    | D  | SX |

**Figure 8.2** *Instruction Execution Patterns (cont)*


19. LDC.L to SR: 4 issue cycles




20. STC from DBR/GBR/Rp\_BANK/SR/SSR/SPC/VBR: 2 issue cycles




21. STC.L from SGR: 3 issue cycles




22. STC.L from DBR/GBR/Rp\_BANK/SR/SSR/SPC/VBR: 2 issue cycles




23. STC.L from SGR: 3 issue cycles




24. LDS to PR, JSR, BSRF: 2 issue cycles




25. LDS.L to PR: 2 issue cycles




26. STS from PR: 2 issue cycles




27. STS.L from PR: 2 issue cycles




28. MACH/L definition: 1 issue cycle




29. LDS.L to MACH/L: 1 issue cycle



30. STS from MACH/L: 1 issue cycle



**Figure 8.2** Instruction Execution Patterns (cont)

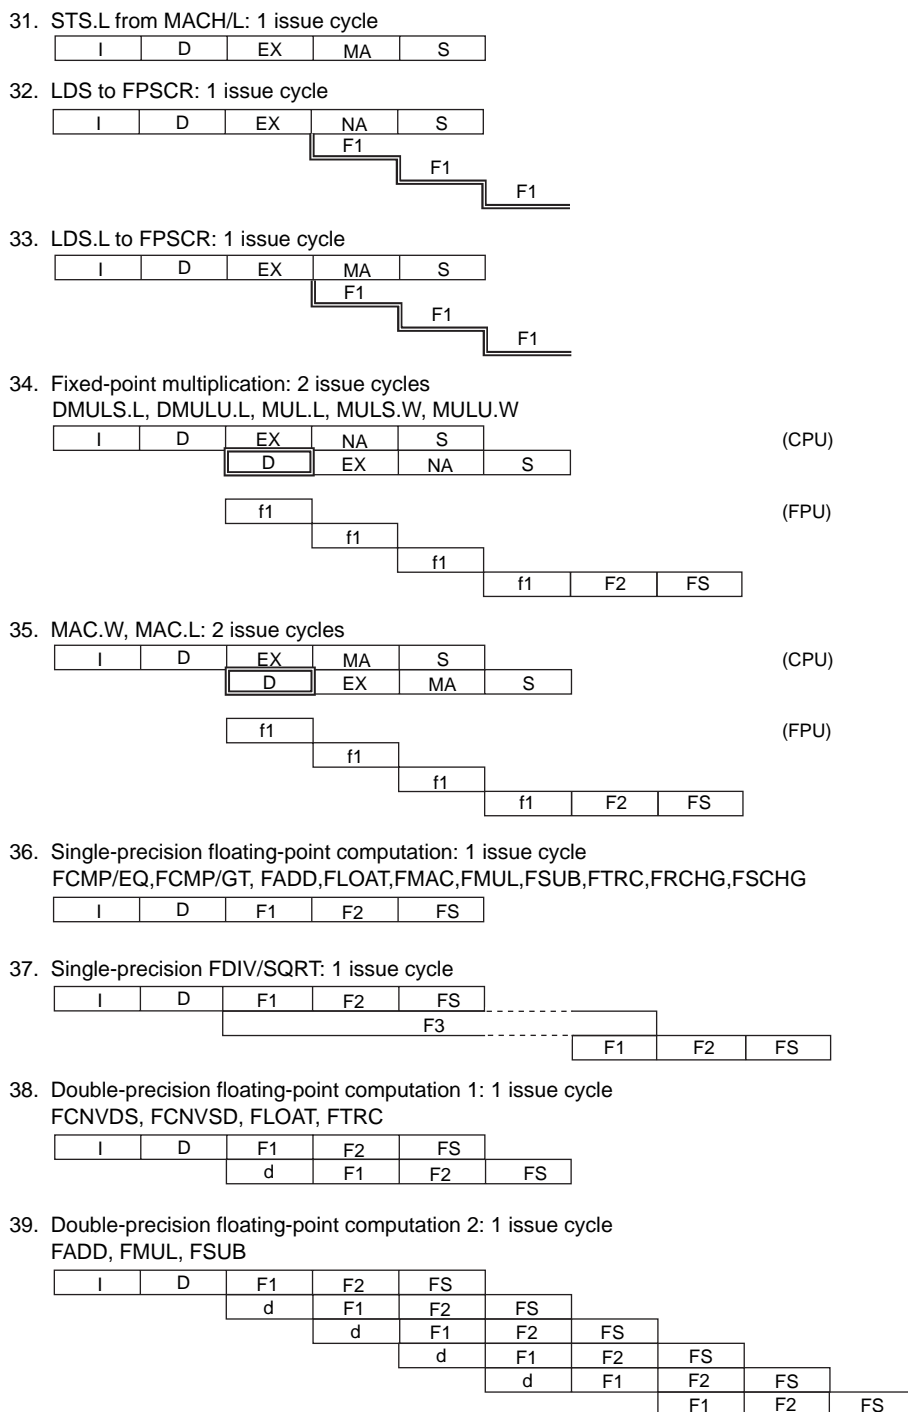

**Figure 8.2** Instruction Execution Patterns (cont)

40. Double-precision FCMP: 2 issue cycles  
FCMP/EQ,FCMP/GT

I	D	F1	F2	FS	
		D	F1	F2	FS

41. Double-precision FDIV/SQRT: 1 issue cycle  
FDIV, FSQRT

I	D	F1	F2	FS					
		d	F1	F2					
				F3					
					F1	F2	F3		
						F1	F2	F3	
							F1	F2	F3

42. FIPR: 1 issue cycle

I	D	F0	F1	F2	FS
---	---	----	----	----	----

43. FTRV: 1 issue cycle

I	D	F0	F1	F2	FS			
		d	F0	F1	F2	FS		
			d	F0	F1	F2	FS	
				d	F0	F1	F2	FS

Notes: ?? : Cannot overlap a stage of the same kind, except when two instructions are executed in parallel.

D : Locks D-stage

d : Register read only

?? : Locks, but no operation is executed.

f1 : Can overlap another f1, but not another F1.

**Figure 8.2** Instruction Execution Patterns (cont)

## 8.2 Parallel-Executability

Instructions are categorized into six groups according to the internal function blocks used, as shown in table 8.1. Table 8.2 shows the parallel-executability of pairs of instructions in terms of groups. For example, ADD in the EX group and BRA in the BR group can be executed in parallel.

**Table 8.1** *Instruction Groups*

1. MT Group					
<b>CLRT</b>		CMP/HI	Rm,Rn	MOV	Rm,Rn
<b>CMP/EQ</b>	#imm,R0	CMP/HS	Rm,Rn	NOP	
<b>CMP/EQ</b>	Rm,Rn	CMP/PL	Rn	SETT	
<b>CMP/GE</b>	Rm,Rn	CMP/PZ	Rn	TST	#imm,R0
<b>CMP/GT</b>	Rm,Rn	CMP/STR	Rm,Rn	TST	Rm,Rn

2. EX Group					
<b>ADD</b>	#imm,Rn	MOVT	Rn	SHLL 2	Rn
<b>ADD</b>	Rm,Rn	NEG	Rm,Rn	SHLL 8	Rn
<b>ADDC</b>	Rm,Rn	NEGC	Rm,Rn	SHL R	Rn
<b>ADDV</b>	Rm,Rn	NOT	Rm,Rn	SHL R16	Rn
<b>AND</b>	#imm,R0	OR	#imm, R0	SHL R2	Rn
<b>AND</b>	Rm,Rn	OR	Rm,Rn	SHL R8	Rn
<b>DIV0S</b>	Rm,Rn	ROTCL	Rn	SUB	Rm,Rn
<b>DIV0U</b>		ROTCR	Rn	SUB C	Rm,Rn
<b>DIV1</b>	Rm,Rn	ROTL	Rn	SUB V	Rm,Rn
<b>DT</b>	Rn	ROTR	Rn	SWA P.B	Rm,Rn
<b>EXTS.B</b>	Rm,Rn	SHAD	Rm,Rn	SWA P.W	Rm,Rn
<b>EXTS.W</b>	Rm,Rn	SHAL	Rn	XOR	#imm,R0
<b>EXTU.B</b>	Rm,Rn	SHAR	Rn	XOR	Rm,Rn



## 2. EX Group

<b>EXTU.W</b>	Rm,Rn	SHLD	Rm,Rn	XTR CT	Rm,Rn
<b>MOV</b>	#imm,Rn	SHLL	Rn		
<b>MOVA</b>	@(disp,P C),R0	SHLL16	Rn		

## 3. BR Group

<b>BF</b>	disp	BRA	disp	BT	disp
<b>BF/S</b>	disp	BSR	disp	BT/S	disp

## 4. LS Group

<b>FABS</b>	DRn	FMOV.S	@Rm+,FRn	MOV.L	R0,@(disp,GBR)
<b>FABS</b>	FRn	FMOV.S	FRm,@(R0,Rn)	MOV.L	Rm,@(disp,Rn)
<b>FLDI0</b>	FRn	FMOV.S	FRm,@-Rn	MOV.L	Rm,@(R0,Rn)
<b>FLDI1</b>	FRn	FMOV.S	FRm,@Rn	MOV.L	Rm,@-Rn
<b>FLDS</b>	FRm,FPUL	FNEG	DRn	MOV.L	Rm,@Rn
<b>FMOV</b>	@(R0,Rm),DRn	FNEG	FRn	MOV.W	@(disp,GBR),R0
<b>FMOV</b>	@(R0,Rm),XDn	FSTS	FPUL,FRn	MOV.W	@(disp,PC),Rn
<b>FMOV</b>	@Rm,DRn	LDS	Rm,FPUL	MOV.W	@(disp,Rm),R0
<b>FMOV</b>	@Rm,XDn	MOV.B	@(disp,GBR),R0	MOV.W	@(R0,Rm),Rn
<b>FMOV</b>	@Rm+,DRn	MOV.B	@(disp,Rm),R0	MOV.W	@Rm,Rn
<b>FMOV</b>	@Rm+,XDn	MOV.B	@(R0,Rm),Rn	MOV.W	@Rm+,Rn
<b>FMOV</b>	DRm,@(R0,Rn)	MOV.B	@Rm,Rn	MOV.W	R0,@(disp,GBR)
<b>FMOV</b>	DRm,@-Rn	MOV.B	@Rm+,Rn	MOV.W	R0,@(disp,Rn)
<b>FMOV</b>	DRm,@Rn	MOV.B	R0,@(disp,GBR)	MOV.W	Rm,@(R0,Rn)
<b>FMOV</b>	DRm,DRn	MOV.B	R0,@(disp,Rn)	MOV.W	Rm,@-Rn
<b>FMOV</b>	DRm,XDn	MOV.B	Rm,@(R0,Rn)	MOV.W	Rm,@Rn
<b>FMOV</b>	FRm,FRn	MOV.B	Rm,@-Rn	MOVCA.L	R0,@Rn
<b>FMOV</b>	XDm,@(R0,Rn)	MOV.B	Rm,@Rn	OCBI	@Rn
<b>FMOV</b>	XDm,@-Rn	MOV.L	@(disp,GBR),R0	OCBP	@Rn

### 4. LS Group

<b>FMOV</b>	XDm,@Rn	MOV.L	@(disp,PC),Rn	OCBWB	@Rn
<b>FMOV</b>	XDm,DRn	MOV.L	@(disp,Rm),Rn	PREF	@Rn
<b>FMOV</b>	XDm,XDn	MOV.L	@(R0,Rm),Rn	STS	FPUL,Rn
<b>FMOV.S</b>	@(R0,Rm),FRn	MOV.L	@Rm,Rn		
<b>FMOV.S</b>	@Rm,FRn	MOV.L	@Rm+,Rn		

### 5. FE Group

<b>FADD</b>	DRm,DRn	FIPR	FVm,FVn	FSQRT	DRn
<b>FADD</b>	FRm,FRn	FLOAT	FPUL,DRn	FSQRT	FRn
<b>FCMP/EQ</b>	FRm,FRn	FLOAT	FPUL,FRn	FSUB	DRm,DRn
<b>FCMP/GT</b>	FRm,FRn	FMAC	FR0,FRm,FRn	FSUB	FRm,FRn
<b>FCNVDS</b>	DRm,FPUL	FMUL	DRm,DRn	FTRC	DRm,FPUL
<b>FCNVSD</b>	FPUL,DRn	FMUL	FRm,FRn	FTRC	FRm,FPUL
<b>FDIV</b>	DRm,DRn	FRCHG		FTRV	XMTRX,FVn
<b>FDIV</b>	FRm,FRn	FSCHG			

### 6. CO Group

<b>AND.B</b>	#imm,@(R0,GBR)	LDS	Rm,FPSCR	STC	SR,Rn
<b>BRAF</b>	Rm	LDS	Rm,MACH	STC	SSR,Rn
<b>BSRF</b>	Rm	LDS	Rm,MACL	STC	VBR,Rn
<b>CLRMAC</b>		LDS	Rm,PR	STC.L	DBR,@-Rn
<b>CLRS</b>		LDS.L	@Rm+,FPSCR	STC.L	GBR,@-Rn
<b>DMULS.L</b>	Rm,Rn	LDS.L	@Rm+,FPUL	STC.L	Rp_BANK,@-Rn
<b>DMULU.L</b>	Rm,Rn	LDS.L	@Rm+,MACH	STC.L	SGR,@-Rn
<b>FCMP/EQ</b>	DRm,DRn	LDS.L	@Rm+,MACL	STC.L	SPC,@-Rn
<b>FCMP/GT</b>	DRm,DRn	LDS.L	@Rm+,PR	STC.L	SR,@-Rn
<b>JMP</b>	@Rn	LDTLB		STC.L	SSR,@-Rn
<b>JSR</b>	@Rn	MAC.L	@Rm+,@Rn+	STC.L	VBR,@-Rn
<b>LDC</b>	Rm,DBR	MAC.W	@Rm+,@Rn+	STS	FPSCR,Rn

6. CO Group					
<b>LDC</b>	Rm,GBR	MUL.L	Rm,Rn	STS	MACH,Rn
<b>LDC</b>	Rm,Rp_BANK	MULS.W	Rm,Rn	STS	MACL,Rn
<b>LDC</b>	Rm,SPC	MULU.W	Rm,Rn	STS	PR,Rn
<b>LDC</b>	Rm,SR	OR.B	#imm,@(R0,GBR)	STS.L	FPSCR,@-Rn
<b>LDC</b>	Rm,SSR	RTE		STS.L	FPUL,@-Rn
<b>LDC</b>	Rm,VBR	RTS		STS.L	MACH,@-Rn
<b>LDC.L</b>	@Rm+,DBR	SETS		STS.L	MACL,@-Rn
<b>LDC.L</b>	@Rm+,GBR	SLEEP		STS.L	PR,@-Rn
<b>LDC.L</b>	@Rm+,Rp_BANK	STC	DBR,Rn	TAS.B	@Rn
<b>LDC.L</b>	@Rm+,SPC	STC	GBR,Rn	TRAPA	#imm
<b>LDC.L</b>	@Rm+,SR	STC	Rp_BANK,Rn	TST.B	#imm,@(R0,GBR)
<b>LDC.L</b>	@Rm+,SSR	STC	SGR,Rn	XOR.B	#imm,@(R0,GBR)
<b>LDC.L</b>	@Rm+,VBR	STC	SPC,Rn		

Table 8.2 *Parallel-Executability*

		2nd Instruction					
		MT	EX	BR	LS	FE	CO
<b>1st Instruction</b>	MT	0	0	0	0	0	X
	EX	0	X	0	0	0	X
	BR	0	0	X	0	0	X
	LS	0	0	0	X	0	X
	FE	0	0	0	0	X	X
	CO	X	X	X	X	X	X

0: Can be executed in parallel

X: Cannot be executed in parallel

## 8.3 Execution Cycles and Pipeline Stalling

There are three basic clocks in this processor: the I-clock, B-clock, and P-clock. Each hardware unit operates on one of these clocks, as follows:

- I-clock: CPU, FPU, MMU, caches
- B-clock: External bus controller
- P-clock: Peripheral units

The frequency ratios of the three clocks are determined with the frequency control register (FRQCR). In this section, machine cycles are based on the I-clock unless otherwise specified. For details of FRQCR, see section 10, Clock Oscillation Circuits.

Instruction execution cycles are summarized in table 8.3. Penalty cycles due to a pipeline stall or freeze are not considered in this table.

- Issue rate: Interval between the issue of an instruction and that of the next instruction
- Latency: Interval between the issue of an instruction and the generation of its result (completion)
- Instruction execution pattern (see figure 8.2)
- Locked pipeline stages
- Interval between the issue of an instruction and the start of locking
- Lock time: Period of locking in machine cycle units

The instruction execution sequence is expressed as a combination of the execution patterns shown in figure 8.2. One instruction is separated from the next by the number of machine cycles for its issue rate. Normally, execution, data access, and write-back stages cannot be overlapped onto the same stages of another instruction; the only exception is when two instructions are executed in parallel under parallel-executability conditions. Refer to (a) through (d) in figure 8.3 for some simple examples.

Latency is the interval between issue and completion of an instruction, and is also the interval between the execution of two instructions with an interdependent relationship. When there is interdependency between two instructions fetched simultaneously, the latter of the two is stalled for the following number of cycles:

- (Latency) cycles when there is flow dependency (read-after-write)
- (Latency - 2) cycles when there is output dependency (write-after-write)
- 1 or 2 cycles when there is anti-flow dependency (write-after-read), as in the following cases:
  - FTRV is the preceding instruction (1 cycle)
  - A double-precision FADD, FSUB, or FMUL is the preceding instruction (2 cycles)

In the case of flow dependency, latency may be exceptionally increased or decreased, depending on the combination of sequential instructions (figure 8.3 (e)).

- When a floating-point (FP) computation is followed by an FP register store, the latency of the FP computation may be decreased by 1 cycle.
- If there is a load of the shift amount immediately before an SHAD/SHLD instruction, the latency of the load is increased by 1 cycle.
- If an instruction with a latency of less than 2 cycles, including write-back to an FP register, is followed by a double-precision FP instruction, FIPR, or FTRV, the latency of the first instruction is increased to 2 cycles.

The number of cycles in a pipeline stall due to flow dependency will vary depending on the combination of interdependent instructions or the fetch timing (see figure 8.3. (e)).

For the stall cycles of an instruction with output dependency, the longest latency to the last write-back among all the destination operands must be applied instead of “latency-2” (see figure 8.3 (f)). A stall due to output dependency with respect to FPSCR, which reflects the result of an FP operation, never occurs. For example, when FADD follows FDIV with no dependency between FP registers, FADD is not stalled even if both instructions update the cause field of FPSCR.

Anti-flow dependency can occur only between a preceding double-precision FADD, FMUL, FSUB, or FTRV and a following FMOV, FLDI0, FLDI1, FABS, or FNEG. See figure 8.3 (g).


If an executing instruction locks any resource—i.e. a function block that performs a basic operation—a following instruction that happens to attempt to use the locked resource must be stalled (figure 8.3 (h)). This kind of stall can be compensated by inserting one or more instructions independent of the locked resource to separate the interfering instructions. For example, when a load instruction and an ADD instruction that references the loaded value are consecutive, the 2-cycle stall of the ADD is eliminated by inserting three instructions without dependency. Software performance can be improved by such instruction scheduling.

Other penalties arise in the event of exceptions or external data accesses, as follows.

- Instruction TLB miss: a penalty of 7 CPU clocks
- Instruction access to external memory (instruction cache miss, etc.)
- Data access to external memory (operand cache miss, etc.): a penalty of 2 CPU clocks + 3 bus clocks
- Data access to a memory-mapped control register. The penalty differs from register to register, and depends on the kind of operation (read or write), the clock mode, and the bus use conditions when the access is made.


During the penalty cycles of an instruction TLB miss or external instruction access, no instruction is issued, but execution of instructions that have already been issued continues. The penalty for a data access is a pipeline freeze: that is, the execution of uncompleted instructions is interrupted until the arrival of the requested data. The number of penalty cycles for instruction and data accesses is largely dependent on the user’s memory subsystems.

## (a) Serial execution: non-parallel-executable instructions

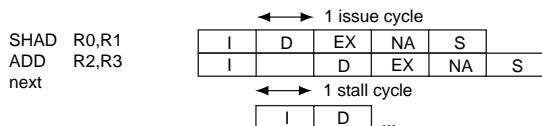


EX-group SHAD and EX-group ADD cannot be executed in parallel. Therefore, SHAD is issued first, and the following ADD is recombined with the next instruction.

## (b) Parallel execution: parallel-executable and no dependency




EX-group ADD and LS-group MOV.L can be executed in parallel. Overlapping of stages in the 2nd instruction is possible.

## (c) Issue rate: multi-step instruction

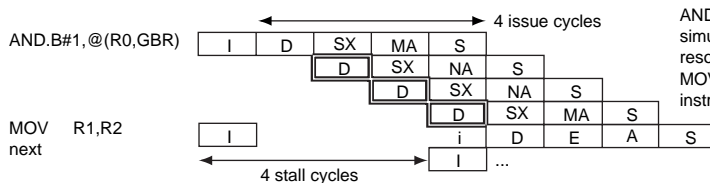


AND.B and MOV are fetched simultaneously, but MOV is stalled due to resource locking. After the lock is released, MOV is refetched together with the next instruction.


## (d) Branch



No stall occurs if the branch is not taken.




If the branch is taken, the I-stage of the branch destination is stalled for the period of latency. This stall can be covered with a delay slot instruction which is not parallel-executable with the branch instruction.




Even if the BT/BF branch is taken, the I-stage of the branch destination is not stalled if the displacement is zero.

**Figure 8.3** Examples of Pipelined Execution




**Figure 8.3** *Examples of Pipelined Execution (cont)*


(e) Flow dependency (cont)

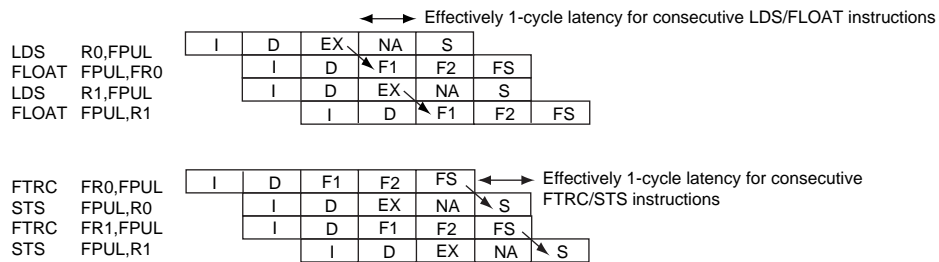

(f) Output dependency

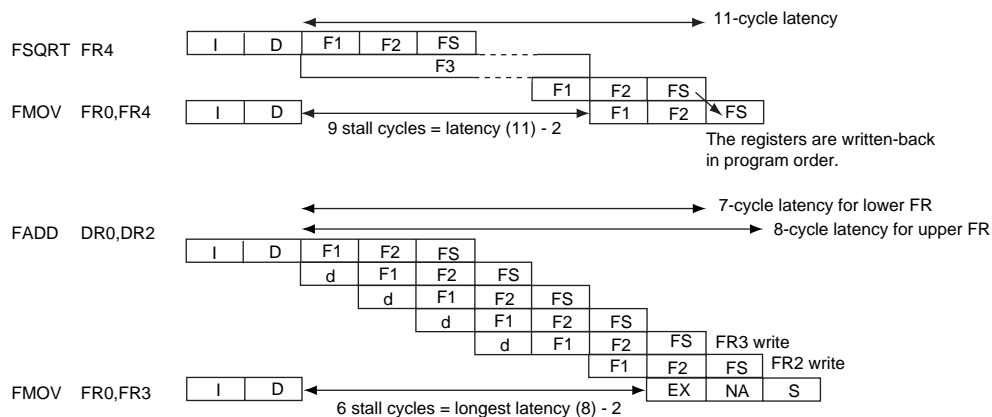

(g) Anti-flow dependency

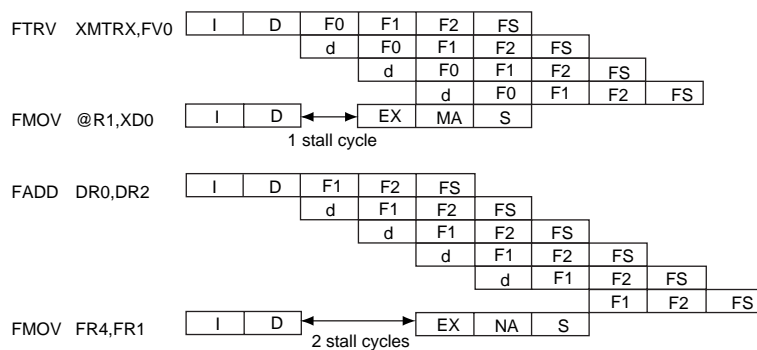

**Figure 8.3** *Examples of Pipelined Execution (cont)*



## (h) Resource conflict

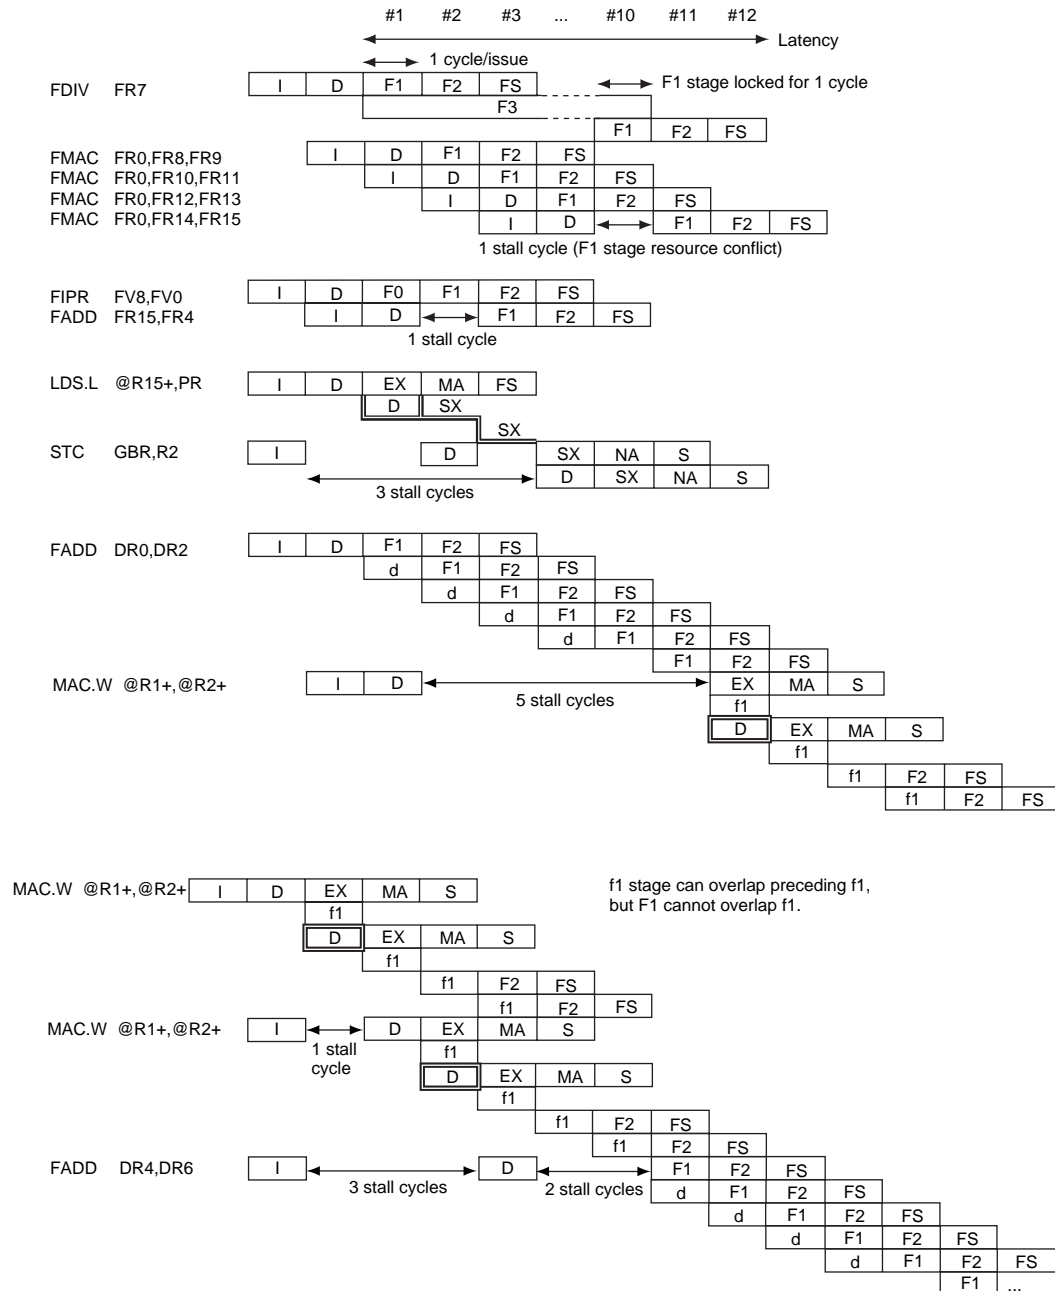


Figure 8.3 Examples of Pipelined Execution (cont)

**Table 8.3 Execution Cycles**

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
Data transfer instructions	1	EXTS.B	Rm,Rn	EX	1	1	#1	—	—	—
	2	EXTS.W	Rm,Rn	EX	1	1	#1	—	—	—
	3	EXTU.B	Rm,Rn	EX	1	1	#1	—	—	—
	4	EXTU.W	Rm,Rn	EX	1	1	#1	—	—	—
	5	MOV	Rm,Rn	MT	1	0	#1	—	—	—
	6	MOV	#imm,Rn	EX	1	1	#1	—	—	—
	7	MOVA	@(disp,PC),R0	EX	1	1	#1	—	—	—
	8	MOV.W	@(disp,PC),Rn	LS	1	2	#2	—	—	—
	9	MOV.L	@(disp,PC),Rn	LS	1	2	#2	—	—	—
	10	MOV.B	@Rm,Rn	LS	1	2	#2	—	—	—
	11	MOV.W	@Rm,Rn	LS	1	2	#2	—	—	—
	12	MOV.L	@Rm,Rn	LS	1	2	#2	—	—	—
	13	MOV.B	@Rm+,Rn	LS	1	1/2	#2	—	—	—
	14	MOV.W	@Rm+,Rn	LS	1	1/2	#2	—	—	—
	15	MOV.L	@Rm+,Rn	LS	1	1/2	#2	—	—	—
	16	MOV.B	@(disp,Rm),R0	LS	1	2	#2	—	—	—
	17	MOV.W	@(disp,Rm),R0	LS	1	2	#2	—	—	—
	18	MOV.L	@(disp,Rm),Rn	LS	1	2	#2	—	—	—
	19	MOV.B	@(R0,Rm),Rn	LS	1	2	#2	—	—	—
	20	MOV.W	@(R0,Rm),Rn	LS	1	2	#2	—	—	—
	21	MOV.L	@(R0,Rm),Rn	LS	1	2	#2	—	—	—
	22	MOV.B	@(disp,GBR),R0	LS	1	2	#3	—	—	—
	23	MOV.W	@(disp,GBR),R0	LS	1	2	#3	—	—	—
	24	MOV.L	@(disp,GBR),R0	LS	1	2	#3	—	—	—
	25	MOV.B	Rm,@Rn	LS	1	1	#2	—	—	—
	26	MOV.W	Rm,@Rn	LS	1	1	#2	—	—	—
	27	MOV.L	Rm,@Rn	LS	1	1	#2	—	—	—
	28	MOV.B	Rm,@-Rn	LS	1	1/1	#2	—	—	—

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock				
							Stage	Start	Cycles		
Fixed-point arithmetic instructions	29	MOV.W	Rm,@-Rn	LS	1	1/1	#2	—	—	—	
	30	MOV.L	Rm,@-Rn	LS	1	1/1	#2	—	—	—	
	31	MOV.B	R0,@(disp,Rn)	LS	1	1	#2	—	—	—	
	32	MOV.W	R0,@(disp,Rn)	LS	1	1	#2	—	—	—	
	33	MOV.L	Rm,@(disp,Rn)	LS	1	1	#2	—	—	—	
	34	MOV.B	Rm,@(R0,Rn)	LS	1	1	#2	—	—	—	
	35	MOV.W	Rm,@(R0,Rn)	LS	1	1	#2	—	—	—	
	36	MOV.L	Rm,@(R0,Rn)	LS	1	1	#2	—	—	—	
	37	MOV.B	R0,@(disp,GBR)	LS	1	1	#3	—	—	—	
	38	MOV.W	R0,@(disp,GBR)	LS	1	1	#3	—	—	—	
	39	MOV.L	R0,@(disp,GBR)	LS	1	1	#3	—	—	—	
	40	MOVCA.L	R0,@Rn	LS	1	3–7	#12	MA	4	3–7	
	41	MOVT	Rn	EX	1	1	#1	—	—	—	
	42	OCBI	@Rn	LS	1	1–2	#10	MA	4	1–2	
	43	OCBP	@Rn	LS	1	1–5	#11	MA	4	1–5	
	44	OCBWB	@Rn	LS	1	1–5	#11	MA	4	1–5	
	45	PREF	@Rn	LS	1	1	#2	—	—	—	
	46	SWAP.B	Rm,Rn	EX	1	1	#1	—	—	—	
	47	SWAP.W	Rm,Rn	EX	1	1	#1	—	—	—	
	48	XTRCT	Rm,Rn	EX	1	1	#1	—	—	—	
		49	ADD	Rm,Rn	EX	1	1	#1	—	—	—
		50	ADD	#imm,Rn	EX	1	1	#1	—	—	—
		51	ADDC	Rm,Rn	EX	1	1	#1	—	—	—
		52	ADDV	Rm,Rn	EX	1	1	#1	—	—	—
		53	CMP/EQ	#imm,R0	MT	1	1	#1	—	—	—
		54	CMP/EQ	Rm,Rn	MT	1	1	#1	—	—	—
		55	CMP/GE	Rm,Rn	MT	1	1	#1	—	—	—
		56	CMP/GT	Rm,Rn	MT	1	1	#1	—	—	—
		57	CMP/HI	Rm,Rn	MT	1	1	#1	—	—	—

Functional Category	No.	Instruction		Instruction Group	Issue Rate	Latency	Execution Pattern	Lock		
								Stage	Start	Cycles
	58	CMP/HS	Rm,Rn	MT	1	1	#1	—	—	—
	59	CMP/PL	Rn	MT	1	1	#1	—	—	—
	60	CMP/PZ	Rn	MT	1	1	#1	—	—	—
	61	CMP/STR	Rm,Rn	MT	1	1	#1	—	—	—
	62	DIVOS	Rm,Rn	EX	1	1	#1	—	—	—
	63	DIV0U		EX	1	1	#1	—	—	—
	64	DIV1	Rm,Rn	EX	1	1	#1	—	—	—
	65	DMULS.L	Rm,Rn	CO	2	4/4	#34	F1	4	2
	66	DMULU.L	Rm,Rn	CO	2	4/4	#34	F1	4	2
	67	DT	Rn	EX	1	1	#1	—	—	—
	68	MAC.L	@Rm+,@Rn+	CO	2	2/2/4/4	#35	F1	4	2
	69	MAC.W	@Rm+,@Rn+	CO	2	2/2/4/4	#35	F1	4	2
	70	MUL.L	Rm,Rn	CO	2	4/4	#34	F1	4	2
	71	MULS.W	Rm,Rn	CO	2	4/4	#34	F1	4	2
	72	MULU.W	Rm,Rn	CO	2	4/4	#34	F1	4	2
	73	NEG	Rm,Rn	EX	1	1	#1	—	—	—
	74	NEGC	Rm,Rn	EX	1	1	#1	—	—	—
	75	SUB	Rm,Rn	EX	1	1	#1	—	—	—
	76	SUBC	Rm,Rn	EX	1	1	#1	—	—	—
	77	SUBV	Rm,Rn	EX	1	1	#1	—	—	—
Logical instructions	78	AND	Rm,Rn	EX	1	1	#1	—	—	—
	79	AND	#imm,R0	EX	1	1	#1	—	—	—
	80	AND.B	#imm,@(R0,GBR)	CO	4	4	#6	—	—	—
	81	NOT	Rm,Rn	EX	1	1	#1	—	—	—
	82	OR	Rm,Rn	EX	1	1	#1	—	—	—
	83	OR	#imm,R0	EX	1	1	#1	—	—	—
	84	OR.B	#imm,@(R0,GBR)	CO	4	4	#6	—	—	—
	85	TAS.B	@Rn	CO	5	5	#7	—	—	—
	86	TST	Rm,Rn	MT	1	1	#1	—	—	—
	87	TST	#imm,R0	MT	1	1	#1	—	—	—

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
	88	TST.B	#imm,@(R0,GBR)	CO	3	3	#5	—	—	—
	89	XOR	Rm,Rn	EX	1	1	#1	—	—	—
	90	XOR	#imm,R0	EX	1	1	#1	—	—	—
	91	XOR.B	#imm,@(R0,GBR)	CO	4	4	#6	—	—	—
Shift instructions	92	ROTL	Rn	EX	1	1	#1	—	—	—
	93	ROTR	Rn	EX	1	1	#1	—	—	—
	94	ROTCL	Rn	EX	1	1	#1	—	—	—
	95	ROTCR	Rn	EX	1	1	#1	—	—	—
	96	SHAD	Rm,Rn	EX	1	1	#1	—	—	—
	97	SHAL	Rn	EX	1	1	#1	—	—	—
	98	SHAR	Rn	EX	1	1	#1	—	—	—
	99	SHLD	Rm,Rn	EX	1	1	#1	—	—	—
	100	SHLL	Rn	EX	1	1	#1	—	—	—
	101	SHLL2	Rn	EX	1	1	#1	—	—	—
	102	SHLL8	Rn	EX	1	1	#1	—	—	—
	103	SHLL16	Rn	EX	1	1	#1	—	—	—
	104	SHLR	Rn	EX	1	1	#1	—	—	—
	105	SHLR2	Rn	EX	1	1	#1	—	—	—
	106	SHLR8	Rn	EX	1	1	#1	—	—	—
	107	SHLR16	Rn	EX	1	1	#1	—	—	—
Branch instructions	108	BF	disp	BR	1	2 (or 1)	#1	—	—	—
	109	BF/S	disp	BR	1	2 (or 1)	#1	—	—	—
	110	BT	disp	BR	1	2 (or 1)	#1	—	—	—
	111	BT/S	disp	BR	1	2 (or 1)	#1	—	—	—
	112	BRA	disp	BR	1	2	#1	—	—	—
	113	BRAF	Rn	CO	2	3	#4	—	—	—
	114	BSR	disp	BR	1	2	#14	SX	3	2
	115	BSRF	Rn	CO	2	3	#24	SX	3	2
	116	JMP	@Rn	CO	2	3	#4	—	—	—

## Dreamcast SH4 Program Manual

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock		
							Stage	Start	Cycles
System control instructions	117	JSR @Rn	CO	2	3	#24	SX	3	2
	118	RTS	CO	2	3	#4	—	—	—
	119	NOP	MT	1	0	#1	—	—	—
	120	CLRMAC	CO	1	3	#28	F1	3	2
	121	CLRS	CO	1	1	#1	—	—	—
	122	CLRT	MT	1	1	#1	—	—	—
	123	SETS	CO	1	1	#1	—	—	—
	124	SETT	MT	1	1	#1	—	—	—
	125	TRAPA #imm	CO	7	7	#13	—	—	—
	126	RTE	CO	5	5	#8	—	—	—
	127	SLEEP	CO	4	4	#9	—	—	—
	128	LDTLB	CO	1	1	#2	—	—	—
	129	LDC Rm,DBR	CO	1	3	#14	SX	3	2
	130	LDC Rm,GBR	CO	3	3	#15	SX	3	2
	131	LDC Rm,Rp_BANK	CO	1	3	#14	SX	3	2
	132	LDC Rm,SR	CO	4	4	#16	SX	3	2
	133	LDC Rm,SSR	CO	1	3	#14	SX	3	2
	134	LDC Rm,SPC	CO	1	3	#14	SX	3	2
	135	LDC Rm,VBR	CO	1	3	#14	SX	3	2
	136	LDC.L @Rm+,DBR	CO	1	1/3	#17	SX	3	2
	137	LDC.L @Rm+,GBR	CO	3	3/3	#18	SX	3	2
	138	LDC.L @Rm+,Rp_BANK	CO	1	1/3	#17	SX	3	2
	139	LDC.L @Rm+,SR	CO	4	4/4	#19	SX	3	2
	140	LDC.L @Rm+,SSR	CO	1	1/3	#17	SX	3	2
	141	LDC.L @Rm+,SPC	CO	1	1/3	#17	SX	3	2
	142	LDC.L @Rm+,VBR	CO	1	1/3	#17	SX	3	2
	143	LDS Rm,MACH	CO	1	3	#28	F1	3	2
	144	LDS Rm,MACL	CO	1	3	#28	F1	3	2
	145	LDS Rm,PR	CO	2	3	#24	SX	3	2
	146	LDS.L @Rm+,MACH	CO	1	1/3	#29	F1	3	2

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
Single-precision floating-point instructions	147	LDS.L	@Rm+,MACL	CO	1	1/3	#29	F1	3	2
	148	LDS.L	@Rm+,PR	CO	2	2/3	#25	SX	3	2
	149	STC	DBR,Rn	CO	2	2	#20	—	—	—
	150	STC	SGR,Rn	CO	3	3	#21	—	—	—
	151	STC	GBR,Rn	CO	2	2	#20	—	—	—
	152	STC	Rp_BANK,Rn	CO	2	2	#20	—	—	—
	153	STC	SR,Rn	CO	2	2	#20	—	—	—
	154	STC	SSR,Rn	CO	2	2	#20	—	—	—
	155	STC	SPC,Rn	CO	2	2	#20	—	—	—
	156	STC	VBR,Rn	CO	2	2	#20	—	—	—
	157	STC.L	DBR,@-Rn	CO	2	2/2	#22	—	—	—
	158	STC.L	SGR,@-Rn	CO	3	3/3	#23	—	—	—
	159	STC.L	GBR,@-Rn	CO	2	2/2	#22	—	—	—
	160	STC.L	Rp_BANK,@-Rn	CO	2	2/2	#22	—	—	—
	161	STC.L	SR,@-Rn	CO	2	2/2	#22	—	—	—
	162	STC.L	SSR,@-Rn	CO	2	2/2	#22	—	—	—
	163	STC.L	SPC,@-Rn	CO	2	2/2	#22	—	—	—
	164	STC.L	VBR,@-Rn	CO	2	2/2	#22	—	—	—
	165	STS	MACH,Rn	CO	1	3	#30	—	—	—
	166	STS	MACL,Rn	CO	1	3	#30	—	—	—
	167	STS	PR,Rn	CO	2	2	#26	—	—	—
	168	STS.L	MACH,@-Rn	CO	1	1/1	#31	—	—	—
	169	STS.L	MACL,@-Rn	CO	1	1/1	#31	—	—	—
	170	STS.L	PR,@-Rn	CO	2	2/2	#27	—	—	—
Single-precision floating-point instructions	171	FLDIO	FRn	LS	1	0	#1	—	—	—
	172	FLDI1	FRn	LS	1	0	#1	—	—	—
	173	FMOV	FRm,FRn	LS	1	0	#1	—	—	—
	174	FMOV.S	@Rm,FRn	LS	1	2	#2	—	—	—
	175	FMOV.S	@Rm+,FRn	LS	1	1/2	#2	—	—	—

## Dreamcast SH4 Program Manual

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
Double-precision floating-point instructions	176	FMOV.S	@(R0,Rm),FRn	LS	1	2	#2	—	—	—
	177	FMOV.S	FRm,@Rn	LS	1	1	#2	—	—	—
	178	FMOV.S	FRm,@-Rn	LS	1	1/1	#2	—	—	—
	179	FMOV.S	FRm,@(R0,Rn)	LS	1	1	#2	—	—	—
	180	FLDS	FRm,FPUL	LS	1	0	#1	—	—	—
	181	FSTS	FPUL,FRn	LS	1	0	#1	—	—	—
	182	FABS	FRn	LS	1	0	#1	—	—	—
	183	FADD	FRm,FRn	FE	1	3/4	#36	—	—	—
	184	FCMP/EQ	FRm,FRn	FE	1	2/4	#36	—	—	—
	185	FCMP/GT	FRm,FRn	FE	1	2/4	#36	—	—	—
	186	FDIV	FRm,FRn	FE	1	12/13	#37	F3	2	10
								F1	11	1
	187	FLOAT	FPUL,FRn	FE	1	3/4	#36	F1	2	2
	188	FMAC	FR0,FRm,FRn	FE	1	3/4	#36	—	—	—
	189	FMUL	FRm,FRn	FE	1	3/4	#36	—	—	—
	190	FNEG	FRn	LS	1	0	#1	—	—	—
	191	FSQRT	FRn	FE	1	11/12	#37	F3	2	9
								F1	10	1
	192	FSUB	FRm,FRn	FE	1	3/4	#36	—	—	—
	193	FTRC	FRm,FPUL	FE	1	3/4	#36	—	—	—
	194	FMOV	DRm,DRn	LS	1	0	#1	—	—	—
	195	FMOV	@Rm,DRn	LS	1	2	#2	—	—	—
	196	FMOV	@Rm+,DRn	LS	1	1/2	#2	—	—	—
197	FMOV	@(R0,Rm),DRn	LS	1	2	#2	—	—	—	
198	FMOV	DRm,@Rn	LS	1	1	#2	—	—	—	
199	FMOV	DRm,@-Rn	LS	1	1/1	#2	—	—	—	
200	FMOV	DRm,@(R0,Rn)	LS	1	1	#2	—	—	—	
	201	FABS	DRn	LS	1	0	#1	—	—	—
	202	FADD	DRm,DRn	FE	1	(7, 8)/9	#39	F1	2	6
	203	FCMP/EQ	DRm,DRn	CO	2	3/5	#40	F1	2	2



Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
FPU system control instructions	204	FCMP/GT	DRm,DRn	CO	2	3/5	#40	F1	2	2
	205	FCNVDS	DRm,FPUL	FE	1	4/5	#38	F1	2	2
	206	FCNVSD	FPUL,DRn	FE	1	(3, 4)/5	#38	F1	2	2
	207	FDIV	DRm,DRn	FE	1	(24, 25)/26	#41	F3	2	21
								F1	20	3
	208	FLOAT	FPUL,DRn	FE	1	(3, 4)/5	#38	F1	2	2
	209	FMUL	DRm,DRn	FE	1	(7, 8)/9	#39	F1	2	6
	210	FNEG	DRn	LS	1	0	#1	—	—	—
	211	FSQRT	DRn	FE	1	(23, 24)/25	#41	F3	2	20
								F1	19	3
	212	FSUB	DRm,DRn	FE	1	(7, 8)/9	#39	F1	2	6
	213	FTRC	DRm,FPUL	FE	1	4/5	#38	F1	2	2
	Graphics acceleration instructions	214	LDS	Rm,FPUL	LS	1	1	#1	—	—
215		LDS	Rm,FPSCR	CO	1	4	#32	F1	3	3
216		LDS.L	@Rm+,FPUL	CO	1	1/2	#2	—	—	—
217		LDS.L	@Rm+,FPSCR	CO	1	1/4	#33	F1	3	3
218		STS	FPUL,Rn	LS	1	3	#1	—	—	—
219		STS	FPSCR,Rn	CO	1	3	#1	—	—	—
220		STS.L	FPUL,@-Rn	CO	1	1/1	#2	—	—	—
221		STS.L	FPSCR,@-Rn	CO	1	1/1	#2	—	—	—
222		FMOV	DRm,XDn	LS	1	0	#1	—	—	—
223		FMOV	XDm,DRn	LS	1	0	#1	—	—	—
224		FMOV	XDm,XDn	LS	1	0	#1	—	—	—
225		FMOV	@Rm,XDn	LS	1	2	#2	—	—	—
226		FMOV	@Rm+,XDn	LS	1	1/2	#2	—	—	—
227		FMOV	@(R0,Rm),XDn	LS	1	2	#2	—	—	—
228		FMOV	XDm,@Rn	LS	1	1	#2	—	—	—
229		FMOV	XDm,@-Rm	LS	1	1/1	#2	—	—	—
230		FMOV	XDm,@(R0,Rn)	LS	1	1	#2	—	—	—

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock			
							Stage	Start	Cycles	
	231	FIPR	FVm,FVn	FE	1	4/5	#42	F1	3	1
	232	FRCHG		FE	1	1/4	#36	—	—	—
	233	FSCHG		FE	1	1/4	#36	—	—	—
	234	FTRV	XMTRX,FVn	FE	1	(5, 5, 6, 7)/8	#43	F0	2	4

Functional Category	No.	Instruction	Instruction Group	Issue Rate	Latency	Execution Pattern	Lock		
							Stage	Start	Cycles
Notes:	1.	See table 8.1 for the instruction groups.					F1	3	4
	2.	Latency “L1/L2...”: Latency corresponding to a write to each register, including MACH/MACL/FPSCR. Example: MOV.B @Rm+, Rn “1/2”: The latency for Rm is 1 cycle, and the latency for Rn is 2 cycles.							
	3.	Branch latency: Interval until the branch destination instruction is fetched							
	4.	Conditional branch latency “2 (or 1)”: The latency is 2 for a nonzero displacement, and 1 for a zero displacement.							
	5.	Double-precision floating-point instruction latency “(L1, L2)/L3”: L1 is the latency for FR [n+1], L2 that for FR [n], and L3 that for FPSCR.							
	6.	FTRV latency “(L1, L2, L3, L4)/L5”: L1 is the latency for FR [n], L2 that for FR [n+1], L3 that for FR [n+2], L4 that for FR [n+3], and L5 that for FPSCR.							
	7.	Latency “L1/L2/L3/L4” of MAC.L and MAC.W instructions: L1 is the latency for Rm, L2 that for Rn, L3 that for MACH, and L4 that for MACL.							
	8.	Latency “L1/L2” of MUL.L, MULS.W, MULU.W, DMULS.L, and DMULU.L instructions: L1 is the latency for MACH, and L2 that for MACL.							
	9.	Execution pattern: The instruction execution pattern number (see figure 8.2)							
	10.	Lock/stage: Stage locked by the instruction							
	11.	Lock/start: Locking start cycle; 1 is the first D-stage of the instruction.							
	12.	Lock/cycles: Number of cycles locked							
Exceptions:									
	1.	When a floating-point operation instruction is followed by a floating-point store, the latency of the floating-point operation is decreased by 1 cycle.							
	2.	When the preceding instruction loads the shift amount of the following SHAD/SHLD, the latency of the load is increased by 1 cycle.							
	3.	When an LS group instruction with a latency of less than 3 cycles is followed by a double-precision floating-point instruction, FIPR, or FTRV, the latency of the first instruction is increased to 3 cycles. Example: In the case of FMOV FR4,FR0 and FIPR FV0,FV4, FIPR is stalled for 2 cycles.							
	4.	When MAC*/MUL* is followed by an STS.L MAC*, @-Rn instruction, the latency of MAC*/MUL* is 5 cycles.							
	5.	In the case of consecutive executions of MAC.W/MAC.L, the latency is decreased to 2 cycles.							
	6.	When an LDS to MAC* is followed by an STS.L MAC*, @-Rn instruction, the latency of the LDS to MAC* is 4 cycles.							
	7.	When an LDS to MAC* is followed by MAC.W/MAC.L, the latency of the LDS to MAC* is 1 cycle.							
	8.	When an FSCHG or FRCHG instruction is followed by an LS group instruction that reads or writes to a floating-point register, the aforementioned LS group instruction[s] cannot be executed in parallel.							
	9.	When a single-precision FTRC instruction is followed by an STS FPUL, Rn instruction, the latency of the single-precision FTRC instruction is 1 cycle.							





## ***9. Power-Down Modes***

---

### **9.1 Overview**

In the power-down modes, some of the on-chip peripheral modules and the CPU functions are halted, enabling power consumption to be reduced.

#### **9.1.1 Types of Power-Down Modes**

The following power-down modes and functions are provided:

- Sleep mode
- Deep sleep mode
- Standby mode
- Module standby function (TMU, RTC, SCI/SCIF, and DMAC on-chip peripheral modules)

Table 9.1 shows the conditions for entering these modes from the program execution state, the status of the CPU and peripheral modules in each mode, and the method of exiting each mode.

**Table 9.1 Status of CPU and Peripheral Modules in Power-Down Modes**

Power-Down Mode	Entering Conditions	CPG	CPU	On-Chip Memory	On-chip Peripheral Modules	Pins	External Memory	Exiting Method
Sleep	SLEEP instruction executed while STBY bit is 0 in STBCR	Operating	Halted (registers held)	Held	Operating	Held	Refreshing	<ul style="list-style-type: none"><li>• Interrupt</li><li>• Reset</li></ul>
Deep sleep	SLEEP instruction executed while STBY bit is 0 in STBCR, and DSLP bit is 1 in STBCR2	Operating	Halted (registers held)	Held	Operating (DMA halted)	Held	Self-refreshing	<ul style="list-style-type: none"><li>• Interrupt</li><li>• Reset</li></ul>
Standby	SLEEP instruction executed while STBY bit is 1 in STBCR	Halted	Halted (registers held)	Held	Halted*	Held	Self-refreshing	<ul style="list-style-type: none"><li>• Interrupt</li><li>• Reset</li></ul>
Module standby	Setting MSTP bit to 1 in STBCR	Operating	Operating	Held	Specified modules halted*	Held	Refreshing	<ul style="list-style-type: none"><li>• Clearing MSTP bit to 0</li><li>• Reset</li></ul>

**Note:** The RTC operates when the START bit in RCR2 is 1 (see section 11, Realtime Clock (RTC), in the Hardware Manual).

## 9.1.2 Register Configuration

Table 9.2 shows the registers used for power-down mode control.

**Table 9.2 Power-Down Mode Registers**

Name	Abbreviation	R/W	Initial Value	P4 Address	Area 7 Address	Access Size
Standby control register	STBCR	R/W	H'00	H'FFC00004	H'1FC00004	8
Standby control register 2	STBCR2	R/W	H'00	H'FFC00010	H'1FC00010	8

## 9.2 Register Descriptions

### 9.2.1 Standby Control Register (STBCR)

The standby control register (STBCR) is an 8-bit readable/writable register that specifies the power-down mode status. It is initialized to H'00 by a power-on reset via the RESET pin or due to watchdog timer overflow.

Bit:	7	6	5	4	3	2	1	0
	STBY	PHZ	PPU	MSTP4	MSTP3	MSTP2	MSTP1	MSTP0
Initial value:	0	0	0	0	0	0	0	0
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

**Bit 7—Standby (STBY):** Specifies a transition to standby mode.

Bit 7: STBY	Description	
0	Transition to sleep mode on execution of SLEEP instruction	(Initial value)
1	Transition to standby mode on execution of SLEEP instruction	

**Bit 6—Peripheral Module Pin High Impedance Control (PHZ):** Controls the state of peripheral module related pins in standby mode. When the PHZ bit is set to 1, peripheral module related pins go to the high-impedance state in standby mode.

For the relevant pins, see section 9.2.2, Peripheral Module Pin High Impedance Control.

Bit 6: PHZ	Description	
0	Peripheral module related pins are in normal state	(Initial value)
1	Peripheral module related pins go to high-impedance state	

**Bit 5—Peripheral Module Pin Pull-Up Control (PPU):** Controls the state of peripheral module related pins. When the PPU bit is cleared to 0, the pull-up resistor is turned on for peripheral module related pins in the input or high-impedance state.

For the relevant pins, see section 9.2.3, Peripheral Module Pin Pull-Up Control.

Bit 5: PPU	Description	
0	Peripheral module related pin pull-up resistors are on	(Initial value)
1	Peripheral module related pin pull-up resistors are off	

**Bit 4—Module Stop 4 (MSTP4):** Specifies stopping of the clock supply to the DMAC among the on-chip peripheral modules. The clock supply to the DMAC is stopped when the MSTP4 bit is set to 1. When DMA transfer is used, stop the transfer before setting the MSTP4 bit to 1. When DMA transfer is performed after clearing the MSTP4 bit to 0, DMAC settings must be made again.

Bit 4: MSTP4	Description	
0	DMAC operates	(Initial value)
1	DMAC clock supply is stopped	

**Bit 3—Module Stop 3 (MSTP3):** Specifies stopping of the clock supply to serial communication interface channel 2 (SCIF) among the on-chip peripheral modules. The clock supply to the SCIF is stopped when the MSTP3 bit is set to 1.

Bit 3: MSTP3	Description	
0	SCIF operates	(Initial value)
1	SCIF clock supply is stopped	

**Bit 2—Module Stop 2 (MSTP2):** Specifies stopping of the clock supply to the timer unit (TMU) among the on-chip peripheral modules. The clock supply to the TMU is stopped when the MSTP2 bit is set to 1.

Bit 2: MSTP2	Description	
0	TMU operates	(Initial value)
1	TMU clock supply is stopped	

**Bit 1—Module Stop 1 (MSTP1):** Specifies stopping of the clock supply to the realtime clock (RTC) among the on-chip peripheral modules. The clock supply to the RTC is stopped when the MSTP1 bit is set to 1. When the clock supply is stopped, RTC registers cannot be accessed but the counters continue to operate.

Bit 1: MSTP1	Description	
0	RTC operates	(Initial value)
1	RTC clock supply is stopped	

**Bit 0—Module Stop 0 (MSTP0):** Specifies stopping of the clock supply to serial communication interface channel 1 (SCI) among the on-chip peripheral modules. The clock supply to the SCI is stopped when the MSTP0 bit is set to 1.

Bit 0: MSTP0	Description	
0	SCI operates	(Initial value)
1	SCI clock supply is stopped	



### 9.2.2 Peripheral Module Pin High Impedance Control

When bit 6 in the standby control register (STBCR) is set to 1, peripheral module related pins go to the high-impedance state in standby mode.

- Relevant Pins

<b>SCI related pins</b>	MD0/SCK	MD1/TXD2
	MD7/TXD	MD8/RTS2
	CTS2	
<b>DMA related pins</b>	DACK0	DRAK0
	DACK1	DRAK1

- Other Information

High impedance control is not performed when the above pins are used as port output pins.

### 9.2.3 Peripheral Module Pin Pull-Up Control

When bit 5 in the standby control register (STBCR) is cleared to 0, peripheral module related pins are pulled up when in the input or high-impedance state.

- Relevant Pins

<b>SCI related pins</b>	MD0/SCK	MD1/TXD2	MD2/RXD2
	MD7/TXD	MD8/RTS2	SCK2/MRESET
	RXD	CTS2	
<b>DMA related pins</b>	DREQ0	DACK0	DRAK0
	DREQ1	DACK1	DRAK1
<b>TMU related pin</b>	TCLK		

9.2.4 Standby Control Register 2 (STBCR2)

Standby control register 2 (STBCR2) is an 8-bit readable/writable register that specifies the sleep mode and deep sleep mode transition conditions. It is initialized to H'00 by a power-on reset via the RESET pin or due to watchdog timer overflow.

Bit:	7	6	5	4	3	2	1	0
	DSL <sub>P</sub>	—	—	—	—	—	—	—
Initial value:	0	0	0	0	0	0	0	0
R/W:	R/W	R	R	R	R	R	R	R

Bit 7—Deep Sleep (DSL<sub>P</sub>): Specifies a transition to deep sleep mode

Bit 7: DSL <sub>P</sub>	Description
0	Transition to sleep mode or standby mode on execution of SLEEP instruction, according to setting of STBY bit in STBCR register
1	Transition to deep sleep mode on execution of SLEEP instruction*

Note: \*When the STBY bit in the STBCR register is 0

Bits 6 to 0—Reserved: Only 0 should only be written to these bits; operation cannot be guaranteed if 1 is written. These bits are always read as 0.

9.3 Sleep Mode

9.3.1 Transition to Sleep Mode

If a SLEEP instruction is executed when the STBY bit in STBCR is cleared to 0, the chip switches from the program execution state to sleep mode. After execution of the SLEEP instruction, the CPU halts but its register contents are retained. The on-chip peripheral modules continue to operate, and the clock continues to be output from the CKIO pin.

In sleep mode, a high-level signal is output at the STATUS1 pin, and a low-level signal at the STATUS0 pin.

### 9.3.2 Exit from Sleep Mode

Sleep mode is exited by means of an interrupt (NMI, IRL, or on-chip peripheral module) or a reset. In sleep mode, interrupts are accepted even if the BL bit in the SR register is 1. If necessary, SPC and SSR should be saved to the stack before executing the SLEEP instruction.

**Exit by Interrupt:** When an NMI, IRL, or on-chip peripheral module interrupt is generated, sleep mode is exited and interrupt exception handling is executed. The code corresponding to the interrupt source is set in the INTEVT register.

**Exit by Reset:** Sleep mode is exited by means of a power-on or manual reset via the RESET pin, or a power-on or manual reset executed when the watchdog timer overflows.

## 9.4 Deep Sleep Mode

### 9.4.1 Transition to Deep Sleep Mode

If a SLEEP instruction is executed when the STBY bit in STBCR is cleared to 0 and the DSLP bit in STBCR2 is set to 1, the chip switches from the program execution state to deep sleep mode. After execution of the SLEEP instruction, the CPU halts but its register contents are retained. Except for the DMAC, on-chip peripheral modules continue to operate, and the clock continues to be output from the CKIO pin.

In deep sleep mode, a high-level signal is output at the STATUS1 pin, and a low-level signal at the STATUS0 pin.

### 9.4.2 Exit from Deep Sleep Mode

As with sleep mode, deep sleep mode is exited by means of an interrupt (NMI, IRL, or on-chip peripheral module) or a reset.

## 9.5 Standby Mode

### 9.5.1 Transition to Standby Mode

If a SLEEP instruction is executed when the STBY bit in STBCR is set to 1, the chip switches from the program execution state to standby mode. In standby mode, the on-chip peripheral modules halt as well as the CPU. Clock output from the CKIO pin is also stopped.

The CPU and cache register contents are retained. Some on-chip peripheral module registers are initialized. The state of the peripheral module registers in standby mode is shown in table 9.3.

**Table 9.3 State of Registers in Standby Mode**

Module	Initialized Registers	Registers That Retain Their Contents
Interrupt controller	—	All registers
User break controller	—	All registers
Bus state controller	—	All registers
On-chip oscillation circuits	—	All registers
Timer unit	TSTR register*	All registers except TSTR
Realtime clock	—	All registers
Direct memory access controller	—	All registers
Serial communication interface	See Appendix A, Address List	See Appendix A, Address List

---

**Note:** \*Not initialized when the realtime clock (RTC) is in use (see section 12, Timer Unit (TMU), in the Hardware Manual).

---

---

**Note:** DMA transfer should be terminated before making a transition to standby mode. Transfer results are not guaranteed if standby mode is entered during transfer.

---

The procedure for a transition to standby mode is shown below.

- 1) Clear the TME bit in the WDT timer control register (WTCSR) to 0, and stop the WDT. Set the initial value for the up-count in the WDT timer counter (WTCNT), and set the clock to be used for the up-count in bits CKS2–CKS0 in the WTCSR register.
- 2) Set the STBY bit in the STBCR register to 1, then execute a SLEEP instruction.
- 3) When standby mode is entered and the chip's internal clock stops, a low-level signal is output at the STATUS1 pin, and a high-level signal at the STATUS0 pin.

### 9.5.2 Exit from Standby Mode

Standby mode is exited by means of an interrupt (NMI, IRL, or on-chip peripheral module) or a reset via the RESET pin.

**Exit by Interrupt:** A hot start can be performed by means of the on-chip WDT. When an NMI, IRL\*1, or on-chip peripheral module (except interval timer)\*2 interrupt is detected, the WDT starts counting. After the count overflows, clocks are supplied to the entire chip, standby mode is exited, and the STATUS1 and STATUS0 pins both go low. Interrupt exception handling is then executed, and the code corresponding to the interrupt source is set in the INTEVT register. In standby mode, interrupts are accepted even if the BL bit in the SR register is 1, and so, if necessary, SPC and SSR should be saved to the stack before executing the SLEEP instruction.

The phase of the CKIO pin clock output may be unstable immediately after an interrupt is detected, until standby mode is exited.

---

**Note:** Only when the RTC clock (32.768 kHz) is operating (see section 19.2.2, IRL Interrupts, in the Hardware Manual), standby mode can be exited by means of IRL3–IRL0 (when the IRL3–IRL0 level is higher than the SR register I3–I0 mask level).  
Standby mode can be exited by means of an RTC interrupt.

---

**Exit by Reset:** Standby mode is exited by means of a reset (power-on or manual) via the RESET pin. The RESET pin should be held low until clock oscillation stabilizes. The internal clock continues to be output at the CKIO pin.

### 9.5.3 Clock Pause Function

In standby mode, it is possible to stop or change the frequency of the clock input from the EXTAL pin. This function is used as follows.

- 1) Enter standby mode following the transition procedure described above.
- 2) When standby mode is entered and the chip's internal clock stops, a low-level signal is output at the STATUS1 pin, and a high-level signal at the STATUS0 pin.
- 3) The input clock is stopped, or its frequency changed, after the STATUS1 pin goes low and the STATUS0 pin high.
- 4) When the frequency is changed, input an NMI or IRL interrupt after the change. When the clock is stopped, input an NMI or IRL interrupt after applying the clock.
- 5) After the time set in the WDT, clock supply begins inside the chip, the STATUS1 and STATUS0 pins both go low, and operation is resumed from interrupt exception handling.

## 9.6 Module Standby Function

### 9.6.1 Transition to Module Standby Function

Setting the MSTP4–MSTP0 bits in the standby control register to 1 enables the clock supply to the corresponding on-chip peripheral modules to be halted. Use of this function allows power consumption in sleep mode to be further reduced.

In the module standby state, the on-chip peripheral module external pins retain their states prior to halting of the modules, and most registers retain their states prior to halting of the modules.

Bit		Description
MSTP4	0	DMAC operates
	1	Clock supplied to DMAC is stopped
MSTP3	0	SCIF operates
	1	Clock supplied to SCIF is stopped
MSTP2	0	TMU operates
	1	Clock supplied to TMU is stopped, and register is initialized*1
MSTP1	0	RTC operates
	1	Clock supplied to RTC is stopped*2
MSTP0	0	SCI operates
	1	Clock supplied to SCI is stopped

---

**Note:** The register initialized is the same as in standby mode, but initialization is not performed if the RTC clock is not in use (see section 12, Timer Unit (TMU), in the Hardware Manual).  
The counter operates when the START bit in RCR2 is 1 (see section 11, Realtime Clock (RTC), in the Hardware Manual).

---

### 9.6.2 Exit from Module Standby Function

The module standby function is exited by clearing the MSTP4–MSTP0 bits to 0, or by a power-on reset via the RESET pin or a power-on reset caused by watchdog timer overflow.



# 10. *Instruction Descriptions*

---

Instructions are listed in this section in alphabetical order. The following format is used for the instruction descriptions.

Instruction Name		Full Name		Instruction Type	
Function				(Indication of delayed branch instruction or interrupt-disabling instruction)	
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
– The assembler input format is shown. imm and disp are numeric values, expressions, or symbols.	– Summarizes the operation of the instruction.	– Shown in MSB ↔ LSB order.	– The no-wait value is shown.	– Shows the T bit value after execution of the instruction.	

## Description

Describes the operation of the instruction.

## Notes

Identifies points to be noted when using the instruction.

### **Operation**

Shows the operation in C. This is given as reference material to help understand the operation of the instruction. Use of the following resources is assumed.

char	8-bit integer
short	16-bit integer
int	32-bit integer
long	64-bit integer
float	single-precision floating point number(32 bits)
double	double-precision floating point number(64 bits)

**These are data types.**

```
unsigned char Read_Byte(unsigned long Addr);
unsigned short Read_Word(unsigned long Addr);
unsigned long Read_Long(unsigned long Addr);
```

**These reflect the respective sizes of address Addr. A word read from other than a 2n address, or a longword read from other than a 4n address, will be detected as an address error.**

```
unsigned char Write_Byte(unsigned long Addr, unsigned long Data);
unsigned short Write_Word(unsigned long Addr, unsigned long Data);
unsigned long Write_Long(unsigned long Addr, unsigned long Data);
```

**These write data Data to address Addr, using the respective sizes. A word write to other than a 2n address, or a longword write to other than a 4n address, will be detected as an address error.**

```
Delay_Slot(unsigned long Addr);
```

**Shifts to execution of the slot instruction at address (Addr).**

```
unsigned long R[16];
unsigned long SR,GBR,VBR;
unsigned long MACH,MACL,PR;
unsigned long PC;
```

#### **Registers**

```
struct SR0 {
    unsigned long dummy0:22;
    unsigned long M0:1;
    unsigned long Q0:1;
    unsigned long I0:4;
    unsigned long dummy1:2;
    unsigned long S0:1;
    unsigned long T0:1;
};
```

#### **SR structure definitions**

```
define M ((* (struct SR0 *)(&SR)).M0)
#define Q ((* (struct SR0 *)(&SR)).Q0)
#define S ((* (struct SR0 *)(&SR)).S0)
#define T ((* (struct SR0 *)(&SR)).T0)
```

#### **Definitions of bits in SR**

```
Error( char *er );
```

#### **Error display function**



These are floating-point number definition statements.

```
#define PZERO      0
#define NZERO      1
#define DENORM     2
#define NORM       3
#define PINF       4
#define NINF       5
#define qNaN       6
#define sNaN       7
#define EQ         0
#define GT         1
#define LT         2
#define UO         3
#define INVALID    4
#define FADD       0
#define FSUB       1

#define CAUSE      0x0003f000 /* FPSCR(bit17-12) */
#define SET_E      0x00020000 /* FPSCR(bit17) */
#define SET_V      0x00010040 /* FPSCR(bit16,6) */
#define SET_Z      0x00008020 /* FPSCR(bit15,5) */
#define SET_O      0x00004010 /* FPSCR(bit14,4) */
#define SET_U      0x00002008 /* FPSCR(bit13,3) */
#define SET_I      0x00001004 /* FPSCR(bit12,2) */
#define ENABLE_VOUI 0x00000b80 /* FPSCR(bit11,9-7) */
#define ENABLE_V    0x00000800 /* FPSCR(bit11) */
#define ENABLE_Z    0x00000400 /* FPSCR(bit10) */
#define ENABLE_OUI  0x00000380 /* FPSCR(bit9-7) */
#define ENABLE_I    0x00000080 /* FPSCR(bit7) */
#define FLAG        0x0000007C /* FPSCR(bit6-2) */

#define FPSCR_FR    FPSCR>>21&1
#define FPSCR_PR    FPSCR>>19&1
#define FPSCR_DN    FPSCR>>18&1
#define FPSCR_I     FPSCR>>12&1
#define FPSCR_RM    FPSCR&1
#define FR_HEX      frf.l[ FPSCR_FR]
#define FR          frf.f[ FPSCR_FR]
#define DR          frf.d[ FPSCR_FR]
#define XF_HEX      frf.l[~FPSCR_FR]
#define XF          frf.f[~FPSCR_FR]
#define XD          frf.d[~FPSCR_FR]

union {
    int  l[2][16];
    float f[2][16];
    double d[2][8];
} frf;
int FPSCR;
```

```
int sign_of(int n)
{
    return(FR_HEX[n]>>31);
}
int data_type_of(int n)
int abs;
abs = FR_HEX[n] & 0x7fffffff;
if(FPSCR_PR == 0) { /* Single-precision */
    if(abs < 0x00800000){
        if((FPSCR_DN == 1) || (abs == 0x00000000)){
            if(sign_of(n) == 0) return(PZERO);
            else return(NZERO);
        }
        else return(DENORM);
    }
    else if(abs < 0x7f800000) return(NORM);
    else if(abs == 0x7f800000) {
        if(sign_of(n) == 0) return(PINF);
        else return(NINF);
    }
    else if(abs < 0x7fc00000) return(qNaN);
    else return(sNaN);
}
else { /* Double-precision */
    if(abs < 0x00100000){
        if((FPSCR_DN == 1) || (abs == 0x00000000)){
            if(sign_of(n) == 0) return(PZERO);
            else return(NZERO);
        }
        else return(DENORM);
    }
    else if(abs < 0x7ff00000) return(NORM);
    else if((abs == 0x7ff00000) &&
        (FR_HEX[n+1] == 0x00000000)) {
        if(sign_of(n) == 0) return(PINF);
        else return(NINF);
    }
    else if(abs < 0x7ff80000) return(qNaN);
    else return(sNaN);
}
}
void register_copy(int m,n)
{
    FR[n] = FR[m];
    if(FPSCR_PR == 1) FR[n+1] = FR[m+1];
}
```

```
void normal_faddsub(int m,n,type)
{
union {
    float f;
    int l;
} dstf,srcf;
union {
    double d;
    int l[2];
} dstd,srcd;
union {
    /* "long double" format: */
    int double x; /* 1-bit sign */
    int l[4]; /* 15-bit exponent */
} dstx; /* 112-bit mantissa */
if(FPSCR_PR == 0) {
    if(type == FADD) srcf.f = FR[m];
    else srcf.f = -FR[m];
    dstd.d = FR[n]; /* Conversion from single-precision to double-precision */
    dstd.d += srcf.f;
    if(((dstd.d == FR[n]) && (srcf.f != 0.0)) ||
        ((dstd.d == srcf.f) && (FR[n] != 0.0))) {
        if(sign_of(m)^ sign_of(n)) {
            dstd.l[1] -= 1;
            if(dstd.l[1] == 0xffffffff) dstd.l[0] -= 1;
        }
    }
    if(dstd.l[1] & 0x1fffffff) set_I();
    dstf.f += srcf.f; /* Round to nearest */
    if(FPSCR_RM == 1) {
        dstd.l[1] &= 0xe0000000; /* Round to zero */
        dstf.f = dstd.d;
    }
    check_single_exception(&FR[n],dstf.f);
} else {
    if(type == FADD) srcd.d = DR[m>>1];
    else srcd.d = -DR[m>>1];
    dstx.x = DR[n>>1];
    /* Conversion from double-precision to extended double-precision */
    dstx.x += srcd.d;
    if(((dstx.x == DR[n>>1]) && (srcd.d != 0.0)) ||
        ((dstx.x == srcd.d) && (DR[n>>1] != 0.0)) ) {
        set_I();
        if(sign_of(m)^ sign_of(n)) {
            dstx.l[3] -= 1;
            if(dstx.l[3] == 0xffffffff) dstx.l[2] -= 1;
            if(dstx.l[2] == 0xffffffff) dstx.l[1] -= 1;
            if(dstx.l[1] == 0xffffffff) dstx.l[0] -= 1;
        }
    }
}
```

---

```
        if((dstx.l[2] & 0xffffffff) || dstx.l[3]) set_I();
        dst.d += srcd.d; /* Round to nearest */
        if(FPSCR_RM == 1) {
            dstx.l[2] &= 0xf0000000; /* Round to zero */
            dstx.l[3] = 0x00000000;
            dst.d = dstx.x;
        }
        check_double_exception(&DR[n>>1], dst.d);
    }
}

void normal_fmuls(int m,n)
{
    union {
        float f;
        int l;
    } tmpf;

    union {
        double d;
        int l[2];
    } tmpd;
    union {
        int double x;
        int l[4];
    } tmpx;

    if(FPSCR_PR == 0) {
        tmpd.d = FR[n]; /* Single-precision to double-precision */
        tmpd.d *= FR[m]; /* Precise creation */
        tmpf.f = FR[m]; /* Round to nearest */
        if(tmpf.f != tmpd.d) set_I();
        if((tmpf.f > tmpd.d) && (SPSCR_RM == 1)) {
            tmpf.l -= 1; /* Round to zero */
        }
        check_single_exception(&FR[n], tmpf.f);
    } else {
        tmpx.x = DR[n>>1]; /* Single-precision to double-precision */
        tmpx.x *= DR[m>>1]; /* Precise creation */
        tmpd.d = DR[m>>1]; /* Round to nearest */
        if(tmpd.d != tmpx.x) set_I();
        if(tmpd.d > tmpx.x) && (SPSCR_RM == 1)) {
            tmpd.l[1] -= 1; /* Round to zero */
            if(tmpd.l[1] == 0xffffffff) tmpd.l[0] -= 1;
        }
        check_double_exception(&DR[n>>1], tmpd.d);
    }
}
```

```
void fipr(int m,n)
{
union {
    double d;
    int l[2];
}    mlt[4];
float dstf;
    if((data_type_of(m) == sNaN) || (data_type_of(n) == sNaN) ||
        (data_type_of(m+1) == sNaN) || (data_type_of(n+1) == sNaN) ||
        (data_type_of(m+2) == sNaN) || (data_type_of(n+2) == sNaN) ||
        (data_type_of(m+3) == sNaN) || (data_type_of(n+3) == sNaN) ||
        (check_product_invalid(m,n)) ||
        (check_product_invalid(m+1,n+1)) ||
        (check_product_invalid(m+2,n+2)) ||
        (check_product_invalid(m+3,n+3)) )    invalid(n+3);
    else if((data_type_of(m) == qNaN) || (data_type_of(n) == qNaN) ||
        (data_type_of(m+1) == qNaN) || (data_type_of(n+1) == qNaN) ||
        (data_type_of(m+2) == qNaN) || (data_type_of(n+2) == qNaN) ||
        (data_type_of(m+3) == qNaN) || (data_type_of(n+3) == qNaN)) qnan(n+3);
    else if (check_positive_infinity() &&
        (check_negative_infinity()          invalid(n+3);
    else if (check_positive_infinity()          inf(n+3,0);
    else if (check_negative_infinity()          inf(n+3,1);
    else {
        for(i=0;i<4;i++) {
            /* If FPSCR_DN == 1, zeroize */
            if      (data_type_of(m+i) == PZERO)  FR[m+i] = +0.0;
            else if (data_type_of(m+i) == NZERO)  FR[m+i] = -0.0;
            if      (data_type_of(n+i) == PZERO)  FR[n+i] = +0.0;
            else if (data_type_of(n+i) == NZERO)  FR[n+i] = -0.0;
            mlt[i].d = FR[m+i];
                    mlt[i].d *= FR[n+i];

            /* To be precise, with FIPR, the lower 18 bits are discarded; therefore, this
description
            is simplified, and differs from the hardware. */
            mlt[i].l[1] &= 0xff000000;
            mlt[i].l[1] |= 0x00800000;
        }
        mlt[0].d += mlt[1].d + mlt[2].d + mlt[3].d;
        mlt[0].l[1] &= 0xff800000;
        dstf = mlt[0].d;
        set_I();
        check_single_exception(&FR[n+3],dstf);
    }
}
```

```
void check_single_exception(float *dst,result)
{
union {
    float f;
    int l;
} tmp;
float abs;
if(result < 0.0) tmp.l = 0xff800000; /* - infinity */
else tmp.l = 0x7f800000; /* + infinity */
if(result == tmp.f) {
    set_O();
    if(FPSCR_RM == 1) {
        tmp.l -= 1; /* Maximum value of normalized number */
        result = tmp.f;
    }
}
if(result < 0.0) abs = -result;
else abs = result;
tmp.l = 0x00800000; /* Minimum value of normalized number */
if(abs < tmp.f) {
    if((FPSCR_DN == 1) && (abs != 0.0)) {
        set_I();
        if(result < 0.0) result = -0.0; /* Zeroize denormalized number */
        else result = 0.0;
    }
    if(FPSCR_I == 1) set_U();
}
if(FPSCR & ENABLE_OUI) fpu_exception_trap();
else *dst = result;
}

void check_double_exception(double *dst,result)
{
union {
    double d;
    int l[2];
} tmp;
double abs;
if(result < 0.0) tmp.l[0] = 0xffff00000; /* - infinity */
else tmp.l[0] = 0x7ff000000; /* + infinity */
tmp.l[1] = 0x000000000;
if(result == tmp.d)
    set_O();
if(FPSCR_RM == 1) {
    tmp.l[0] -= 1;
    tmp.l[1] = 0xffffffff;
    result = tmp.d; /* Maximum value of normalized number */
}
}
```

```
    if(result < 0.0) abs = -result;
    else             abs =  result;
    tmp.l[0] = 0x00100000; /* Minimum value of normalized number */
    tmp.l[1] = 0x00000000;
    if(abs < tmp.d) {
        if((FPSCR_DN == 1) && (abs != 0.0)) {
            set_I();
            if(result < 0.0) result = -0.0;
            /* Zeroize denormalized number */
            else             result = 0.0;
        }
        if(FPSCR_I == 1) set_U();
    }
    if(FPSCR & ENABLE_OUI) fpu_exception_trap();
    else                    *dst = result;
}

int check_product_invalid(int m,n)
{
    return(check_product_infinity(m,n) &&
        ((data_type_of(m) == PZERO) || (data_type_of(n) == PZERO) ||
        (data_type_of(m) == NZERO) || (data_type_of(n) == NZERO)));
}

int check_product_infinity(int m,n)
{
    return((data_type_of(m) == PINF) || (data_type_of(n) == PINF) ||
        (data_type_of(m) == NINF) || (data_type_of(n) == NINF));
}

int check_positive_infinity(int m,n)
{
    return(((check_product_infinity(m,n) && (~sign_of(m)^ sign_of(n))) ||
        ((check_product_infinity(m+1,n+1) && (~sign_of(m+1)^ sign_of(n+1))) ||
        ((check_product_infinity(m+2,n+2) && (~sign_of(m+2)^ sign_of(n+2))) ||
        ((check_product_infinity(m+3,n+3) && (~sign_of(m+3)^ sign_of(n+3)))));
}

int check_negative_infinity(int m,n)
{
    return(((check_product_infinity(m,n) && (sign_of(m)^ sign_of(n))) ||
        ((check_product_infinity(m+1,n+1) && (sign_of(m+1)^ sign_of(n+1))) ||
        ((check_product_infinity(m+2,n+2) && (sign_of(m+2)^ sign_of(n+2))) ||
        ((check_product_infinity(m+3,n+3) && (sign_of(m+3)^ sign_of(n+3)))));
}

void clear_cause () {FPSCR &= ~CAUSE;}
void set_E() {FPSCR |= SET_E;}
void set_V() {FPSCR |= SET_V;}
void set_Z() {FPSCR |= SET_Z;}
void set_O() {FPSCR |= SET_O;}
void set_U() {FPSCR |= SET_U;}
void set_I() {FPSCR |= SET_I;}
void invalid(int n)
```

```
{
    set_V();
    if((FPSCR & ENABLE_V) == 0 qnan(n);
    else    fpu_exception_trap();
}

void dz(int n,sign)
{
    set_Z();
    if((FPSCR & ENABLE_Z) == 0 inf(n,sign);
    else    fpu_exception_trap();
}

void zero(int n,sign)
{
    if(sign == 0)    FR_HEX [n]    = 0x00000000;
    else
                    FR_HEX [n]    = 0x80000000;
    if (FPSCR_PR==1) FR_HEX [n+1] = 0x00000000;
}

void inf(int n,sign) {
    if (FPSCR_PR==0) {
        if(sign == 0) FR_HEX [n]    = 0x7f800000;
        else          FR_HEX [n]    = 0xff800000;
    } else {
        if(sign == 0) FR_HEX [n]    = 0x7ff00000;
        else          FR_HEX [n]    = 0xfff00000;
        FR_HEX [n+1] = 0x00000000;
    }
}

void qnan(int n)
{
    if (FPSCR_PR==0) FR[n]    = 0x7fbfffff;
    else {
        FR[n]    = 0x7ff7ffff;
        FR[n+1] = 0xffffffff;
    }
}
```



## Example

An example is shown using assembler mnemonics, indicating the states before and after execution of the instruction.

Italics (e.g., *.align*) indicate an assembler control instruction. The meaning of the assembler control instructions is given below. For details, refer to the Cross-Assembler User's Manual.

<i>.org</i>	Location counter setting
<i>.data.w</i>	Word integer data allocation
<i>.data.l</i>	Longword integer data allocation
<i>.sdata</i>	String data allocation
<i>.align 2</i>	2-byte boundary alignment
<i>.align 4</i>	4-byte boundary alignment
<i>.align 32</i>	32-byte boundary alignment
<i>.arepeat 16</i>	16-times repeat expansion
<i>.arepeat 32</i>	32-times repeat expansion
<i>.aendr</i>	Count-specification repeat expansion end

**Note:** SH Series cross-assembler version 1.0 does not support conditional assembler functions

10.1	ADD	ADD binary	Arithmetic Instruction	
	Binary Addition			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ADD Rm,Rn	Rn+Rm → Rn	0011nnnnmmmm1100	1	—
ADD #imm,Rn	Rn+imm → Rn	0111nnnniiiiiii	1	—

## Description

This instruction adds together the contents of general registers Rn and Rm and stores the result in Rn.

8-bit immediate data can also be added to the contents of general register Rn.

8-bit immediate data is sign-extended to 32 bits, allowing use in decrement operations.

Operation

```
ADD(long m, long n) /* ADD Rm,Rn */
{
    R[n]+=R[m];
    PC+=2;
}

ADDI(long i, long n) /* ADD #imm,Rn */
{
    if ((i&0x80)==0)
        R[n]+=(0x000000FF & (long)i);
    else R[n]+=(0xFFFFF00 | (long)i);
    PC+=2;
}
```

Example

```
ADD  R0,R1      ;Before execution  R0 = H'7FFFFFFF, R1 = H'00000001
                        ;After execution  R1 = H'80000000
ADD  #H'01,R2   ;Before execution  R2 = H'00000000
                        ;After execution  R2 = H'00000001
ADD  #H'FE,R3   ;Before execution  R3 = H'00000001
                        ;After execution  R3 = H'FFFFFFF
```

10.2	ADDC	ADD with Carry	Arithmetic Instruction	
	Binary Addition with Carry			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ADDC Rm,Rn	Rn+Rm+T → Rn, carry → T	0011nnnnmmmm1110	1	Carry

Description

This instruction adds together the contents of general registers Rn and Rm and the T bit, and stores the result in Rn. A carry resulting from the operation is reflected in the T bit. This instruction is used for additions exceeding 32 bits.

## Operation

```

ADDC(long m, long n)    /* ADDC Rm,Rn */
{
    unsigned long tmp0,tmp1;

    tmp1=R[n]+R[m];
    tmp0=R[n];
    R[n]=tmp1+T;
    if (tmp0>tmp1) T=1;
    else T=0;
    if (tmp1>R[n]) T=1;
    PC+=2;
}

```

## Example

CLRT	;R0:R1(64 bits) + R2:R3(64 bits) = R0:R1(64 bits)	
ADDC R3,R1	;Before execution	T = 0, R1 = H'00000001, R3 = H'FFFFFFFF
	;After execution	T = 1, R1 = H'00000000
ADDC R2,R0	;Before execution	T = 1, R0 = H'00000000, R2 = H'00000000
	;After execution	T = 0, R0 = H'00000001

10.3	ADDV	ADD with (V flag) overflow check	Arithmetic Instruction	
	Binary Addition with Overflow Check			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ADDV Rm,Rn	Rn+Rm → Rn, overflow → T	0011nnnnmmmm1111	1	Overflow

## Description

This instruction adds together the contents of general registers Rn and Rm and stores the result in Rn. If overflow occurs, the T bit is set.

Operation

```
ADDV(long m, long n)    /* ADDV Rm,Rn */
{
    long dest,src,ans;

    if ((long)R[n]>=0) dest=0;
    else dest=1;
    if ((long)R[m]>=0) src=0;
    else src=1;
    src+=dest;
    R[n]+=R[m];
    if ((long)R[n]>=0) ans=0;
    else ans=1;
    ans+=dest;
    if (src==0 || src==2) {
        if (ans==1) T=1;
        else T=0;
    }
    else T=0;
    PC+=2;
}
```

Example

```
ADDV  R0,R1      ;Before execution    R0 = H'00000001, R1 = H'7FFFFFFE, T=0
                        ;After execution R1 = H'7FFFFFFF, T=0
ADDV  R0,R1      ;Before execution    R0 = H'00000002, R1 = H'7FFFFFFE, T=0
                        ;After execution R1 = H'80000000, T=1
```

10.4	AND	AND logical	Logical Instruction		
	Logical AND				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
AND	Rm,Rn	Rm & Rm → Rn	0010nnnnmmmm1001	1	—
AND	#imm,R0	R0 & imm → R0	11001001iiiiiii	1	—
AND.B	#imm,@(R0,GBR)	(R0+GBR) & imm → (R0+GBR)	11001101iiiiiii	4	—

Description

This instruction ANDs the contents of general registers Rn and Rm and stores the result in Rn.

This instruction can be used to AND general register R0 contents with zero-extended 8-bit immediate data, or, in indexed GBR indirect addressing mode, to AND 8-bit memory with 8-bit immediate data.

## Notes

With AND #imm,R0, the upper 24 bits of R0 are always cleared as a result of the operation.

## Operation

```

AND(long m, long n)    /* AND Rm,Rn */
{
    R[n]&=R[m];
    PC+=2;
}

ANDI(long i)           /* AND #imm,R0 */
{
    R[0]&=(0x000000FF & (long)i);
    PC+=2;
}

ANDM(long i)           /* AND.B #imm,@(R0,GBR) */
{
    long temp;

    temp=(long)Read_Byte(GBR+R[0]);
    temp&=(0x000000FF & (long)i);
    Write_Byte(GBR+R[0],temp);
    PC+=2;
}

```

## Example

AND	R0,R1	;Before execution	R0 = H'AAAAAAA, R1=H'55555555
		;After execution	R1 = H'00000000
AND	#H'0F,R0	;Before execution	R0 = H'FFFFFFF
		;After execution	R0 = H'0000000F
AND.B	#H'80,@(R0,GBR)	;Before execution	@(R0,GBR) = H'A5
		;After execution	@(R0,GBR) = H'80

10.5	BF	Branch if False	Branch Instruction		
	Conditional Branch				
Format	Summary of Operation		Instruction Code	Execution States	T Bit
BF label	If T = 0 PC + 4 + disp x 2 → PC If T = 1, nop		10001011ddddddd	1	—

Description

This is a conditional branch instruction that references the T bit. The branch is taken if T = 0, and not taken if T = 1. The branch destination is address (PC + 4 + displacement x 2). The PC source value is the BF instruction address. As the 8-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -256 to +254 bytes from the BF instruction.

Notes

If the branch destination cannot be reached, the branch must be handled by using BF in combination with a BRA or JMP instruction, for example.

Operation

```
BF(int d)      /* BF disp */
{
    int disp;

    if ((d&0x80)==0)
        disp=(0x000000FF & d);
    else    disp=(0xFFFFFFFF00 | d);
    if (T==0)
        PC=PC+4+(disp<<1);
    else    PC+=2;
}
```

Example

```
CLRT          ;Normally T = 0
BT   TRGET_T   ;T = 0, so branch is not taken.
BF   TRGET_F   ;T = 0, so branch to TRGET_F.
NOP          ;
NOP          ;
TRGET_F:      ;← BF instruction branch destination
```

10.6	BF/S	Branch if False with delay Slot		Branch Instruction	
	Conditional Branch with Delay			Delayed Branch Instruction	
Format	Summary of Operation		Instruction Code	Execution States	T Bit
BF/S label	If T = 0PC + 4 + disp x 2 → PCIf T = 1, nop		10001111dddddddd	1	—

## Description

This is a delayed conditional branch instruction that references the T bit. If T = 1, the next instruction is executed and the branch is not taken. If T = 0, the branch is taken after execution of the next instruction.

The branch destination is address (PC + 4 + displacement  $\times$  2). The PC source value is the BF/S instruction address. As the 8-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -256 to +254 bytes from the BF/S instruction.

## Notes

As this is a delayed branch instruction, when the branch condition is satisfied, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction.

If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

If this instruction is located in the delay slot immediately following a delayed branch instruction, it is identified as a slot illegal instruction.

If the branch destination cannot be reached, the branch must be handled by using BF/S in combination with a BF, BRA, or JMP instruction, for example.

## Operation

```
BFS(int d)    /* BFS disp */
{
    int disp;
    unsigned int temp;

    temp=PC;
    if ((d&0x80)==0)
        disp=(0x000000FF & d);
    else    disp=(0xFFFFF00 | d);
    if (T==0)
        PC=PC+4+(disp<<1);
    else PC+=4;
    Delay_Slot(temp+2);
}
```

## Example

```
CLRT                                ;Normally T = 0
BT/S  TRGET_T                       ;T = 0, so branch is not taken.
NOP                                  ;
BF/S  TRGET_F                       ;T = 0, so branch to TRGET.
ADD   R0,R1                         ;Executed before branch.
NOP                                  ;
TRGET_F:                            ;← BF/S instruction branch destination
```

10.7	BRA	BRAnch	Branch Instruction	
	Unconditional Branch		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
BRA label	PC+4+disp x 2 → PC	1010ddddddddddd	1	—

Description

This is an unconditional branch instruction. The branch destination is address (PC + 4 + displacement ¥ 2). The PC source value is the BRA instruction address. As the 12-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -4096 to +4094 bytes from the BRA instruction. If the branch destination cannot be reached, this branch can be performed with a JMP instruction.

Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

Operation

```
BRA(int d)    /* BRA disp */
{
    int disp;
    unsigned int temp;

    temp=PC;
    if ((d&0x800)==0)
        disp=(0x00000FFF & d);
    else    disp=(0xFFFFF000 | d);
    PC=PC+4+(disp<<1);
    Delay_Slot(temp+2);
}
```

Example

```
BRA    TRGET          ;Branch to TRGET.
ADD    R0,R1          ;ADD executed before branch.
NOP
TRGET:                ;← BRA instruction branch destination
```



10.8	BRAF	BRAnch Far	Branch Instruction	
	Unconditional Branch		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
BRAF Rn	PC+4+Rn → PC	0000nnnn00100011	2	—

## Description

This is an unconditional branch instruction. The branch destination is address (PC + 4 + Rn). The branch destination address is the result of adding 4 plus the 32-bit contents of general register Rn to PC.

## Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

## Operation

```

BRAF(int n)    /* BRAF Rn */
{
    unsigned int temp;

    temp=PC;
    PC=PC+4+R[n];
    Delay_Slot(temp+2);
}

```

## Example

```

MOV.L #(TRGET-BRAF_PC),R0;Set displacement.
BRAF  R0                    ;Branch to TRGET.
ADD   R0,R1                 ;DD executed before branch.
BRAF_PC:                    ;
NOP
TRGET:                      ;← BRAF instruction branch destination

```

10.9	BSR	Branch to SubRoutine	Branch Instruction	
	Branch to Subroutine Procedure		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
BSR label	PC+4 → PR, PC+4+dispx2 → PC	1011ddddddddddd	1	—

Description

This instruction branches to address (PC + 4 + displacement ¥ 2), and stores address (PC + 4) in PR. The PC source value is the BSR instruction address. As the 12-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -4096 to +4094 bytes from the BSR instruction. If the branch destination cannot be reached, this branch can be performed with a JSR instruction.

Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

Operation

```
BSR(int d)    /* BSR disp */
{
    int disp;
    unsigned int temp;

    temp=PC;
    if ((d&0x800)==0)
        disp=(0x00000FFF & d);
    else disp=(0xFFFFF000 | d);
    PR=PC+4;
    PC=PC+4+(disp<<1);
    Delay_Slot(temp+2);
}
```

Example

```
BSR  TRGET          ;Branch to TRGET.
MOV  R3,R4          ;MOV executed before branch.
ADD  R0,R1          ;Subroutine procedure return destination (contents of PR)
.....
.....
TRGET:              ;← Entry to procedure
MOV  R2,R3          ;
RTS                    ;Return to above ADD instruction.
MOV  #1,R0          ;MOV executed before branch.
```

10.10	BSRF	Branch to SubRoutine Far	Branch Instruction	
	Branch to Subroutine Procedure		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
BSRF Rn	PC+4 → PR, PC+4+Rn → PC	0000nnnn00000011	2	—

## Description

This instruction branches to address (PC + 4 + Rn), and stores address (PC + 4) in PR. The PC source value is the BSRF instruction address. The branch destination address is the result of adding the 32-bit contents of general register Rn to PC + 4.

## Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

## Operation

```
BSRF(int n)      /* BSRF Rn */
{
    unsigned int temp;

    temp=PC;
    PR=PC+4;
    PC=PC+4+R[n];
    Delay_Slot(tmp+2);
}
```

## Example

```
MOV.L  #(TRGET-BSRF_PC),R0    ;Set displacement.
BSRF   R0                    ;Branch to TRGET.
MOV    R3,R4                 ;MOV executed before branch.
BSRF_PC:
ADD    R0,R1                 ;
.....
TRGET:                        ;← Entry to procedure
MOV    R2,R3                 ;
RTS                      ;Return to above ADD instruction.
MOV    #1,R0                 ;MOV executed before branch.
```

10.11	BT	Branch if True		Branch Instruction	
	Conditional Branch				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
BT   label	If T = 1 PC + 4 + disp x 2 → PC If T = 0, nop	10001001dddddddd	1	—	

Description

This is a conditional branch instruction that references the T bit. The branch is taken if T = 1, and not taken if T = 0. The branch destination is address (PC + 4 + displacement x 2). The PC source value is the BT instruction address. As the 8-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -256 to +254 bytes from the BT instruction.

Notes

If the branch destination cannot be reached, the branch must be handled by using BT in combination with a BRA or JMP instruction, for example.

Operation

```
BT(int d)    /* BT disp */
{
    int disp;

    if ((d&0x80)==0)
        disp=(0x000000FF & d);
    else disp=(0xFFFFFFFF00 | d);
    if (T==1)
        PC=PC+4+(disp<<1);
    else PC+=2;
}
```

Example

```
SETT                ;Normally T = 1
BF  TRGET_F          ;T = 1, so branch is not taken.
BT  TRGET_T          ;T = 1, so branch to TRGET_T.
NOP                 ;
NOP                 ;
TRGET_T:            ;← BT instruction branch destination
```

10.12	BT/S	Branch if True with delay Slot	Branch Instruction	
	Conditional Branch with Delay		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
BT/S label	If T = 1 PC + 4 + disp x 2 → PC If T = 0, nop	10001101ddddddd	1	—

## Description

This is a conditional branch instruction that references the T bit. The branch is taken if T = 1, and not taken if T = 0.

The PC source value is the BT/S instruction address. As the 8-bit displacement is multiplied by two after sign-extension, the branch destination can be located in the range from -256 to +254 bytes from the BT/S instruction. If the branch destination cannot be reached, the branch must be handled by using BT/S in combination with a BRA or JMP instruction, for example.

## Notes

As this is a delayed branch instruction, when the branch condition is satisfied, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction.

If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

## Operation

```
BTS(int d)    /* BTS disp */
{
    int disp;
    unsigned temp;

    temp=PC;
    if ((d&0x80)==0)
        disp=(0x000000FF & d);
    else disp=(0xFFFFFFFF00 | d);
    if (T==1)
        PC=PC+4+(disp<<1);
    else PC+=4;
    Delay_Slot(temp+2);
}
```

## Example

```
SETT                ;Normally T = 1
BF/S  TRGET_F        ;T = 1, so branch is not taken.
NOP                 ;
BT/S  TRGET_T        ;T = 1, so branch to TRGET_T.
ADD   R0,R1          ;Executed before branch.
NOP                 ;
TRGET_T:            ;← BT/S instruction branch destination
```

10.13	CLRMAC	CleaR MAC register	System Control Instruction	
	MAC Register Clear			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
CLRMAC	0 → MACH, MACL	0000000000101000	1	—

## Description

This instruction clears the MACH and MACL registers.

## Operation

```
CLRMAC( )    /* CLRMAC */
{
    MACH=0;
    MACL=0;
    PC+=2;
}
```

## Example

```
CLRMAC          ;Clear MAC register to initialize.
MAC.W   @R0+,@R1+ ;Multiply-and-accumulate operation
MAC.W   @R0+,@R1+ ;
```

10.14	CLRS	CleaR S bit	System Control Instruction	
	S Bit Clear			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
CLRS	0 → S	0000000001001000	1	—

## Description

This instruction clears the S bit to 0.

## Operation

```
CLRS( )    /* CLRS */
{
    S=0;
    PC+=2;
}
```

## Example

```
CLRS          ;Before execution S = 1
              ;After execution   S = 0
```

10.15	CLRT	Clear T bit		System Control Instruction	
	T Bit Clear				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
CLRT	0 → T	0000000000001000	1	—	

## Description

This instruction clears the T bit.

## Operation

```
CLRT( )      /* CLRT */
{
    T=0;
    PC+=2;
}
```

## Example

```
CLRT          ;Before execution    T = 1
              ;After execution     T = 0
```

10.16		CMP/cond	CoMPare conditionally	Arithmetic Instruction	
		Compare			
Format		Summary of Operation	Instruction Code	Execution States	T Bit
CMP/EQ	Rm,Rn	If Rn = Rm, 1 → T	0011nnnnmmmm0000	1	Result of comparison
CMP/GE	Rm,Rn	If Rn ≥ Rm, signed, 1 → T	0011nnnnmmmm0011	1	Result of comparison
CMP/GT	Rm,Rn	If Rn > Rm, signed, 1 → T	0011nnnnmmmm0111	1	Result of comparison
CMP/HI	Rm,Rn	If Rn > Rm, unsigned, 1 → T	0011nnnnmmmm0110	1	Result of comparison
CMP/HS	Rm,Rn	If Rn ≥ Rm, unsigned, 1 → T	0011nnnnmmmm0010	1	Result of comparison
CMP/PL	Rn	If Rn > 0, 1 → T	0100nnnn00010101	1	Result of comparison
CMP/PZ	Rn	If Rn ≥ 0, 1 → T	0100nnnn00010001	1	Result of comparison
CMP/STR	Rm,Rn	If any bytes are equal, 1 → T	0010nnnnmmmm1100	1	Result of comparison
CMP/EQ	#imm,R0	If R0 = imm, 1 → T	10001000iiiiiii	1	Result of comparison

## Description

This instruction compares general registers Rn and Rm, and sets the T bit if the specified condition (cond) is true. If the condition is false, the T bit is cleared. The contents of Rn are not changed. Nine conditions can be specified. For the two conditions PZ and PL, Rn is compared with 0.



With the EQ condition, sign-extended 8-bit immediate data can be compared with R0. The contents of R0 are not changed.

Mnemonic		Description
CMP/EQ	Rm,Rn	If $R_n = R_m$ , $T = 1$
CMP/GE	Rm,Rn	If $R_n \geq R_m$ as signed values, $T = 1$
CMP/GT	Rm,Rn	If $R_n > R_m$ as signed values, $T = 1$
CMP/HI	Rm,Rn	If $R_n > R_m$ as unsigned values, $T = 1$
CMP/HS	Rm,Rn	If $R_n \geq R_m$ as unsigned values, $T = 1$
CMP/PL	Rn	If $R_n > 0$ , $T = 1$
CMP/PZ	Rn	If $R_n \geq 0$ , $T = 1$
CMP/STR	Rm,Rn	If any bytes are equal, $T = 1$
CMP/EQ	#imm,R0	If $R0 = \text{imm}$ , $T = 1$

## Operation

```
CMPEQ(long m, long n)    /* CMP_EQ Rm,Rn */
{
    if (R[n]==R[m]) T=1;
    else T=0;
    PC+=2;
}

CMPGE(long m, long n)    /* CMP_GE Rm,Rn */
{
    if ((long)R[n]>=(long)R[m]) T=1;
    else T=0;
    PC+=2;
}

CMPGT(long m, long n)    /* CMP_GT Rm,Rn */
{
    if ((long)R[n]>(long)R[m]) T=1;
    else T=0;
    PC+=2;
}

CMPHI(long m, long n)    /* CMP_HI Rm,Rn */
{
    if ((unsigned long)R[n]>(unsigned long)R[m]) T=1;
    else T=0;
    PC+=2;
}
```

```
CMPHS(long m, long n)    /* CMP_HS Rm,Rn */
{
    if ((unsigned long)R[n]>=(unsigned long)R[m]) T=1;
    else T=0;
    PC+=2;
}

CMPPL(long n)            /* CMP_PL Rn */
{
    if ((long)R[n]>0) T=1;
    else T=0;
    PC+=2;
}

CMPPZ(long n)           /* CMP_PZ Rn */
{
    if ((long)R[n]>=0) T=1;
    else T=0;
    PC+=2;
}

CMPSTR(long m, long n)   /* CMP_STR Rm,Rn */
{
    unsigned long temp;
    long HH,HL,LH,LL;

    temp=R[n]^R[m];
    HH=(temp&0xFF000000)>>24;
    HL=(temp&0x00FF0000)>>16;
    LH=(temp&0x0000FF00)>>8;
    LL=temp&0x000000FF;
    HH=HH&&HL&&LH&&LL;
    if (HH==0) T=1;
    else T=0;
    PC+=2;
}

CMPIM(long i)           /* CMP_EQ #imm,R0 */
{
    long imm;

    if ((i&0x80)==0) imm=(0x000000FF & (long i));
    else imm=(0xFFFFFFFF00 | (long i));
    if (R[0]==imm) T=1;
    else T=0;
    PC+=2;
}
```

## Example

```

CMP/GE  R0,R1      ;R0 = H'7FFFFFFF, R1 = H'80000000
BT       TRGET_T    ;T = 0, so branch is not taken.
CMP/HS  R0,R1      ;R0 = H'7FFFFFFF, R1 = H'80000000
BT       TRGET_T    ;T = 1, so branch is taken.
CMP/STR  R2,R3      ;R2 = "ABCD", R3 = "XYZC"
BT       TRGET_T    ;T = 1, so branch is taken.

```

10.17	DIV0S	DIVide (step 0) as Signed		Arithmetic Instruction	
	Initialization for Signed Division				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
DIV0S Rm,Rn	MSB of Rn → Q, MSB of Rm → M, M^Q → T	0010nnnnmmmm0111	1	Result of calculation	

## Description

This instruction performs initial settings for signed division. This instruction is followed by a DIV1 instruction that executes 1-digit division, for example, and repeated divisions are executed to find the quotient. See the description of the DIV1 instruction for details.

## Operation

```

DIV0S(long m, long n)    /* DIV0S Rm,Rn */
{
    if ((R[n] & 0x80000000)==0) Q=0;
    else Q=1;
    if ((R[m] & 0x80000000)==0) M=0;
    else M=1;
    T=!(M==Q);
    PC+=2;
}

```

## Example

See the examples for the DIV1 instruction.

10.18	DIV0U	DIVide (step 0) as Unsigned	Arithmetic Instruction	
	Initialization for Unsigned Division			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
DIV0U	0 → M/Q/T	0000000000011001	1	0

## Description

This instruction performs initial settings for unsigned division. This instruction is followed by a DIV1 instruction that executes 1-digit division, for example, and repeated divisions are executed to find the quotient. See the description of the DIV1 instruction for details.

## Operation

```
DIV0U( )          /* DIV0U */
{
    M=Q=T=0;
    PC+=2;
}
```

## Example

See the examples for the DIV1 instruction.

10.19	DIV1	DIVide 1 step	Arithmetic Instruction	
	Division			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
DIV1 Rm,Rn	1-step division (Rn ÷ Rm)	0011nnnnmmmm0100	1	Result of calculation

## Description

This instruction performs 1-digit division (1-step division) of the 32-bit contents of general register Rn (dividend) by the contents of Rm (divisor). The quotient is obtained by repeated execution of this instruction alone or in combination with other instructions. The specified registers and the M, Q, and T bits must not be modified during these repeated executions.

In 1-step division, the dividend is shifted 1 bit to the left, the divisor is subtracted from this, and the quotient bit is reflected in the Q bit according to whether the result is positive or negative.

The remainder can be found as follows after first finding the quotient using the DIV1 instruction:

$$(\text{Remainder}) = (\text{dividend}) - (\text{divisor}) \times (\text{quotient})$$

Detection of division by zero or overflow is not provided. Check for division by zero and overflow division before executing the division. A remainder operation is not provided. Find the remainder by finding the product of the divisor and the obtained quotient, and subtracting this value from the dividend.

Initial settings should first be made with the DIV0S or DIV0U instruction. DIV1 is executed once for each bit of the divisor. If a quotient of more than 16 bits is required, place an ROTCL instruction before the DIV1 instruction. See the examples for details of the division sequence.

## Operation

```
DIVl(long m, long n)    /* DIVl Rm,Rn */
{
    unsigned long tmp0, tmp2;
    unsigned char old_q, tmp1;

    old_q=Q;
    Q=(unsigned char)((0x80000000 & R[n])!=0);
    tmp2= R[m];
    R[n]<=<=1;
    R[n]|=(unsigned long)T;

    switch(old_q){
    case 0:switch(M){
        case 0:tmp0=R[n];
            R[n]-=tmp2;
            tmp1=(R[n]>tmp0);
            switch(Q){
            case 0:Q=tmp1;
                break;
            case 1:Q=(unsigned char)(tmp1==0);
                break;
            }
            break;
        case 1:tmp0=R[n];
            R[n]+=tmp2;
            tmp1=(R[n]<tmp0);
            switch(Q){
            case 0:Q=(unsigned char)(tmp1==0);
                break;
            case 1:Q=tmp1;
                break;
            }
            break;
    }
    break;
    case 1:switch(M){
        case 0:tmp0=R[n];
            R[n]+=tmp2;
            tmp1=(R[n]<tmp0);
            switch(Q){
            case 0:Q=tmp1;
                break;
            case 1:Q=(unsigned char)(tmp1==0);
                break;
            }
            break;
        case 1:tmp0=R[n];
```

```
        R[n]-=tmp2;
        tmp1=(R[n]>tmp0);
        switch(Q){
        case 0:Q=(unsigned char)(tmp1==0);
                break;
        case 1:Q=tmp1;
                break;
        }
        break;
    }
    break;
}
T=(Q==M);
PC+=2;
}
```

## Example 1

		;R1 (32 bits) ÷ R0 (16 bits) = R1 (16 bits); unsigned
SHLL16	R0	;Set divisor in upper 16 bits, clear lower 16 bits to 0
TST	R0,R0	;Check for division by zero
BT	ZERO_DIV	;
CMP/HS	R0,R1	;Check for overflow
BT	OVER_DIV	;
DIV0U		;Flag initialization
.arepeat	16	;
DIV1	R0,R1	;Repeat 16 times
.aendr		;
ROTCL	R1	;
EXTU.W	R1,R1	;R1 = quotient

## Example 2

		; R1:R2 (64 bits) ÷ R0 (32 bits) = R2 (32 bits); unsigned
TST	R0,R0	;Check for division by zero
BT	ZERO_DIV	;
CMP/HS	R0,R1	;Check for overflow
BT	OVER_DIV	;
DIV0U		;Flag initialization
.arepeat	32	;
ROTCL	R2	;Repeat 32 times
DIV1	R0,R1	;
.aendr		;
ROTCL	R2	;R2 = quotient

### Example 3

```

                                ;R1 (16 bits) ÷ R0 (16 bits) = R1 (16 bits); signed
SHLL16    R0                    ;Set divisor in upper 16 bits, clear lower 16 bits to 0
EXTS.W    R1,R1                 ;Dividend sign-extended to 32 bits
XOR       R2,R2                 ;R2 = 0
MOV       R1,R3                 ;
ROTCL     R3                    ;
SUBC      R2,R1                 ;If dividend is negative, subtract 1
DIV0S     R0,R1                 ;Flag initialization
.arepeat  16                    ;
DIV1      R0,R1                 ;Repeat 16 times
.aendr                                          ;
EXTS.W    R1,R1                 ;
ROTCL     R1                    ;R1 = quotient (one's complement notation)
ADDC      R2,R1                 ;If MSB of quotient is 1, add 1 to convert to two's complement notation
EXTS.W    R1,R1                 ;R1 = quotient (two's complement notation)

```

### Example 4

```

                                ;R2 (32 bits) ÷ R0 (32 bits) = R2 (32 bits); signed
MOV       R2,R3                 ;
ROTCL     R3                    ;
SUBC      R1,R1                 ;Dividend sign-extended to 64 bits (R1:R2)
XOR       R3,R3                 ;R3 = 0
SUBC      R3,R2                 ;If dividend is negative, subtract 1 to convert to one's complement
                                notation
DIV0S     R0,R1                 ;Flag initialization
.arepeat  32                    ;
ROTCL     R2                    ;Repeat 32 times
DIV1      R0,R1                 ;
.aendr                                          ;
ROTCL     R2                    ;R2 = quotient (one's complement notation)
ADDC      R3,R2                 ;If MSB of quotient is 1, add 1 to convert to two's complement notation
                                ;R2 = quotient (two's complement notation)

```

10.20	DMULS.L	Double-length MULTiply as Signed	Arithmetic Instruction	
	Signed Double-Length Multiplication			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
DMULS.L Rm,Rn	Signed, Rn x Rm → MACH, MACL	0011nnnnmmmm1101	2–5	—

### **Description**

This instruction performs 32-bit multiplication of the contents of general register Rn by the contents of Rm, and stores the 64-bit result in the MACH and MACL registers. The multiplication is performed as a signed arithmetic operation.

### **Operation**

```
DMULS(long m, long n) /* DMULS.L Rm,Rn */
{
    unsigned long RnL,RnH,RmL,RmH,Res0,Res1,Res2;
    unsigned long temp0,temp1,temp2,temp3;
    long tempm,tempn,fnLmL;

    tempn=(long)R[n];
    tempm=(long)R[m];
    if (tempn<0) tempn=0-tempn;
    if (tempm<0) tempm=0-tempm;
    if ((long)(R[n]^R[m])<0) fnLmL=-1;
    else fnLmL=0;

    temp1=(unsigned long)tempn;
    temp2=(unsigned long)tempm;

    RnL=temp1&0x0000FFFF;
    RnH=(temp1>>16)&0x0000FFFF;
    RmL=temp2&0x0000FFFF;
    RmH=(temp2>>16)&0x0000FFFF;

    temp0=RmL*RnL;
    temp1=RmH*RnL;
    temp2=RmL*RnH;
    temp3=RmH*RnH;

    Res2=0;
    Res1=temp1+temp2;
    if (Res1<temp1) Res2+=0x00010000;
    temp1=(Res1<<16)&0xFFFF0000;
    Res0=temp0+temp1;
    if (Res0<temp0) Res2++;
```



```

Res2=Res2+((Res1>>16)&0x0000FFFF)+temp3;

if (fnLmL<0) {
    Res2=~Res2;
    if (Res0==0)
        Res2++;
    else
        Res0=(~Res0)+1;
}

MACH=Res2;
MACL=Res0;
PC+=2;
}

```

## Example

```

DMULS.LR0,R1;Before execution      R0 = H'FFFFFFFE, R1 = H'00005555
                                ;After execution    MACH = H'FFFFFFF, MACL = H'FFFF5556
STS      MACH,R0      ;Get operation result (upper)
STS      MACL,R1      ;et operation result (lower)

```

10.21	DMULU.L	Double-length MULTiply as Unsigned	Arithmetic Instruction	
	Unsigned Double-Length Multiplication			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
DMULU.L Rm,Rn	Unsigned, Rn x Rm → MACH, MACL	0011nnnnmmmm0101	2–5	—

## Description

This instruction performs 32-bit multiplication of the contents of general register Rn by the contents of Rm, and stores the 64-bit result in the MACH and MACL registers. The multiplication is performed as an unsigned arithmetic operation.

## Operation

```

DMULU(long m, long n) /* DMULU.L Rm,Rn */
{
    unsigned long RnL,RnH,RmL,RmH,Res0,Res1,Res2;
    unsigned long temp0,temp1,temp2,temp3;

    RnL=R[n]&0x0000FFFF;
    RnH=(R[n]>>16)&0x0000FFFF;

```

```
RmL=R[m]&0x0000FFFF;
RmH=(R[m]>>16)&0x0000FFFF;

temp0=RmL*RnL;
temp1=RmH*RnL;
temp2=RmL*RnH;
temp3=RmH*RnH;

Res2=0
Res1=temp1+temp2;
if (Res1<temp1) Res2+=0x00010000;

temp1=(Res1<<16)&0xFFFF0000;
Res0=temp0+temp1;
if (Res0<temp0) Res2++;

Res2=Res2+((Res1>>16)&0x0000FFFF)+temp3;

MACH=Res2;
MACL=Res0;
PC+=2;
}
```

Example

```
DMULU.L      R0,R1      ;Before execution      R0 = H'FFFFFFFE, R1 = H'00005555
               ;After execution      MACH = H'00005554, MACL = H'FFFF5556
STS          MACH,R0     ;Get operation result (upper)
STS          MACL,R1     ;Get operation result (lower)
```

10.22	DT	Decrement and Test			Arithmetic Instruction
	Decrement and Test				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
DT Rn	Rn − 1 → Rn; if Rn = 0, 1 → T In Rn π 0, 0 → T	0100nnnn00010000	1	Test result	

Description

This instruction decrements the contents of general register Rn by 1 and compares the result with zero. If the result is zero, the T bit is set to 1. If the result is nonzero, the T bit is cleared to 0.

## Operation

```

DT(long n)          /* DT Rn */
{
    R[n]--;
    if (R[n]==0) T=1;
    else T=0;
    PC+=2;
}

```

## Example

```

MOV      #4,R5 ;Set loop count
LOOP:
ADD      R0,R1 ;
DT       R5    ;Decrement R5 value and check for 0.
BF       LOOP  ;If T = 0, branch to LOOP (in this example, 4 loops are executed).

```

10.23	EXTS	EXTend as Signed	Arithmetic Instruction	
	Sign Extension			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
EXTS.B Rm,Rn	Rm sign-extended from byte → Rn	0110nnnnmmmm1110	1	—
EXTS.W Rm,Rn	Rm sign-extended from word → Rn	0110nnnnmmmm1111	1	—

## Description

This instruction sign-extends the contents of general register Rm and stores the result in Rn.

For a byte specification, the value of Rm bit 7 is transferred to Rn bits 8 to 31. For a word specification, the value of Rm bit 15 is transferred to Rn bits 16 to 31.

Operation

```
EXTSB(long m, long n)          /* EXTS.B Rm,Rn */
{
    R[n]=R[m];
    if ((R[m]&0x00000080)==0) R[n]&=0x000000FF;
    else R[n]|=0xFFFFFFFF00;
    PC+=2;
}

EXTSW(long m, long n)          /* EXTS.W Rm,Rn */
{
    R[n]=R[m];
    if ((R[m]&0x00008000)==0) R[n]&=0x0000FFFF;
    else R[n]|=0xFFFF0000;
    PC+=2;
}
```

Example

```
EXTS.B  R0,R1      ;Before execution  R0 = H'00000080
                  ;After execution   R1 = H'FFFFFF80
EXTS.W  R0,R1      ;Before execution  R0 = H'00008000
                  ;After execution   R1 = H'FFFF8000
```

10.24	EXTU	EXTend as Unsigned	Arithmetic Instruction	
	Zero Extension			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
EXTU.B Rm,Rn	Rm zero-extended from byte → Rn	0110nnnnmmmm1100	1	—
EXTU.W Rm,Rn	Rm zero-extended from word → Rn	0110nnnnmmmm1101	1	—

Description

This instruction zero-extends the contents of general register Rm and stores the result in Rn.  
For a byte specification, 0 is transferred to Rn bits 8 to 31. For a word specification, 0 is transferred to Rn bits 16 to 31.

## Operation

```
EXTUB(long m, long n) /* EXTU.B Rm,Rn */
{
    R[n]=R[m];
    R[n]&=0x000000FF;
    PC+=2;
}

EXTUW(long m, long n)/* EXTU.W Rm,Rn */
{
    R[n]=R[m];
    R[n]&=0x0000FFFF;
    PC+=2;
}
```

## Example

```
EXTU.B      R0,R1      ;Before execution  R0 = H'FFFFFF80
                          ;After execution  R1 = H'00000080
EXTU.W      R0,R1      ;Before execution  R0 = H'FFFF8000
                          ;After execution  R1 = H'00008000
```

10.25	FABS	Floating-point ABSolute value	Floating-Point Instruction		
	Floating-Point Absolute Value				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FABS FRn	FRn  → FRn	1111nnnn01011101	1	—
1	FABS DRn	DRn  → DRn	1111nnn001011101	1	—

## Description

This instruction clears the most significant bit of the contents of floating-point register FRn/DRn to 0, and stores the result in FRn/DRn.

The cause and flag fields in FPSCR are not updated.

## Operation

```
void FABS (int n){
    FR[n] = FR[n] & 0x7fffffff;
    pc += 2;
}
/* Same operation is performed regardless of precision. */
```

## Possible Exceptions:

None

10.26	FADD	Floating-point ADD				Floating-Point Instruction
	Floating-Point Addition					
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit	
0	FADD FRm,FRn	FRn+FRm → FRn	1111nnnnmmmm0000	1	—	
1	FADD DRm,DRn	DRn+DRm → DRn	1111nnn0mmm00000	6	—	

## Description

When FPSCR.PR = 0: Arithmetically adds the two single-precision floating-point numbers in FRn and FRm, and stores the result in FRn.

When FPSCR.PR = 1: Arithmetically adds the two double-precision floating-point numbers in DRn and DRm, and stores the result in DRn.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FADD (int m,n)
{
    pc += 2;
    clear_cause();
    if((data_type_of(m) == sNaN) ||
        (data_type_of(n) == sNaN)) invalid(n);
    else if((data_type_of(m) == qNaN) ||
        (data_type_of(n) == qNaN)) qnan(n);
    else if((data_type_of(m) == DENORM) ||
        (data_type_of(n) == DENORM)) set_E();
    else switch (data_type_of(m)){
        case NORM: switch (data_type_of(n)){
            case NORM:    normal_faddsub(m,n,ADD); break;
            case PZERO:
            case NZERO:register_copy(m,n); break;
            default:      break;
        }            break;
        case PZERO: switch (data_type_of(n)){
            case NZERO:    zero(n,0); break;
            default:      break;
        }            break;
        case NZERO:      break;
    }
```

```

        case PINF: switch (data_type_of(n)){
            case NINF:    invalid(n);    break;
            default:     inf(n,0);       break;
        }             break;
        case NINF: switch (data_type_of(n)){
            case PINF:    invalid(n);    break;
            default:     inf(n,1);       break;
        }             break;
    }
}

```

## FADD Special Cases

FRm,DRm	FRn,DRn							
	NORM	+0	−0	+INF	−INF	DENORM	qNaN	sNaN
NORM	ADD				−INF			
+0	+0							
−0			−0					
+INF	+INF				Invalid			
−INF	−INF			Invalid	−INF			
DENORM						Error		
qNaN							qNaN	
sNaN								Invalid

---

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

---

## Possible Exceptions:

- FPU error
- Invalid operation
- Overflow
- Underflow
- Inexact

10.27	FCMP	Floating-point CoMPare	Floating-Point Instruction		
	Floating-Point Comparison				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	1. FCMP/EQ FRm,FRn	(FRn==FRm)?1:0 → T	1111nnnnmmmm0100	1	1/0
1	2. FCMP/EQ DRm,DRn	(DRn==DRm)?1:0 → T	1111nnn0mmmm00100	1	1/0
0	3. FCMP/GT FRm,FRn	(FRn>FRm)?1:0 → T	1111nnnnmmmm0101	2	1/0
1	4. FCMP/GT DRm,DRn	(DRn>DRm)?1:0 → T	1111nnn0mmmm00101	2	1/0

## Description

- 1) When FPSCR.PR = 0: Arithmetically compares the two single-precision floating-point numbers in FRn and FRm, and stores 1 in the T bit if they are equal, or 0 otherwise.
- 2) When FPSCR.PR = 1: Arithmetically compares the two double-precision floating-point numbers in DRn and DRm, and stores 1 in the T bit if they are equal, or 0 otherwise.
- 3) When FPSCR.PR = 0: Arithmetically compares the two single-precision floating-point numbers in FRn and FRm, and stores 1 in the T bit if FRn > FRm, or 0 otherwise.
- 4) When FPSCR.PR = 1: Arithmetically compares the two double-precision floating-point numbers in DRn and DRm, and stores 1 in the T bit if DRn > DRm, or 0 otherwise.

## Operation

```
void FCMP_EQ(int m,n) /* FCMP/EQ  FRm,FRn */
{
    pc += 2;
    clear_cause();
    if(fcmp_chk (m,n) == INVALID) fcmp_invalid();
    else if(fcmp_chk (m,n) == EQ)  T = 1;
    else                          T = 0;
}
void FCMP_GT(int m,n) /* FCMP/GT  FRm,FRn */
{
    pc += 2;
    clear_cause();
    if ((fcmp_chk (m,n) == INVALID) ||
        (fcmp_chk (m,n) == UO)) fcmp_invalid();
    else if(fcmp_chk (m,n) == GT)  T = 1;
    else                          T = 0;
}
int fcmp_chk (int m,n)
{
    if((data_type_of(m) == sNaN) ||
        (data_type_of(n) == sNaN))    return(INVALID);
```



```
else if((data_type_of(m) == qNaN) ||
        (data_type_of(n) == qNaN))    return(UO);
else switch(data_type_of(m)){
    case NORM:    switch(data_type_of(n)){
        case PINF    :return(GT); break;
        case NINF    :return(LT); break;
        default:
            break;
    }    break;
    case PZERO:
    case NZERO:    switch(data_type_of(n)){
        case PZERO    :
        case NZERO    :return(EQ); break;
        default:
            break;
    }    break;
    case PINF :    switch(data_type_of(n)){
        case PINF    :return(EQ); break;
        default:return(LT);    break;
    }    break;
    case NINF :    switch(data_type_of(n)){
        case NINF    :return(EQ); break;
        default:return(GT);    break;
    }    break;
}
if(FPSCR_PR == 0) {
    if(FR[n] == FR[m])    return(EQ);
    else if(FR[n] > FR[m])    return(GT);
    else    return(LT);
}else {
    if(DR[n>>1] == DR[m>>1])    return(EQ);
    else if(DR[n>>1] > DR[m>>1]) return(GT);
    else    return(LT);
}
}
void fcmp_invalid()
{
    set_V();    if((FPSCR & ENABLE_V) == 0)    T = 0;
}
```

FCMP Special Cases

FCMP/EQ	FRn,DRn											
FRm,DRm	NORM	DENORM	+0	−0	+INF	−INF	qNaN	sNaN				
NORM	CMP				−INF							
DENORM												
+0										EQ		
−0												
+INF					EQ		!EQ					
−INF					EQ							
qNaN												
sNaN												
	Invalid											

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

FCMP/EQ	FRn,DRn									
FRm,DRm	NORM	DENORM	+0	−0	+INF	−INF	qNaN	sNaN		
NORM	CMP				−INF					
DENORM										
+0									!GT	
−0										
+INF	!GT				!GT		UO			
−INF	GT				!GT					
qNaN										
sNaN							Invalid			

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

Possible Exceptions:

Invalid operation

10.28	FCNVDS Floating-point CoNVert Double to Single precision				
	Double-Precision to Single-Precision Conversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	—	—	—	—	—
1	FCNVDS DRm,FPUL	(float)DRm → FPUL	1111mmm010111101	2	—

## Description

When FPSCR.PR = 1: This instruction converts the double-precision floating-point number in DRm to a single-precision floating-point number, and stores the result in FPUL.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FPUL is not updated. Appropriate processing should therefore be performed by software.

## Operation

```

void FCNVDS(int m){
    case((FPSCR.PR){
        0: undefined_operation(); /* reserved */
        1: fcnvds(m); break; /* FCNVDS */
    }
}
void fcnvds(int m)
{
    pc += 2;
    clear_cause();
    case(data_type_of(m, *FPUL)){
        NORM :
        PZERO :
        NZERO :    normal_fcnvds(m); break;
        DENORM : set_E();
        PINF  :    *FPUL = 0x7f800000; break;
        NINF  :    *FPUL = 0xff800000; break;
        qNaN  :    *FPUL = 0x7fbfffff; break;
        sNaN  :    set_V();
                    if((FPSCR & ENABLE_V) == 0) *FPUL = 0x7fbfffff;
                    else fpu_exception_trap(); break;
    }
}
void normal_fcnvds(int m, float *FPUL)
{
    int sign;
    float abs;

```

```
union {
    float f;
    int l;
} dstf,tmpf;
union {
    double d;
    int l[2];
} dstd;
dstd.d = DR[m>>1];
if(dstd.l[1] & 0xffffffff) set_I();
if(FPSCR_RM == 1) dstd.l[1] &= 0xe0000000; /* round toward zero*/
dstf.f = dstd.d;
check_single_exception(FPUL, dstf.f);
}
```

### FCNVDS Special Cases

FRn	+NORM	−NORM	+0	−0	+INF	−INF	qNaN	sNaN
FCNVDS(FRn FPUL)	FCNVDS	FCNVDS	+0	−0	+INF	−INF	qNaN	Invalid

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

### Possible Exceptions:

- FPU error
- Invalid operation
- Overflow
- Underflow
- Inexact

10.29	FCNVSD	Floating-point CoNVert Single to Double precision		Floating-Point Instruction	
	Single-Precision to Double-Precision Conversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	—	—	—	—	—
1	FCNVSD FPUL, DRn	(double) FPUL → DRn	1111nnn010101101	2	—

### Description

When FPSCR.PR = 1: This instruction converts the single-precision floating-point number in FPUL to a double-precision floating-point number, and stores the result in DRn.

## Operation

```

void FCNVSD(int n){
    pc += 2;
    clear_cause();
    case((FPSCR_PR){
        0: undefined_operation();    /* reserved */
        1: fcnvdsd (n,FPUL); break; /* FCNVSD */
    })
}

void fcnvdsd(int n, float *FPUL)
{
    case(fpul_type(FPUL)){
        PZERO :
        NZERO :
        PINF  :
        NINF  :          DR[n>>1] = *FPUL;break;
        DENORM :          set_E();          break;
        qNaN  :          qnan(n);          break;
        sNaN  :          invalid(n);        break;
    }
}

int fpul_type(int *FPUL)
{
    int abs;
    abs = *FPUL & 0x7fffffff;
    if(abs < 0x00800000){
        if((FPSCR_DN == 1) || (abs == 0x00000000)){
            if(sign_of(src) == 0) return(PZERO);
            else return(NZERO);
        }
        else return(DENORM);
    }
    else if(abs < 0x7f800000)return(NORM);
    else if(abs == 0x7f800000) {
        if(sign_of(src) == 0) return(PINF);
        else return(NINF);
    }
    else if(abs < 0x7fc00000) return(qNaN);
    else return(sNaN);
}

```

## FCNVSD Special Cases

FR <sub>n</sub>	+NORM	−NORM	+0	−0	+INF	−INF	qNaN	sNaN
FCNVSD(FPUL FR <sub>n</sub> )	+NORM	−NORM	+0	−0	+INF	−INF	qNaN	Invalid

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

## Possible Exceptions:

- FPU error
- Invalid operation

10.30	FDIV	Floating-point DIVide	Floating-Point Instruction		
	Floating-Point Division				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FDIV FRm,FRn	FRn/FRm → FRn	1111nnnnmmmm0011	10	—
1	FDIV DRm,DRn	DRn/DRm → DRn	1111nnn0mmm00011	23	—

## Description

When FPSCR.PR = 0: Arithmetically divides the single-precision floating-point number in FRn by the single-precision floating-point number in FRm, and stores the result in FRn.

When FPSCR.PR = 1: Arithmetically divides the double-precision floating-point number in DRn by the double-precision floating-point number in DRm, and stores the result in DRn.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FDIV(int m,n)      /* FDIV FRm,FRn */
{
    pc += 2;
    clear_cause();
    if((data_type_of(m) == sNaN) ||
        (data_type_of(n) == sNaN)) invalid(n);
    else if((data_type_of(m) == qNaN) ||
        (data_type_of(n) == qNaN)) qnan(n);
    else switch (data_type_of(m)){
        case NORM: switch (data_type_of(n)){
            case PINF:
            case NINF:    inf(n,sign_of(m)^sign_of(n));break;
            case PZERO:
            case NZERO:   zero(n,sign_of(m)^sign_of(n));break;
            case DENORM: set_E();    break;
            default:     normal_fdiv(m,n);  break;
        }    break;
    }
```

```
        case PZERO: switch (data_type_of(n)){
            case PZERO:
            case NZERO: invalid(n);break;
            case PINF:
            case NINF: break;
            default: dz(n,sign_of(m)^sign_of(n));break;
        } break;
    case NZERO: switch (data_type_of(n)){
        case PZERO:
        case NZERO: invalid(n); break;
        case PINF: inf(n,1); break;
        case NINF: inf(n,0); break;
        default: dz(FR[n],sign_of(m)^sign_of(n)); break;
    } break;
    case DENORM: set_E(); break;
    case PINF :
    case NINF : switch (data_type_of(n)){
        case PINF:
        case NINF: invalid(n); break;
        default: zero(n,sign_of(m)^sign_of(n));break;
    } break;
}

}

void normal_fdiv(int m,n)
{
    union {
        float f;
        int l;
    } dstf,tmpf;
    union {
        double d;
        int l[2];
    } dstd,tmpd;
    union {
        int double x;
        int l[4];
    } tmpx;
    if(FPSCR_PR == 0) {
        tmpf.f = FR[n]; /* save destination value */
        dstf.f /= FR[m]; /* round toward nearest or even */
        tmpd.d = dstf.f; /* convert single to double */
        tmpd.d *= FR[m];
        if(tmpf.f != tmpd.d) set_I();
        if((tmpf.f < tmpd.d) && (SPSCR_RM == 1))
            dstf.l -= 1; /* round toward zero */
        check_single_exception(&FR[n], dstf.f);
    } else {
```

```
        tmpd.d = DR[n>>1]; /* save destination value */
        dstd.d /= DR[m>>1]; /* round toward nearest or even */
        tmpx.x = dstd.d; /* convert double to int double */
        tmpx.x *= DR[m>>1];
        if(tmpd.d != tmpx.x) set_I();
        if((tmpd.d < tmpx.x) && (SPSCR_RM == 1)) {
            dstd.l[1] -= 1; /* round toward zero */
            if(dstd.l[1] == 0xffffffff) dstd.l[0] -= 1;
        }
        check_double_exception(&DR[n>>1], dstd.d);
    }
}
```

FDIV Special Cases

FRm,DRm	FRn,DRn							
	NORM	+0	−0	+INF	−INF	DENORM	qNaN	sNaN
NORM	DIV	0		INF		Error		
+0	DZ	Invalid		+INF	−INF	DZ		
−0				−INF	+INF			
+INF	0	+0	−0	Invalid				
−INF		−0	+0					
DENORM						Error		
qNaN							qNaN	
sNaN								Invalid

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

Possible Exceptions:

- FPU error
- Invalid operation
- Divide by zero
- Overflow
- Underflow
- Inexact



10.31	FIPR	Floating-point Inner PRoduct		Floating-Point Instruction	
	Floating-Point Inner Product				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FIPR FV <sub>m</sub> ,FV <sub>n</sub>	FV <sub>n</sub> • FV <sub>m</sub> → FR[n+3]	1111nnmm11101101	1	—
—	—	—	—	—	—

**Note:** FV0 = {FR0, FR1, FR2, FR3}  
 FV4 = {FR4, FR5, FR6, FR7}  
 FV8 = {FR8, FR9, FR10, FR11}  
 FV12 = {FR12, FR13, FR14, FR15}

## Description

When FPSCR.PR = 0: This instruction calculates the inner products of the 4-dimensional single-precision floating-point vector indicated by FV<sub>n</sub> and FV<sub>m</sub>, and stores the results in FR[n + 3].

The FIPR instruction is intended for speed rather than accuracy, and therefore the results will differ from those obtained by using a combination of FADD and FMUL instructions. The FIPR execution sequence is as follows:

- 1) Multiplies all terms. The results are 28 bits long.
- 2) Aligns these results, rounding them to fit within 30 bits.
- 3) Adds the aligned values.
- 4) Performs normalization and rounding.

Special processing is performed in the following cases:

- 1) If an input value is an sNaN, an invalid exception is generated.
- 2) If the input values to be multiplied include a combination of 0 and infinity, an invalid exception is generated.
- 3) In cases other than the above, if the input values include a qNaN, the result will be a qNaN.
- 4) In cases other than the above, if the input values include infinity:
  - a) If multiplication results in two or more infinities and the signs are different, an invalid exception will be generated.
  - b) Otherwise, correct infinities will be stored.
- 5) If the input values do not include an sNaN, qNaN, or infinity, processing is performed in the normal way.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FR<sub>n</sub> or DR<sub>n</sub> is not updated. Appropriate processing should therefore be performed by software.

### Operation

```
void FIPR(int m,n)    /* FIPR FVm,FVn */
{
    if(FPSCR_PR == 0)    {
        pc += 2;
        clear_cause();
        fipr(m,n);
    }
    else    undefined_operation();
}
```

### Possible Exceptions:

- Invalid operation
- Overflow
- Underflow
- Inexact

10.32	FLDI0	Floating-point LoaD Immediate 0.0		Floating-Point Instruction	
	0.0 Load				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FLDI0 FRn	0x00000000 → FRn	1111nnnn10001101	1	—
1	—	—	—	—	—

### Description

When FPSCR.PR = 0, this instruction loads floating-point 0.0 (0x00000000) into FRn.

### Operation

```
void FLDI0(int n)
{
    FR[n] = 0x00000000;
    pc += 2;
}
```

### Possible Exceptions:

None

10.33	FLDI1	Floating-point Load Immediate 1.0	Floating-Point Instruction	
	1.0 Load			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
FLDI1 FRn	0x3F800000 → FRn	1111nnnn10011101	1	—
—	—	—	—	—

### Description

When FPSCR.PR = 0, this instruction loads floating-point 1.0 (0x3F800000) into FRn.

### Operation

```
void FLDI1(int n)
{
    FR[n] = 0x3F800000;
    pc += 2;
}
```

### Possible Exceptions:

None

10.34	FLDS	Floating-point Load to System register	Floating-Point Instruction	
	Transfer to System Register			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
FLDS FRm,FPUL	FRm → FPUL	1111mmmm00011101	1	—

### Description

This instruction loads the contents of floating-point register FRm into system register FPUL.

### Operation

```
void FLDS(int m, float *FPUL)
{
    *FPUL = FR[m];
    pc += 2;
}
```

## Possible Exceptions:

None

10.35	FLOAT	Floating-point convert from integer		Floating-Point Instruction	
	Integer to Floating-Point Conversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FLOAT FPUL,FRn	(float)FPUL → FRn	1111nnnn00101101	1	—
1	FLOAT FPUL,DRn	(double)FPUL → DRn	1111nnn000101101	2	—

## Description

When FPSCR.PR = 0: Taking the contents of FPUL as a 32-bit integer, converts this integer to a single-precision floating-point number and stores the result in FRn.

When FPSCR.PR = 1: Taking the contents of FPUL as a 32-bit integer, converts this integer to a double-precision floating-point number and stores the result in DRn.

When FPSCR.enable.I = 1, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FLOAT(int n, float *FPUL)
{
    union {
        double d;
        int l[2];
    } tmp;
    pc += 2;
    clear_cause();
    if(FPSCR.PR==0){
        FR[n] = *FPUL; /* convert from integer to float */
        tmp.d = *FPUL;
        if(tmp.l[1] & 0x1fffffff) inexact();
    } else {
        DR[n>>1] = *FPUL; /* convert from integer to double */
    }
}
```

## Possible Exceptions:

Inexact: Not generated when FPSCR.PR = 1.

10.36	FMAC	Floating-point Multiply and ACcumulate			Floating-Point Instruction	
	Floating-Point Multiply and Accumulate					
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit	
0	FMAC FR0,FRm,FRn	FR0*FRm+FRn → FRn	1111nnnnmmmm1110	1	—	
1	—	—	—	—	—	

## Description

When FPSCR.PR = 0: This instruction arithmetically multiplies the two single-precision floating-point numbers in FR0 and FRm, arithmetically adds the contents of FRn, and stores the result in FRn.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FMAC(int m,n)
{
    pc += 2;
    clear_cause();
    if(FPSCR_PR == 1) undefined_operation();
    else if((data_type_of(0) == sNaN) ||
            (data_type_of(m) == sNaN) ||
            (data_type_of(n) == sNaN)) invalid(n);
    else if((data_type_of(0) == qNaN) ||
            (data_type_of(m) == qNaN)) qnan(n);
    else if((data_type_of(0) == DENORM) ||
            (data_type_of(m) == DENORM)) set_E();
    else switch (data_type_of(0)){
        case NORM: switch (data_type_of(m)){
            case PZERO:
            case NZERO: switch (data_type_of(n)){
                case DENORM: set_E(); break;
                case qNaN: qnan(n); break;
                case PZERO:
                case NZERO: zero(n,sign_of(0)^ sign_of(m)^sign_of(n)); break;
                default: break;
            }
        }
    }
}
```

```
case PINF:
case NINF: switch (data_type_of(n)){
    case DENORM: set_E(); break;
    case qNaN:   qnan(n); break;
    case PINF:
    case NINF: if(sign_of(0)^ sign_of(m)^sign_of(n)) invalid(n);
               else inf(n,sign_of(0)^ sign_of(m)); break;
    default:    inf(n,sign_of(0)^ sign_of(m)); break;
}
case NORM: switch (data_type_of(n)){
    case DENORM: set_E(); break;
    case qNaN:   qnan(n); break;
    case PINF:
    case NINF:   inf(n,sign_of(n)); break;
    case PZERO:
    case NZERO:
    case NORM:   normal_fmac(m,n); break;
} break;
case PZERO:
case NZERO: switch (data_type_of(m)){
    case PINF:
    case NINF: invalid(n); break;
    case PZERO:
    case NZERO:
    case NORM: switch (data_type_of(n)){
        case DENORM: set_E(); break;
        case qNaN:   qnan(n); break;
        case PZERO:
        case NZERO: zero(n,sign_of(0)^ sign_of(m)^sign_of(n)); break;
        default:    break;
    } break;
} break;
case PINF :
case NINF : switch (data_type_of(m)){
    case PZERO:
    case NZERO: invalid(n); break;
    default: switch (data_type_of(n)){
        case DENORM: set_E(); break;
        case qNaN:   qnan(n); break;
        default:    inf(n,sign_of(0)^sign_of(m)^sign_of(n));break
    } break;
} break;
}
```

```
void normal_fmac(int m,n)
{
union {
    int double x;
    int l[4];
} dstx,tmpx;
float dstf,srcf;
    if((data_type_of(n) == PZERO) || (data_type_of(n) == NZERO))
        srcf = 0.0; /* flush denormalized value */
    else    srcf = FR[n];
    tmpx.x = FR[0]; /* convert single to int double */
    tmpx.x *= FR[m]; /* exact product */
    dstx.x = tmpx.x + srcf;
    if((dstx.x == srcf) && (tmpx.x != 0.0)) ||
        ((dstx.x == tmpx.x) && (srcf != 0.0)) {
        set_I();
        if(sign_of(0)^ sign_of(m)^ sign_of(n)) {
            dstx.l[3] -= 1; /* correct result */
            if(dstx.l[3] == 0xffffffff) dstx.l[2] -= 1;
            if(dstx.l[2] == 0xffffffff) dstx.l[1] -= 1;
            if(dstx.l[1] == 0xffffffff) dstx.l[0] -= 1;
        }
        else    dstx.l[3] |= 1;
    }
    if((dstx.l[1] & 0x01ffffff) || dstx.l[2] || dstx.l[3]) set_I();
    if(FPSCR_RM == 1) {
        dstx.l[1] &= 0xfe000000; /* round toward zero */
        dstx.l[2]  = 0x00000000;
        dstx.l[3]  = 0x00000000;
    }
    dstf = dstx.x;
    check_single_exception(&FR[n],dstf);
}
```

## FMAC Special Cases

FRn	FRO	FRm										
		+Norm	−Norm	+0	−0	+INF	−INF	Denorm	qNaN	sNaN		
	Norm	MAC				INF						
	0					Invalid						
	INF	INF		Invalid		INF						
+0	Norm	MAC				Invalid						
	0	+0										
	INF	INF		Invalid								
−0	+Norm	MAC		+0	−0	+INF	−INF					
	−Norm			−0	+0	−INF	+INF					
	+0	+0	−0	+0	−0	Invalid						
	−0	−0	+0	−0	+0							
	INF	INF		Invalid							INF	
	+INF	+Norm	+INF				Invalid					
−Norm						+INF						
0						Invalid						
+INF		Invalid			+INF							
−INF		Invalid	+INF				+INF					
− INF		+Norm	−INF				−INF					
	−Norm											
	0											
	+INF	Invalid	Invalid		−INF							
	−INF	−INF				−INF	Invalid					
	Denorm	Norm										
0						Invalid						
INF		Invalid										
!sNaN	Denorm										Error	
qNaN	0					Invalid						
	INF	Invalid										
	Norm											
!sNaN	qNaN										qNaN	
All types	sNaN											
SNaN	all types										Invalid	

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

## Possible Exceptions:

- FPU error
- Invalid operation
- Overflow
- Underflow
- Inexact



10.37	FMOV	Floating-point MOVE	Floating-Point Instruction			
	Floating-Point Transfer					
SZ	Format		Summary of Operation	Instruction Code	Execution States	T Bit
0	1. FMOV	FRm,FRn	FRm → FRn	1111nnnnmmmm1100	1	—
1	2. FMOV	DRm,DRn	DRm → DRn	1111nnn0mmm01100	1	—
0	3. FMOV.S	FRm,@Rn	FRm → (Rn)	1111nnnnmmmm1010	1	—
1	4. FMOV	DRm,@Rn	DRm → (Rn)	1111nnn0mmm01010	1	—
0	5. FMOV.S	@Rm,FRn	(Rm) → FRn	1111nnnnmmmm1000	1	—
1	6. FMOV	@Rm,DRn	(Rm) → DRn	1111nnn0mmm01000	1	—
0	7. FMOV.S	@Rm+,FRn	(Rm) → FRn,Rm+=4	1111nnnnmmmm1001	1	—
1	8. FMOV	@Rm+,DRn	(Rm) → DRn,Rm+=8	1111nnn0mmm01001	1	—
0	9. FMOV.S	FRm,@-Rn	Rn-=4,FRm → (Rn)	1111nnnnmmmm1011	1	—
1	10. FMOV	DRm,@-Rn	Rn-=8,DRm → (Rn)	1111nnn0mmm01011	1	—
0	11. FMOV.S	@(R0,Rm),FRn	(R0+Rm) → FRn	1111nnnnmmmm0110	1	—
1	12. FMOV	@(R0,Rm),DRn	(R0+Rm) → DRn	1111nnn0mmm00110	1	—
0	13. FMOV.S	FRm, @(R0,Rn)	FRm → (R0+Rn)	1111nnnnmmmm0111	1	—
1	14. FMOV	DRm, @(R0,Rn)	DRm → (R0+Rn)	1111nnn0mmm00111	1	—

## Description

- 1) This instruction transfers FRm contents to FRn.
- 2) This instruction transfers DRm contents to DRn.
- 3) This instruction transfers FRm contents to memory at address indicated by Rn.
- 4) This instruction transfers DRm contents to memory at address indicated by Rn.
- 5) This instruction transfers contents of memory at address indicated by Rm to FRn.
- 6) This instruction transfers contents of memory at address indicated by Rm to DRn.
- 7) This instruction transfers contents of memory at address indicated by Rm to FRn, and adds 4 to Rm.
- 8) This instruction transfers contents of memory at address indicated by Rm to DRn, and adds 8 to Rm.
- 9) This instruction subtracts 4 from Rn, and transfers FRm contents to memory at address indicated by resulting Rn value.
- 10) This instruction subtracts 8 from Rn, and transfers DRm contents to memory at address indicated by resulting Rn value.
- 11) This instruction transfers contents of memory at address indicated by (R0 + Rm) to FRn.
- 12) This instruction transfers contents of memory at address indicated by (R0 + Rm) to DRn.
- 13) This instruction transfers FRm contents to memory at address indicated by (R0 + Rn).
- 14) This instruction transfers DRm contents to memory at address indicated by (R0 + Rn).

### Operation

```
void FMOV(int m,n)                /* FMOV FRm,FRn */
{
    FR[n] = FR[m];
    pc += 2;
}
void FMOV_DR(int m,n)             /* FMOV DRm,DRn */
{
    DR[n>>1] = DR[m>>1];
    pc += 2;
}
void FMOV_STORE(int m,n)          /* FMOV.S FRm,@Rn */
{
    store_int(FR[m],R[n]);
    pc += 2;
}
void FMOV_STORE_DR(int m,n)       /* FMOV DRm,@Rn */
{
    store_quad(DR[m>>1],R[n]);
    pc += 2;
}
void FMOV_LOAD(int m,n)           /* FMOV.S @Rm,FRn */
{
    load_int(R[m],FR[n]);
    pc += 2;
}
void FMOV_LOAD_DR(int m,n)        /* FMOV @Rm,DRn */
{
    load_quad(R[m],DR[n>>1]);
    pc += 2;
}
void FMOV_RESTORE(int m,n)        /* FMOV.S @Rm+,FRn */
{
    load_int(R[m],FR[n]);
    R[m] += 4;
    pc += 2;
}
void FMOV_RESTORE_DR(int m,n)     /* FMOV @Rm+,DRn */
{
    load_quad(R[m],DR[n>>1]);
    R[m] += 8;
    pc += 2;
}
void FMOV_SAVE(int m,n)           /* FMOV.S FRm,@-Rn */
{
    store_int(FR[m],R[n]-4);
    R[n] -= 4;
    pc += 2;
}
```

```
}
void FMOV_SAVE_DR(int m,n) /* FMOV DRm,@-Rn */
{
    store_quad(DR[m>>1],R[n]-8);
    R[n] -= 8;
    pc += 2;
}
void FMOV_INDEX_LOAD(int m,n) /* FMOV.S @(R0,Rm),FRn */
{
    load_int(R[0] + R[m],FR[n]);
    pc += 2;
}
void FMOV_INDEX_LOAD_DR(int m,n) /*FMOV @(R0,Rm),DRn */
{
    load_quad(R[0] + R[m],DR[n>>1]);
    pc += 2;
}
void FMOV_INDEX_STORE(int m,n) /*FMOV.S FRm,@(R0,Rn)*/
{
    store_int(FR[m], R[0] + R[n]);
    pc += 2;
}
void FMOV_INDEX_STORE_DR(int m,n)/*FMOV DRm,@(R0,Rn)*/
{
    store_quad(DR[m>>1], R[0] + R[n]);
    pc += 2;
}
```

### **Possible Exceptions:**

- Data TLB miss exception
- Data protection violation exception
- Initial write exception
- Address error

10.38	FMOV	Floating-point MOVE extension		Floating-Point Instruction		
	Floating-Point Transfer					
PR	Format		Summary of Operation	Instruction Code	Execution States	T Bit
1	1. FMOV	XDm,@Rn	XRm → (Rn)	1111nnnnmmmm11010	1	—
1	2. FMOV	@Rm,XDn	(Rm) → XDn	1111nnnn1mmmm1000	1	—
1	3. FMOV	@Rm+,XDn	(Rm) → XDn,Rm+=8	1111nnnn1mmmm1001	1	—
1	4. FMOV	XDm,@-Rn	Rn-=8,XDm → (Rn)	1111nnnnmmmm11010	1	—
1	5. FMOV	@(R0,Rm),XDn	(R0+Rm) → XDn	1111nnnnmmmm11011	1	—
1	6. FMOV	XDm,@(R0,Rn)	XDm → (R0+Rn)	1111nnnnmmmm10110	1	—
1	7. FMOV	XDm,XDn	XDm → XDn	1111nnnn1mmmm11100	1	—
1	8. FMOV	XDm,DRn	XDm → DRn	1111nnnn0mmmm11100	1	—
1	9. FMOV	DRm,XDn	DRm → XDn	1111nnnn1mmmm01100	1	—

## Description

- 1) This instruction transfers XDm contents to memory at address indicated by Rn.
- 2) This instruction transfers contents of memory at address indicated by Rm to XDn.
- 3) This instruction transfers contents of memory at address indicated by Rm to XDn, and adds 8 to Rm.
- 4) This instruction subtracts 8 from Rn, and transfers XDm contents to memory at address indicated by resulting Rn value.
- 5) This instruction transfers contents of memory at address indicated by (R0 + Rm) to XDn.
- 6) This instruction transfers XDm contents to memory at address indicated by (R0 + Rn).
- 7) This instruction transfers XDm contents to XDn.
- 8) This instruction transfers XDm contents to DRn.
- 9) This instruction transfers DRm contents to XDn.

## Operation

```
void FMOV_STORE_XD(int m,n)      /* FMOV XDm,@Rn */
{
    store_quad(XD[m>>1],R[n]);
    pc += 2;
}
void FMOV_LOAD_XD(int m,n)       /* FMOV @Rm,XDn */
{
    load_quad(R[m],XD[n>>1]);
    pc += 2;
}
void FMOV_RESTORE_XD(int m,n)    /* FMOV @Rm+,DBn */
{
    load_quad(R[m],XD[n>>1]);
    R[m] += 8;
    pc += 2;
}
void FMOV_SAVE_XD(int m,n)       /* FMOV XDm,@-Rn */
{
    store_quad(XD[m>>1],R[n]-8);
    R[n] -= 8;
    pc += 2;
}
void FMOV_INDEX_LOAD_XD(int m,n) /* FMOV @(R0,Rm),XDn */
{
    load_quad(R[0] + R[m],XD[n>>1]);
    pc += 2;
}
void FMOV_INDEX_STORE_XD(int m,n) /* FMOV XDm,@(R0,Rn) */
{
    store_quad(XD[m>>1], R[0] + R[n]);
    pc += 2;
}
void FMOV_XDXD(int m,n)          /* FMOV XDm,XDn */
{
    XD[n>>1] = XD[m>>1];
    pc += 2;
}
void FMOV_XDDR(int m,n)          /* FMOV XDm,DRn */
{
    DR[n>>1] = XD[m>>1];
    pc += 2;
}
void FMOV_DRXD(int m,n)          /* FMOV DRm,XDn */
{
    XD[n>>1] = DR[m>>1];
    pc += 2;
}
```

## Possible Exceptions:

- Data TLB miss exception
- Data protection violation exception
- Initial write exception
- Address error

10.39	FMUL	Floating-point MULTiply					Floating-Point Instruction	
	Floating-Point Multiplication							
PR	Format		Summary of Operation	Instruction Code	Execution States	T Bit		
0	FMUL	FRm,FRn	FRn*FRm → FRn	1111nnnnmmmm0010	1	—		
1	FMUL	DRm,DRn	DRn*DRm → DRn	1111nnn0mmmm00010	6	—		

## Description

When FPSCR.PR = 0: Arithmetically multiplies the two single-precision floating-point numbers in FRn and FRm, and stores the result in FRn.

When FPSCR.PR = 1: Arithmetically multiplies the two double-precision floating-point numbers in DRn and DRm, and stores the result in DRn.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FMUL(int m,n)
{
    pc += 2;
    clear_cause();
    if((data_type_of(m) == sNaN) ||
        (data_type_of(n) == sNaN)) invalid(n);
    else if((data_type_of(m) == qNaN) ||
        (data_type_of(n) == qNaN)) qnan(n);
    else if((data_type_of(m) == DENORM) ||
        (data_type_of(n) == DENORM)) set_E();
    else switch (data_type_of(m)){
        case NORM: switch (data_type_of(n)){
            case PZERO:
            case NZERO: zero(n,sign_of(m)^sign_of(n)); break;
            case PINF:
            case NINF: inf(n,sign_of(m)^sign_of(n)); break;
            default: normal_fmula(m,n); break;
        }
    }
    break;
}
```

```

    case PZERO:
    case NZERO: switch (data_type_of(n)){
        case PINF:
        case NINF:  invalid(n); break;
        default:    zero(n,sign_of(m)^sign_of(n));break;
    }      break;
    case PINF :
    case NINF : switch (data_type_of(n)){
        case PZERO:
        case NZERO: invalid(n);  break;
        default:    inf(n,sign_of(m)^sign_of(n));break;
    }      break;
}
}

```

## FMUL Special Cases

FRm,DRm	FRn,DRn							
	NORM	+0	−0	+INF	−INF	DENORM	qNaN	sNaN
NORM	DIV	0		INF		Error	qNaN	Invalid
+0	0	+0	−0	Invalid				
−0		−0	+0					
+INF	INF	Invalid		+INF	−INF			
−INF				−INF	+INF			
DENORM	Error							
qNaN	qNaN							
sNaN	Invalid							

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

## Possible Exceptions:

- FPU error
- Invalid operation
- Overflow
- Underflow
- Inexact

10.40	FNEG	Floating-point NEGate value		Floating-Point Instruction	
	Floating-Point Sign Inversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FNEG FRn	-FRn → FRn	1111nnnn01001101	1	—
1	FNEG DRn	-DRn → DRn	1111nnn001001101	1	—

## Description

This instruction inverts the most significant bit (sign bit) of the contents of floating-point register FRn/DRn, and stores the result in FRn/DRn.

The cause and flag fields in FPSCR are not updated.

## Operation

```
void FNEG (int n){  
    FR[n] = -FR[n];  
    pc += 2;  
}
```

/\* Same operation is performed regardless of precision. \*/

## Possible Exceptions:

None

10.41	FRCHG	FR-bit CHanGe	Floating-Point Instruction		
	FR Bit Inversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FRCHG	FRSCR.FR=~FRSCR.FR	1111101111111101	1	—
1	—	—	—	—	—

## Description

This instruction inverts the FR bit in floating-point register FPSCR. When the FR bit in FPSCR is changed, FR0 to FR15 in FPPR0 to FPPR31 become XR0 to XR15, and XR0 to XR15 become FR0 to FR15. When FPSCR.FR = 0, FPPR0 to FPPR15 correspond to FR0 to FR15, and FPPR16 to FPPR31 correspond to XR0 to XR15. When FPSCR.FR = 1, FPPR16 to FPPR31 correspond to FR0 to FR15, and FPPR0 to FPPR15 correspond to XR0 to XR15.



## Operation

```
void FRCHG()    /* FRCHG */
{
    if(FPSCR_PR == 0){
        FPSCR ^= 0x00200000; /* bit 21 */
        PC += 2;
    }
    else undefined_operation();
}
```

## Possible Exceptions:

None

10.42	FSCHG	Sz-bit CHAnGe	Floating-Point Instruction		
	SZ Bit Inversion				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FSCHG	FRSCR.SZ=~FRSCR.SZ	1111001111111101	1	—
1	—	—	—	—	—

## Description

This instruction inverts the SZ bit in floating-point register FPSCR. Changing the SZ bit in FPSCR switches FMOV instruction data transfer between one single-precision data unit and a data pair. When FPSCR.SZ = 0, the FMOV instruction transfers one single-precision data unit. When FPSCR.SZ = 1, the FMOV instruction transfers two single-precision data units as a pair.

## Operation

```
void FSCHG()    /* FSCHG */
{
    if(FPSCR_PR == 0){
        FPSCR ^= 0x00100000; /* bit 20 */
        PC += 2;
    }
    else undefined_operation();
}
```

## Possible Exceptions:

None

10.43	FSQRT	Floating-point Square Root				Floating-Point Instruction		
	Floating-Point Square Root							
PR	Format	Summary of Operation		Instruction Code		Execution States		T Bit
0	FSQRT FRn	$\sqrt{\text{FRn}} \rightarrow \text{FRn}$		1111nnnn01101101		9		—
1	FSQRT DRn	$\sqrt{\text{DRn}} \rightarrow \text{DRn}$		1111nnnn01101101		22		—

## Description

When FPSCR.PR = 0: Finds the arithmetical square root of the single-precision floating-point number in FRn, and stores the result in FRn.

When FPSCR.PR = 1: Finds the arithmetical square root of the double-precision floating-point number in DRn, and stores the result in DRn.

When FPSCR.enable.I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FSQRT(int n){
    pc += 2;
    clear_cause();
    switch(data_type_of(n)){
        case NORM :   if(sign_of(n) == 0) normal_fsqrt(n);
                       else          invalid(n); break;
        case DENORM:  if(sign_of(n) == 0) set_E();
                       else          invalid(n); break;
        case PZERO :
        case NZERO :
        case PINF  :   break;
        case NINF  :   invalid(n); break;
        case qNaN  :   qnan(n);   break;
        case sNaN  :   invalid(n); break;
    }
}

void normal_fsqrt(int n)
{
    union {
        float f;
        int l;
    } dstf,tmpf;
    union {
        double d;
        int l[2];
    }
```

```

    }    dstd,tmpd;
union {
    int double x;
    int l[4];
}
    tmpx;
    if(FPSCR_PR == 0) {
        tmpf.f = FR[n]; /* save destination value */
        dstf.f = sqrt(FR[n]); /* round toward nearest or even */
        tmpd.d = dstf.f; /* convert single to double */
        tmpd.d *= dstf.f;
        if(tmpf.f != tmpd.d) set_I();
        if((tmpf.f < tmpd.d) && (SPSCR_RM == 1))
            dstf.l -= 1; /* round toward zero */
        if(FPSCR & ENABLE_I) fpu_exception_trap();
        else
            FR[n] = dstf.f;
    } else {
        tmpd.d = DR[n>>1]; /* save destination value */
        dstd.d = sqrt(DR[n>>1]); /* round toward nearest or even */
        tmpx.x = dstd.d; /* convert double to int double */
        tmpx.x *= dstd.d;
        if(tmpd.d != tmpx.x) set_I();
        if((tmpd.d < tmpx.x) && (SPSCR_RM == 1)) {
            dstd.l[1] -= 1; /* round toward zero */
            if(dstd.l[1] == 0xffffffff) dstd.l[0] -= 1;
        }
        if(FPSCR & ENABLE_I) fpu_exception_trap();
        else
            DR[n>>1] = dstd.d;
    }
}

```

## FSQRT Special Cases

FRn	+NORM	−NORM	+0	−0	+INF	−INF	qNaN	sNaN
FSQRT(FRn)	SQRT	Invalid	+0	−0	+INF	Invalid	qNaN	Invalid

---

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

---

## Possible Exceptions:

- FPU error
- Invalid operation
- Inexact

10.44	FSTS	Floating-point STore System register	Floating-Point Instruction	
	Transfer from System Register			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
FSTS FPUL,FRn	FPUL → FRn	1111nnnn00001101	1	—

## Description

This instruction transfers the contents of system register FPUL to floating-point register FRn.

## Operation

```
void FSTS(int n, float *FPUL)
{
    FR[n] = *FPUL;
    pc += 2;
}
```

## Possible Exceptions:

None

10.45	FSUB	Floating-point SUBtract		Floating-Point Instruction	
	Floating-Point Subtraction				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FSUB FRm,FRn	FRn-FRm → FRn	1111nnnnmmmm0001	1	—
1	FSUB DRm,DRn	DRn-DRm → DRn	1111nnn0mmmm00001	6	

## Description

When FPSCR.PR = 0: Arithmetically subtracts the single-precision floating-point number in FRm from the single-precision floating-point number in FRn, and stores the result in FRn.

When FPSCR.PR = 1: Arithmetically subtracts the double-precision floating-point number in DRm from the double-precision floating-point number in DRn, and stores the result in DRn.

When FPSCR.enable.O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FSUB (int m,n)
{
    pc += 2;
    clear_cause();
    if((data_type_of(m) == sNaN) ||
        (data_type_of(n) == sNaN)) invalid(n);
    else if((data_type_of(m) == qNaN) ||
        (data_type_of(n) == qNaN)) qnan(n);
    else if((data_type_of(m) == DENORM) ||
        (data_type_of(n) == DENORM)) set_E();
    else switch (data_type_of(m)){
        case NORM: switch (data_type_of(n)){
            case NORM: normal_faddsub(m,n,SUB); break;
            case PZERO:
            case NZERO: register_copy(m,n); FR[n] = -FR[n];break;
            default: break;
        } break;
        case PZERO: break;
        case NZERO: switch (data_type_of(n)){
            case NZERO: zero(n,0); break;
            default: break;
        } break;
        case PINF: switch (data_type_of(n)){
            case PINF: invalid(n); break;
            default: inf(n,1); break;
        } break;
        case NINF: switch (data_type_of(n)){
            case NINF: invalid(n); break;
            default: inf(n,0); break;
        } break;
    }
}
```

## FSUB Special Cases

FRm,DRm	FRn,DRn										
	NORM	+0	−0	+INF	−INF	DENORM	qNaN	sNaN			
NORM	ADD			+INF	−INF	Error	qNaN				
+0									+0		
−0											
+INF	−INF								Invalid		
−INF	+INF				Invalid						
DENORM	Error										
qNaN	qNaN										
sNaN	Invalid										

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

## Possible Exceptions:

- FPU error
- Invalid operation
- Overflow
- Underflow
- Inexact

10.46	FTRC	Floating-point TRuncate and Convert to integer		Floating-Point Instruction	
	Conversion to Integer				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FTRC FRm,FPUL	(long)FRm → FPUL	1111mmmm00111101	1	—
1	FTRC DRm,FPUL	(long)DRm → FPUL	1111mmm000111101	2	—

## Description

When FPSCR.PR = 0: Converts the single-precision floating-point number in FRm to a 32-bit integer, and stores the result in FPUL.

When FPSCR.PR = 1: Converts the double-precision floating-point number in FRm to a 32-bit integer, and stores the result in FPUL.

The rounding mode is always truncation.

When FPSCR.enable.I is set, an FPU exception is generated before the instruction is executed, so appropriate processing should be performed by software.

## Operation

```
#define N_INT_SINGLE_RANGE 0xcf000000 /* -1.000000 * 2^31 */
#define P_INT_SINGLE_RANGE 0x4effffff /* 1.fffffe * 2^30 */
#define N_INT_DOUBLE_RANGE 0xc1e00000 /* higher of -1.0000000000000 * 2^31 */
#define P_INT_DOUBLE_RANGE 0x41dfffff /* higher of 1.ffffffffffffff * 2^30 */

void FTRC(int m, int *FPUL)
{
    pc += 2;
    clear_cause();
    if(FPSCR.PR==0){
        case(ftrc_single_type_of(m)){
            NORM: *FPUL = FR[m];                break;
            PINF: ftrc_invalid(0);                break;
            NINF: ftrc_invalid(1);                break;
        }
    }
    else{ /* case FPSCR.PR=1 */
        case(ftrc_double_type_of(m)){
            NORM: *FPUL = DR[m>>1];                break;
            PINF: ftrc_invalid(0);                break;
            NINF: ftrc_invalid(1);                break;
        }
    }
}

int ftrc_single_type_of(int m)
{
    if(sign_of(m) == 0){
        if(FR_HEX[m] > 0x7f800000) return(NINF); /* NaN */
        else if(FR_HEX[m] > P_INT_SINGLE_RANGE)
            return(PINF); /* out of range,+INF */
        else
            return(NORM); /* +0,+NORM */
    } else {
        if(FR_HEX[m]< N_INT_SINGLE_RANGE)
            return(NINF); /* out of range ,+INF,NaN*/
        else
            return(NORM); /* -0,-NORM */
    }
}

int ftrc_double_type_of(int m)
{
    if(sign_of(m) == 0){
        if((FR_HEX[m] > 0x7ff00000) ||
           ((FR_HEX[m] == 0x7ff00000) &&
            (FR_HEX[m+1] != 0x00000000))) return(NINF); /* NaN */
        else if(FR_HEX[m] > P_INT_DOUBLE_RANGE)
            return(PINF); /* out of range,+INF */
        else
            return(NORM); /* +0,+NORM */
    } else {
```

```

        if(FR_HEX[m] < N_INT_DOUBLE_RANGE)
            return(NINF); /* out of range ,+INF,NaN*/
        else
            return(NORM); /* -0,-NORM */
    }
}

void ftrc_invalid(int sign, int *FPUL)
{
    set_V();
    if((FPSCR & ENABLE_V) == 0){
        if(sign == 0)    *FPUL = 0x7fffffff;
        else            *FPUL = 0x80000000;
    }
    else fpu_exception_trap();
}

```

## FTRC Special Cases

FR <sub>n</sub> ,DR <sub>n</sub>	NORM	+0	−0	Positive Out of Range	Negative Out of Range	+INF	−INF	qNaN	sNaN
FTRC (FR <sub>n</sub> ,DR <sub>n</sub> )	TRC	0	0	Invalid+MAX	Invalid−MAX	Invalid+MAX	Invalid−MAX	Invalid−MAX	Invalid−MAX

**Note:** When DN = 1, the value of a denormalized number is treated as 0.

## Possible Exceptions:

- FPU error
- Invalid operation

10.47	FTRV	Floating-point TRansform Vector		Floating-Point Instruction	
	Vector Transformation				
PR	Format	Summary of Operation	Instruction Code	Execution States	T Bit
0	FTRV XMTRX,FVn	XMTRX*FVn → FVn	1111nn0111111101	4	—
1	—	—	—	—	—

## Description

When FPSCR.PR = 0: This instruction takes the contents of floating-point registers XF0 to XF15 indicated by XMTRX as a 4-row x 4-column matrix, takes the contents of floating-point registers FR[n] to FR[n + 3] indicated by FV<sub>n</sub> as a 4-dimensional vector, multiplies the array by the vector, and stores the results in FV[n].



XMTRX				x	FVn	,	FVn
XF[0]	XF[4]	XF[8]	XF[12]		FR[n]		FR[n]
XF[1]	XF[5]	XF[9]	XF[13]		FR[n+1]		FR[n+1]
XF[2]	XF[6]	XF[10]	XF[14]		FR[n+2]		FR[n+2]
XF[3]	XF[7]	XF[11]	XF[15]		FR[n+3]		FR[n+3]

The FTRV instruction is intended for speed rather than accuracy, and therefore the results will differ from those obtained by using a combination of FADD and FMUL instructions. The FTRV execution sequence is as follows:

- 1) Multiplies all terms. The results are 30 bits long.
- 2) Aligns these results, rounding them to fit within 28 bits.
- 3) Adds the aligned values.
- 4) Performs normalization and rounding.

Special processing is performed in the following cases:

- 1) If an input value is an sNaN, an invalid exception is generated.
- 2) If the input values to be multiplied include a combination of 0 and infinity, an invalid operation exception is generated.
- 3) In cases other than the above, if the input values include a qNaN, the result will be a qNaN.
- 4) In cases other than the above, if the input values include infinity:
  - a) If multiplication results in two or more infinities and the signs are different, an invalid exception will be generated.
  - b) Otherwise, correct infinities will be stored.
5. If the input values do not include an sNaN, qNaN, or infinity, processing is performed in the normal way.

When FPSCR.enable.V/O/U/I is set, an FPU exception trap is generated regardless of whether or not an exception has occurred. When an exception occurs, correct exception information is reflected in FPSCR.cause and FPSCR.flag, and FRn or DRn is not updated. Appropriate processing should therefore be performed by software.

## Operation

```
void FTRV (int n) /* FTRV FVn */
{
    float saved_vec[4],result_vec[4];
    int saved_fpscr;
    int dst,i;
    if(FPSCR_PR == 0)    {
        PC += 2;
        clear_cause();
        saved_fpscr = FPSCR;
        FPSCR &= ~ENABLE_VOUI; /* mask VOUI enable */
        dst = 12 - n; /* select other vector than FVn */
        for(i=0;i<4;i++)          saved_vec [i] = FR[dst+i];
        for(i=0;i<4;i++)          {
```

```
        for(j=0;j<4;j++) FR[dst+j] = XF[i+4j];
        fipr(n,dst);
        saved_fpscr |= FPSCR & (CAUSE|FLAG) ;
        result_vec [i] = FR[dst+3];
    }
    for(i=0;i<4;i++)          FR[dst+i] = saved_vec [i];
    FPSCR = saved_fpscr;
    if(FPSCR & ENABLE_VOUI) fpu_exception_trap();
    else    for(i=0;i<4;i++)  FR[n+i] = result_vec [i];
}
else undefined_operation();
}
```

### Possible Exceptions:

- Invalid operation
- Overflow
- Underflow
- Inexact

10.48	JMP	JuMP	Branch Instruction	
	Unconditional Branch		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
JMP @Rn	Rn → PC	0100nnnn00101011	2	—

### Description

Unconditionally makes a delayed branch to the address specified by Rn.

### Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

### Operation

```
JMP(int n)          /* JMP @Rn */
{
    unsigned int temp;

    temp=PC;
    PC=R[n];
    Delay_Slot(temp+2);
}
```

## Example

```

MOV.L  JMP_TABLE,R0      ;R0 = TRGET address
JMP      @R0             ;Branch to TRGET.
MOV      R0,R1           ;MOV executed before branch.
.align   4
JMP_TABLE:               .data.l   TRGET      ;Jump table
.....
TRGET:      ADD          #1,R1  ;← Branch destination

```

10.49	JSR	Jump to SubRoutine	Branch Instruction	
	Branch to Subroutine Procedure Delayed Branch Instruction			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
JSR @Rn	PC+4 → PR, Rn → PC	0100nnnn00001011	2	—

## Description

This instruction makes a delayed branch to the subroutine procedure at the specified address after execution of the following instruction. Return address (PC + 4) is saved in PR, and a branch is made to the address indicated by general register Rn. JSR is used in combination with RTS for subroutine procedure calls.

## Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

## Operation

```

JSR(int n)          /* JSR @Rn */
{
    unsigned int temp;

    temp=PC;
    PR=PC+4;
    PC=R[n];
    Delay_Slot(temp+2);
}

```

## Example

```

MOV.L    JSR_TABLE,R0    ;R0 = TRGET address
JSR      @R0              ;Branch to TRGET.
XOR      R1,R1            ;XOR executed before branch.
ADD      R0,R1            ;← Procedure return destination (PR contents)
.....
.align   4
JSR_TABLE: .data.l    TRGET      ;Jump table
TRGET:    NOP           ;← Entry to procedure
MOV      R2,R3           ;
RTS      ;Return to above ADD instruction.
MOV      #70,R1          ;MOV executed before RTS.

```

10.50	LDC	LoaD to Control register	System Control Instruction	
	Load to Control Register			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
LDC Rm, SR	Rm → SR	0100mmmm00001110	4	LSB
LDC Rm, GBR	Rm → GBR	0100mmmm00011110	3	—
LDC Rm, VBR	Rm → VBR	0100mmmm00101110	1	—
LDC Rm, SSR	Rm → SSR	0100mmmm00111110	1	—
LDC Rm, SPC	Rm → SPC	0100mmmm01001110	1	
LDC Rm, DBR	Rm → DBR	0100mmmm11111010	1	—
LDC Rm, R0_BANK	Rm → R0_BANK	0100mmmm10001110	1	—
LDC Rm, R1_BANK	Rm → R1_BANK	0100mmmm10011110	1	—
LDC Rm, R2_BANK	Rm → R2_BANK	0100mmmm10101110	1	—
LDC Rm, R3_BANK	Rm → R3_BANK	0100mmmm10111110	1	—
LDC Rm, R4_BANK	Rm → R4_BANK	0100mmmm11001110	1	—
LDC Rm, R5_BANK	Rm → R5_BANK	0100mmmm11011110	1	—
LDC Rm, R6_BANK	Rm → R6_BANK	0100mmmm11101110	1	—
LDC Rm, R7_BANK	Rm → R7_BANK	0100mmmm11111110	1	—
LDC.L @Rm+, SR	(Rm) → SR, Rm+4 → Rm	0100mmmm00000111	4	LSB
LDC.L @Rm+, GBR	(Rm) → GBR, Rm+4 → Rm	0100mmmm00010111	3	—
LDC.L @Rm+, VBR	(Rm) → VBR, Rm+4 → Rm	0100mmmm00100111	1	—

10.50	LDC	Load to Control register	System Control Instruction	
LDC.L @Rm+, SSR	(Rm) → SSR, Rm+4 → Rm	0100mmmm00110111	1	—
LDC.L @Rm+, SPC	(Rm) → SPC, Rm+4 → Rm	0100mmmm01000111	1	—
LDC.L @Rm+, DBR	(Rm) → DBR, Rm+4 → Rm	0100mmmm11110110	1	—
LDC.L @Rm+, R0_BANK	(Rm) → R0_BANK, Rm+4 → Rm	0100mmmm10000111	1	—
LDC.L @Rm+, R1_BANK	(Rm) → R1_BANK, Rm+4 → Rm	0100mmmm10010111	1	—
LDC.L @Rm+, R2_BANK	(Rm) → R2_BANK, Rm+4 → Rm	0100mmmm10100111	1	—
LDC.L @Rm+, R3_BANK	(Rm) → R3_BANK, Rm+4 → Rm	0100mmmm10110111	1	—
LDC.L @Rm+, R4_BANK	(Rm) → R4_BANK, Rm+4 → Rm	0100mmmm11000111	1	—
LDC.L @Rm+, R5_BANK	(Rm) → R5_BANK, Rm+4 → Rm	0100mmmm11010111	1	—
LDC.L @Rm+, R6_BANK	(Rm) → R6_BANK, Rm+4 → Rm	0100mmmm11100111	1	—
LDC.L @Rm+, R7_BANK	(Rm) → R7_BANK, Rm+4 → Rm	0100mmmm11110111	1	—

## Description

These instructions store the source operand in the control register SR, GBR, VBR, SSR, SPC, DBR, or R0\_BANK to R7\_BANK. With the exception of LDC Rm,GBR and LDC.L @-Rn,GBR, the LDC/LDC.L instructions are privileged instructions and can only be used in privileged mode. Use in user mode will cause an illegal instruction exception. However, LDC Rm,GBR and LDC.L @-Rm,GBR can also be used in user mode.

With LDC/LDC.L instructions accessing Rn\_BANK, Rn\_BANK0 is accessed when the RB bit in the SR register is 1, and Rn\_BANK1 is accessed when this bit is 0.

## Operation

```

LDCSR(int m) /* LDC Rm,SR : Privileged */
{
    SR=R[m]&0x700083F3;
    PC+=2;
}

LDCGBR(int m) /* LDC Rm,GBR */
{
    GBR=R[m];
    PC+=2;
}

```

```
LDCVBR(int m) /* LDC Rm,VBR : Privileged */
{
    VBR=R[m];
    PC+=2;
}

LDCSSR(int m) /* LDC Rm,SSR : Privileged */
{
    SSR=R[m],
    PC+=2;
}

LDCSPC(int m) /* LDC Rm,SPC : Privileged */
{
    SPC=R[m];
    PC+=2;
}

LDCDBR(int m) /* LDC Rm,DBR : Privileged */
{
    DBR=R[m];
    PC+=2;
}

LDCRn_BANK(int m) /* LDC Rm,Rn_BANK : Privileged */
/* n=0-7 */
{
    Rn_BANK=R[m];
    PC+=2;
}

LDCMSR(int m) /* LDC.L @Rm+,SR : Privileged */
{
    SR=Read_Long(R[m])&0x700083F3;
    R[m]+=4;
    PC+=2;
}

LDCMGBR(int m) /* LDC.L @Rm+,GBR */
{
    GBR=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDCMVBR(int m) /* LDC.L @Rm+,VBR : Privileged */
{
    VBR=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}
```

```
LDCMSSR(int m) /* LDC.L @Rm+,SSR : Privileged */
{
    SSR=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDCMSPC(int m) /* LDC.L @Rm+,SPC : Privileged */
{
    SPC=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDCMDBR(int m) /* LDC.L @Rm+,DBR : Privileged */
{
    DBR=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDCMRn_BANK(Long m) /* LDC.L @Rm+,Rn_BANK : Privileged */
/* n=0-7 */
{
    Rn_BANK=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}
```

### **Possible Exceptions:**

- General illegal instruction exception
- Illegal slot instruction exception
- Data TLB miss exception
- Data TLB protection violation exception
- Address error

10.51.1	LDS	Load to FPU System register	System Control Instruction		
	Load to FPU System Register				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
LDS	Rm,FPUL	Rm → FPUL	0100mmmm01011010	1	—
LDS.L	@Rm+,FPUL	(Rm) → FPUL, Rm+4 → Rm	0100mmmm01010110	1	—
LDS	Rm,FPSCR	Rm → FPSCR	0100mmmm01101010	1	—
LDS.L	@Rm+,FPSCR	(Rm) → FPSCR, Rm+4 → Rm	0100mmmm01100110	1	—

## Description

This instruction loads the source operand into FPU system registers FPUL and FPSCR.

## Operation

```
#define FPSCR_MASK 0x003FFFFFFF

LDSFPUL(int m, int FPUL) /* LDS Rm,FPUL */
{
    *FPUL=R[m];
    PC+=2;
}
LDSMFPUL(int m, int FPUL) /* LDS.L @Rm+,FPUL */
{
    *FPUL=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}
LDSFPSCR(int m) /* LDS Rm,FPSCR */
{
    FPSCR=R[m] & FPSCR_MASK;
    PC+=2;
}
LDSMFPSCR(int m) /* LDS.L @Rm+,FPSCR */
{
    FPSCR=Read_Long(R[m]) & FPSCR_MASK;
    R[m]+=4;
    PC+=2;
}
```



## Possible Exceptions:

- Data TLB miss exception
- Data access protection exception
- Address error

10.51.2	LDS	Load to System register	System Control Instruction		
	Load to System Register				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
LDS	Rm,MACH	Rm → MACH	0100mmmm00001010		—
LDS	Rm,MACL	Rm → MACL	0100mmmm00011010		—
LDS	Rm,PR	Rm→ PR	0100mmmm00101010		—
LDS.L	@Rm+,MACH	(Rm) → MACH, Rm + 4 → Rm	0100mmmm00000110		—
LDS.L	@Rm+,MACL	(Rm) → MACL, Rm + 4 → Rm	0100mmmm00010110		—
LDS.L	@Rm+,PR	(Rm) → PR, Rm + 4 → Rm	0100mmmm00100110		—

## Description

Stores the source operand into the system registers MACH, MACL, or PR.

## Operation

```

LDSTMACH(int m) /* LDS Rm,MACH */
{
    MACH=R[m];
    PC+=2;
}

LDSTMACL(int m) /* LDS Rm,MACL */
{
    MACL=R[m];
    PC+=2;
}

LDSPR(int m) /* LDS Rm,PR */
{
    PR=R[m];
    PC+=2;
}

LDSTMACH(int m) /* LDS.L @Rm+,MACH */

```

```
{
    MACH=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDSMMACL(int m) /* LDS.L @Rm+,MACL */
{
    MACL=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}

LDSMPR(int m) /* LDS.L @Rm+,PR */
{
    PR=Read_Long(R[m]);
    R[m]+=4;
    PC+=2;
}
```

Example

```
LDS      R0,PR      ; Before execution    R0 = H'12345678, PR = H'00000000
                        ; After execution   PR = H'12345678
LDS.L    @R15+,MACL ; Before execution    R15 = H'10000000
                        ; After execution   R15 = H'10000004, MACL = (H'10000000)
```

Description

10.52	LDTLB	LoaD PTEH/PTEL/PTEA to TLB	System Control Instruction (Privileged Instruction)	
	Load to TLB			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
LDTLB	PTEH/PTEL/PTEA → TLB	0000000000111000	1	—

This instruction loads the contents of the PTEH/PTEL/PTEA registers into the TLB (translation lookaside buffer) specified by MMUCR.URC (random counter field in the MMC control register).

LDTLB is a privileged instruction, and can only be used in privileged mode. Use of this instruction in user mode will cause an illegal instruction exception.

## Notes

As this instruction loads the contents of the PTEH/PTEL/PTEA registers into a TLB, it should be used either with the MMU disabled, or in the P1 or P2 virtual space with the MMU enabled (see section 3, Memory Management Unit, for details). After this instruction is issued, there must be at least one instruction between the LDTLB instruction and issuance of an instruction relating to address to areas P0, U0, and P3 (i.e. BRAF, BSRF, JMP, JSR, RTS, or RTE).

## Operation

```
LDTLB( ) /*LDTLB */
{
    TLB[MMUCR. URC] .ASID=PTEH & 0x000000FF;
    TLB[MMUCR. URC] .VEN=(PTEH & 0xFFFFFC00)>>10;
    TLB[MMUCR. URC] .PPN=(PTEH & 0x1FFFFC00)>>10;
    TLB[MMUCR. URC] .SZ=(PTEL & 0x00000080)>>6 |
        (PTEL & 0x00000010)>>4;
    TLB[MMUCR. URC] .SH=(PTEH & 0x00000002)>>1;
    TLB[MMUCR. URC] .PR=(PTEH & 0x00000060)>>5;
    TLB[MMUCR. URC] .WT=(PTEH & 0x00000001);
    TLB[MMUCR. URC] .C=(PTEH & 0x00000008)>>3;
    TLB[MMUCR. URC] .D=(PTEH & 0x00000004)>>2;
    TLB[MMUCR. URC] .V=(PTEH & 0x00000100)>>8;
    TLB[MMUCR. URC] .SA=(PTEA & 0x00000007);
    TLB[MMUCR. URC] .TC=(PTEA & 0x00000008)>>3;

    PC+=2;
}
```

## Example

```
MOV    @R0,R1      ;Load page table entry (upper) into R1
MOV    R1,@R2      ;Load R1 into PTEH; R2 is PTEH address (H'FFFFFFF0)
LDTLB                ;Load PTEH, PTEL, PTEA registers into TLB
```

10.53	MAC.L	Multiply and ACcumulate Long	Arithmetic Instruction	
	Double-Precision Multiply-and-Accumulate Operation			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
MAC.L @Rm+,@Rn+	Signed, (Rn) x (Rm) + MAC ' MAC Rn + 4 ' Rn, Rm + 4 ' Rm	0000nnnnmmmm1111	2–5	—

### Description

This instruction performs signed multiplication of the 32-bit operands whose addresses are the contents of general registers Rm and Rn, adds the 64-bit result to the MAC register contents, and stores the result in the MAC register. Operands Rm and Rn are each incremented by 4 each time they are read.

If the S bit is 0, the 64-bit result is stored in the linked MACH and MACL registers.

If the S bit is 1, the addition to the MAC register contents is a saturation operation at the 48th bit from the LSB. In a saturation operation, only the lower 48 bits of the MAC register are valid, and the result range is limited to H'FFFF800000000000 (minimum value) to H'00007FFFFFFF (maximum value).

### Operation

```
MACL(long m, long n) /* MAC.L @Rm+,@Rn+ */
{
    unsigned long RnL,RnH,RmL,RmH,Res0,Res1,Res2;
    unsigned long temp0,temp1,temp2,temp3;
    long tempm,tempn,fnLmL;

    tempn=(long)Read_Long(R[n]);
    R[n]+=4;
    tempm=(long)Read_Long(R[m]);
    R[m]+=4;

    if ((long)(tempn*tempm)<0) fnLmL=-1;
    else fnLmL=0;
    if (tempn<0) tempn=0-tempn;
    if (tempm<0) tempm=0-tempm;

    temp1=(unsigned long)tempn;
    temp2=(unsigned long)tempm;

    RnL=temp1&0x0000FFFF;
    RnH=(temp1>>16)&0x0000FFFF;
    RmL=temp2&0x0000FFFF;
    RmH=(temp2>>16)&0x0000FFFF;
    temp0=RmL*RnL;
    temp1=RmH*RnL;
    temp2=RmL*RnH;
    temp3=RmH*RnH;

    Res2=0;

    Res1=temp1+temp2;
    if (Res1<temp1) Res2+=0x00010000;

    temp1=(Res1<<16)&0xFFFF0000;
    Res0=temp0+temp1;
    if (Res0<temp0) Res2++;
}
```

```
Res2=Res2+((Res1>>16)&0x0000FFFF)+temp3;

if(fnLmL<0){
    Res2=~Res2;
    if (Res0==0) Res2++;
    else Res0=(~Res0)+1;
}
if(S==1){
    Res0=MACL+Res0;
    if (MACL>Res0) Res2++;
    if (MACH&0x00008000);
    else Res2+=MACH|0xFFFF0000;
        Res2+=MACH&0x00007FFF;

    if(((long)Res2<0)&&(Res2<0xFFFF8000)){
        Res2=0xFFFF8000;
        Res0=0x00000000;
    }
    if(((long)Res2>0)&&(Res2>0x00007FFF)){
        Res2=0x00007FFF;
        Res0=0xFFFFFFFF;
    };

    MACH=(Res2&0x0000FFFF)|(MACH&0xFFFF0000);
    MACL=Res0;
}
else {
    Res0=MACL+Res0;
    if (MACL>Res0) Res2++;
    Res2+=MACH;

    MACH=Res2;
    MACL=Res0;
}
PC+=2;
}
```

## Example

```

        MOVA      TBLM,R0;Get table address
        MOV       R0,R1          ;
        MOVA      TBLN,R0          ;Get table address
        CLRMAC    ;MAC register initialization
        MAC.L     @R0+,@R1+      ;
        MAC.L     @R0+,@R1+      ;
        STS       MACL,R0        ;Get result in R0
        .....
        .align    2              ;
TBLM     .data.l    H'1234ABCD    ;
        .data.l    H'5678EF01    ;
TBLN     .data.l    H'0123ABCD    ;
        .data.l    H'4567DEF0    ;

```

10.54	MAC.W	Multiply and ACcumulate Word	Arithmetic Instruction		
	Single-Precision Multiply-and-Accumulate Operation				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MAC.W MAC	@Rm+,@Rn+ @Rm+,@Rn+	Signed, (Rn) x (Rm) + MAC →MAC Rn + 2 → Rn, Rm + 2 → Rm	0100nnnnmmmm1111	2–5	—

## Description

This instruction performs signed multiplication of the 16-bit operands whose addresses are the contents of general registers Rm and Rn, adds the 32-bit result to the MAC register contents, and stores the result in the MAC register. Operands Rm and Rn are each incremented by 2 each time they are read.

If the S bit is 0, a 16 × 16 + 64 → 64-bit multiply-and-accumulate operation is performed, and the 64-bit result is stored in the linked MACH and MACL registers.

If the S bit is 1, a 16 × 16 + 32 → 32-bit multiply-and-accumulate operation is performed, and the addition to the MAC register contents is a saturation operation. In a saturation operation, only the MACL register is valid, and the result range is limited to H'80000000 (minimum value) to H'7FFFFFFF (maximum value). If overflow occurs, the LSB of the MACH register is set to 1. H'80000000 (minimum value) is stored in the MACL register if the result overflows in the negative direction, and H'7FFFFFFF (maximum value) is stored if the result overflows in the positive direction.

## Notes

If the S bit is 0, a 16 × 16 + 64 → 64-bit multiply-and-accumulate operation is performed.

## Operation

```
MACW(long m, long n) /* MAC.W @Rm+,@Rn+ */
{
    long tempm,tempn,dest,src,ans;
    unsigned long templ;
    tempn=(long)Read_Word(R[n]);
    R[n]+=2;
    tempm=(long)Read_Word(R[m]);
    R[m]+=2;
    templ=MACL;
    tempm=((long)(short)tempn*((long)(short)tempm);
    if ((long)MACL>=0) dest=0;
    else dest=1;
    if ((long)tempm>=0) {
        src=0;
        tempn=0;
    }
    else {
        src=1;
        tempn=0xFFFFFFFF;
    }
    src+=dest;
    MACL+=tempm;
    if ((long)MACL>=0) ans=0;
    else ans=1;
    ans+=dest;
    if (S==1) {
        if (ans==1) {
            if (src==0) MACL=0x7FFFFFFF;
            if (src==2) MACL=0x80000000;
        }
    }
    else {
        MACH+=tempn;
        if (templ>MACL) MACH+=1;
    }
    PC+=2;
}
```

## Example

```

MOV      TBLM,R0      ;Get table address
MOV      R0,R1        ;
MOV      TBLN,R0      ;Get table address
CLRMAC   ;MAC register initialization
MAC.W    @R0+,@R1+    ;
MAC.W    @R0+,@R1+    ;
STS      MACL,R0      ;Get result in R0
.....
.align   2            ;
TBLM     .data.w       H'1234      ;
         .data.w       H'5678      ;
TBLN     .data.w       H'0123      ;
         .data.w       H'4567      ;

```

10.55	MOV	MOVE Data	Data Transfer Instruction		
	Data Transfer				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MOV	Rm,Rn	Rm → Rn	0110nnnnmmmm0011	1	—
MOV.B	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0000	1	—
MOV.W	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0001	1	—
MOV.L	Rm,@Rn	Rm → (Rn)	0010nnnnmmmm0010	1	—
MOV.B	@Rm,Rn	(Rm) sign extension Rn	0110nnnnmmmm0000	1	—
MOV.W	@Rm,Rn	(Rm) sign extension Rn	0110nnnnmmmm0001	1	—
MOV.L	@Rm,Rn	(Rm) → Rn	0110nnnnmmmm0010	1	—
MOV.B	Rm,@-Rn	Rn-1 → Rn, Rm → (Rn )	0010nnnnmmmm0100	1	—
MOV.W	Rm,@-Rn	Rn-2 → Rn, Rm → (Rn )	0010nnnnmmmm0101	1	—
MOV.L	Rm,@-Rn	Rn-4 → Rn, Rm → (Rn)	0010nnnnmmmm0110	1	—
MOV.B	@Rm+,Rn	(Rm) sign extension Rn, Rm+1 → Rm	0110nnnnmmmm0100	1	—
MOV.W	@Rm+,Rn	(Rm) sign extension Rn,Rm+2 → Rm	0110nnnnmmmm0101	1	—
MOV.L	@Rm+,Rn	(Rm) → Rn, Rm+4 → Rm	0110nnnnmmmm0110	1	—
MOV.B	Rm,@(R0,Rn)	Rm → (R0+Rn)	0000nnnnmmmm0100	1	—
MOV.W	Rm,@(R0,Rn)	Rm → (R0+Rn)	0000nnnnmmmm0101	1	—



10.55	MOV	MOVe Data		Data Transfer Instruction	
MOV.L	Rm,@(R0,Rn)	Rm → (R0+Rn)	0000nnnnmmmm0110	1	—
MOV.B	@(R0,Rm),Rn	(R0+Rm) sign extension Rn	0000nnnnmmmm1100	1	—
MOV.W	@(R0,Rm),Rn	(R0+Rm) sign extension Rn	0000nnnnmmmm1101	1	—
MOV.L	@(R0,Rm),Rn	(R0+Rm) → Rn	0000nnnnmmmm1110	1	—

## Description

This instruction transfers the source operand to the destination. When an operand is memory, the data size can be specified as byte, word, or longword. When the source operand is memory, the loaded data is sign-extended to longword before being stored in the register.

## Operation

```
MOV(long m, long n) /* MOV Rm,Rn */
{
    R[n]=R[m];
    PC+=2;
}

MOVBS(long m, long n) /* MOV.B Rm,@Rn */
{
    Write_Byte(R[n],R[m]);
    PC+=2;
}

MOVWS(long m, long n) /* MOV.W Rm,@Rn */
{
    Write_Word(R[n],R[m]);
    PC+=2;
}

MOVLS(long m, long n) /* MOV.L Rm,@Rn */
{
    Write_Long(R[n],R[m]);
    PC+=2;
}

MOVBL(long m, long n) /* MOV.B @Rm,Rn */
{
    R[n]=(long)Read_Byte(R[m]);
    if ((R[n]&0x80)==0) R[n]&=0x000000FF;
    else R[n]|=0xFFFFF00;
    PC+=2;
}
```

```
MOVWL(long m, long n) /* MOV.W @Rm,Rn */
{
    R[n]=(long)Read_Word(R[m]);
    if ((R[n]&0x8000)==0) R[n]&=0x0000FFFF;
    else R[n]|=0xFFFF0000;
    PC+=2;
}

MOVLl(long m, long n) /* MOV.L @Rm,Rn */
{
    R[n]=Read_Long(R[m]);
    PC+=2;
}

MOVBM(long m, long n) /* MOV.B Rm,@-Rn */
{
    Write_Byte(R[n]-1,R[m]);
    R[n]-=1;
    PC+=2;
}

MOVWM(long m, long n) /* MOV.W Rm,@-Rn */
{
    Write_Word(R[n]-2,R[m]);
    R[n]-=2;
    PC+=2;
}

MOVLm(long m, long n) /* MOV.L Rm,@-Rn */
{
    Write_Long(R[n]-4,R[m]);
    R[n]-=4;
    PC+=2;
}

MOVBP(long m, long n) /* MOV.B @Rm+,Rn */
{
    R[n]=(long)Read_Byte(R[m]);
    if ((R[n]&0x80)==0) R[n]&=0x000000FF;
    else R[n]|=0xFFFF00;
    if (n!=m) R[m]+=1;
    PC+=2;
}

MOVWP(long m, long n) /* MOV.W @Rm+,Rn */
{
    R[n]=(long)Read_Word(R[m]);
    if ((R[n]&0x8000)==0) R[n]&=0x0000FFFF;
    else R[n]|=0xFFFF0000;
    if (n!=m) R[m]+=2;
}
```

```
    PC+=2;
}

MOVLPL(long m, long n) /* MOV.L @Rm+,Rn */
{
    R[n]=Read_Long(R[m]);
    if (n!=m) R[m]+=4;
    PC+=2;
}

MOVBS0(long m, long n) /* MOV.B Rm,@(R0,Rn) */
{
    Write_Byte(R[n]+R[0],R[m]);
    PC+=2;
}

MOVWS0(long m, long n) /* MOV.W Rm,@(R0,Rn) */
{
    Write_Word(R[n]+R[0],R[m]);
    PC+=2;
}

MOVLS0(long m, long n) /* MOV.L Rm,@(R0,Rn) */
{
    Write_Long(R[n]+R[0],R[m]);
    PC+=2;
}

MOVBLO(long m, long n) /* MOV.B @(R0,Rm),Rn */
{
    R[n]=(long)Read_Byte(R[m]+R[0]);
    if ((R[n]&0x80)==0) R[n]&=0x000000FF;
    else R[n]|=0xFFFFF00;
    PC+=2;
}

MOVWLO(long m, long n) /* MOV.W @(R0,Rm),Rn */
{
    R[n]=(long)Read_Word(R[m]+R[0]);
    if ((R[n]&0x8000)==0) R[n]&=0x0000FFFF;
    else R[n]|=0xFFFF0000;
    PC+=2;
}

MOVLL0(long m, long n) /* MOV.L @(R0,Rm),Rn */
{
    R[n]=Read_Long(R[m]+R[0]);
    PC+=2;
}
```

## Example

MOV	R0,R1	;Before execution	R0 = H'FFFFFFFF, R1 = H'00000000
		;After execution	R1 = H'FFFFFFFF
MOV.W	R0,@R1	;Before execution	R0 = H'FFFF7F80
		;After execution(	R1) = H'7F80
MOV.B	@R0,R1	;Before execution(	R0) = H'80, R1 = H'00000000
		;After execution	R1 = H'FFFFFF80
MOV.W	R0,@-R1	;Before execution	R0 = H'AAAAAAAA, (R1) = H'FFFF7F80
		;After execution	R1 = H'FFFF7F7E, (R1) = H'AAAA
MOV.L	@R0+,R1	;Before execution	R0 = H'12345670
		;After execution	R0 = H'12345674, R1 = (H'12345670)
MOV.B	R1,@(R0,R2)	;Before execution	R2 = H'00000004, R0 = H'10000000
		;After execution	R1 = (H'10000004)
MOV.W	@(R0,R2),R1	;Before execution	R2 = H'00000004, R0 = H'10000000
		;After execution	R1 = (H'10000004)

10.56	MOV	MOVE constant value	Data Transfer Instruction		
	Immediate Data Transfer				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MOV	#imm,Rn	imm sign extension Rn	1110nnnniiiiiii	1	—
MOV.W	@(disp,PC),Rn	(dispx2+PC+4) → sign extension Rn	1001nnnnddddddd	1	—
MOV.L	@(disp,PC),Rn	(dispx4+PC+4) → Rn	1101nnnnddddddd	1	—

## Description

This instruction stores immediate data, sign-extended to longword, in general register Rn. In the case of word or longword data, the data is stored from memory address (PC + 4 + displacement ×2) or (PC + 4 + displacement ¥ 4).

With word data, the 8-bit displacement is multiplied by two after zero-extension, and so the relative distance from the table is in the range up to PC + 4 + 510 bytes. The PC value is the address of this instruction.

With longword data, the 8-bit displacement is multiplied by four after zero-extension, and so the relative distance from the operand is in the range up to PC + 4 + 1020 bytes. The PC value is the address of this instruction. A value with the lower 2 bits adjusted to B'00 is used in address calculation.

## Notes

If a PC-relative load instruction is executed in a delay slot, an illegal slot instruction exception will be generated.

## Operation

```

MOVI(int i, int n) /* MOV #imm,Rn */
{
    if ((i&0x80)==0) R[n]=(0x000000FF & i);
    else R[n]=(0xFFFFF00 | i);
    PC+=2;
}

MOVWI(d, n) /* MOV.W @(disp,PC),Rn */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    R[n]=(int)Read_Word(PC+4+(disp<<1));
    if ((R[n]&0x8000)==0) R[n]&=0x0000FFFF;
    else R[n]|=0xFFFF0000;
    PC+=2;
}

MOVLI(int d, int n)/* MOV.L @(disp,PC),Rn */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & (int)d);
    R[n]=Read_Long((PC&0xFFFFF000)+4+(disp<<2));
    PC+=2;
}

```

## Example

Address				
1000	MOV	#H'80,R1	;R1 = H'FFFFFF80	
1002	MOV.W	IMM,R2	;R2 = H'FFFF9ABC	IMM means (PC + 4 + H'08)
1004	ADD	#-1,R0	;	
1006	TST	R0,R0	;	
1008	MOV.L	@(3,PC),R3	;R3 = H'12345678	
100A	BRA	NEXT	;Delayed branch instruction	
100C	NOP			
100E	IMM	.data.w	H'9ABC	;
1010		.data.w	H'1234	;
1012	NEXT	JMP	@R3	;BRA branch instruction
1014		CMP/EQ	#0,R0	;
		.align	4	;
1018		.data.l	H'12345678	;
101C		.data.l	H'9ABCDEF0	;

10.57	MOV	MOVE global data	Data Transfer Instruction		
	Global Data Transfer				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MOV.B	@(disp,GBR),R0	(disp+GBR) → sign extension R0	11000100dddddddd	1	—
MOV.W	@(disp,GBR), R0	(dispx2+GBR) → sign extension R0	11000101dddddddd	1	—
MOV.L	@(disp,GBR),R0	(dispx4+GBR) → R0	11000110dddddddd	1	—
MOV.B	R0,@(disp,GBR)	R0 → (disp+GBR)	11000000dddddddd	1	—
MOV.W	R0,@(disp,GBR)	R0 → (dispx2+GBR)	11000001dddddddd	1	—
MOV.L	R0,@(disp,GBR)	R0 → (dispx4+GBR)	11000010dddddddd	1	—

## Description

This instruction transfers the source operand to the destination. Byte, word, or longword can be specified as the data size, but the register is always R0. If the transfer data is byte-size, the 8-bit displacement is only zero-extended, so a range up to +255 bytes can be specified. If the transfer data is word-size, the 8-bit displacement is multiplied by two after zero-extension, enabling a range up to +510 bytes to be specified. With longword transfer data, the 8-bit displacement is multiplied by four after zero-extension, enabling a range up to +1020 bytes to be specified.

When the source operand is memory, the loaded data is sign-extended to longword before being stored in the register.

## Notes

When loading, the destination register is always R0.

## Operation

```
MOVB LG(int d) /* MOV.B @(disp,GBR),R0 */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    R[0]=(int)Read_Byte(GBR+disp);
    if ((R[0]&0x80)==0) R[0]&=0x000000FF;
    else R[0]|=0xFFFFF00;
    PC+=2;
}

MOVW LG(int d) /* MOV.W @(disp,GBR),R0 */
{
```

```
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);

    R[0]=(int)Read_Word(GBR+(disp<<1));
    if ((R[0]&0x8000)==0) R[0]&=0x0000FFFF;
    else R[0]|=0xFFFF0000;
    PC+=2;
}

MOVLG(int d) /* MOV.L @(disp,GBR),R0 */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    R[0]=Read_Long(GBR+(disp<<2));
    PC+=2;
}

MOVBSG(int d) /* MOV.B R0,@(disp,GBR) */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    Write_Byte(GBR+disp,R[0]);
    PC+=2;
}

MOVWSG(int d) /* MOV.W R0,@(disp,GBR) */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    Write_Word(GBR+(disp<<1),R[0]);
    PC+=2;
}

MOVLSG(int d) /* MOV.L R0,@(disp,GBR) */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & (long)d);
    Write_Long(GBR+(disp<<2),R[0]);
    PC+=2;
}
```

## Example

MOV.L	@(2,GBR),R0	;Before execution	@(GBR+8) = H'12345670
		;After execution	R0 = @H'12345670
MOV.B	R0,@(1,GBR);	Before execution	R0 = H'FFFF7F80
		;After execution	@(GBR+1) = H'FFFF7F80

10.58	MOV	MOVe structure data	Data Transfer Instruction		
	Structure Data Transfer				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MOV.B	R0,@(disp,Rn)	R0 → (disp+Rn)	10000000nnnndddd	1	—
MOV.W	R0,@(disp,Rn)	R0 → (dispx2+Rn)	10000001nnnndddd	1	—
MOV.L	Rm,@(disp,Rn)	Rm → (dispx4+Rn)	0001nnnnmmmmdddd	1	—
MOV.B	@(disp,Rm),R0	(disp+Rm) → sign extension R0	10000100mmmmdddd	1	—
MOV.W	@(disp,Rm),R0	(dispx2+Rm) → sign extension R0	10000101mmmmdddd	1	—
MOV.L	@(disp,Rm),Rn	(dispx4+Rm) → Rn	0101nnnnmmmmdddd	1	—

## Description

This instruction transfers the source operand to the destination. It is ideal for accessing data inside a structure or stack. Byte, word, or longword can be specified as the data size, but with byte or word data the register is always R0.

If the data is byte-size, the 4-bit displacement is only zero-extended, so a range up to +15 bytes can be specified. If the data is word-size, the 4-bit displacement is multiplied by two after zero-extension, enabling a range up to +30 bytes to be specified. With longword data, the 4-bit displacement is multiplied by four after zero-extension, enabling a range up to +60 bytes to be specified. If a memory operand cannot be reached, the previously described @(R0,Rn) mode must be used.

When the source operand is memory, the loaded data is sign-extended to longword before being stored in the register.

## Notes

When loading byte or word data, the destination register is always R0. Therefore, if the following instruction attempts to reference R0, it is kept waiting until completion of the load instruction. This allows optimization by changing the order of instructions.



## Operation

```
MOVBS4(long d, long n /* MOV.B R0,@(disp,Rn) */
{
    long disp;
    disp=(0x0000000F & (long)d);
    Write_Byte(R[n]+disp,R[0]);
    PC+=2;
}

MOVWS4(long d, long n) /* MOV.W R0,@(disp,Rn) */
{
    long disp;

    disp=(0x0000000F & (long)d);
    Write_Word(R[n]+(disp<<1),R[0]);
    PC+=2;
}

MOVLS4(long m, long d, long n) /* MOV.L Rm,@(disp,Rn) */
{
    long disp;

    disp=(0x0000000F & (long)d);
    Write_Long(R[n]+(disp<<2),R[m]);
    PC+=2;
}

MOVBL4(long m, long d) /* MOV.B @(disp,Rm),R0 */
{
    long disp;

    disp=(0x0000000F & (long)d);
    R[0]=Read_Byte(R[m]+disp);
    if ((R[0]&0x80)==0) R[0]&=0x000000FF;
    else R[0]|=0xFFFFF00;
    PC+=2;
}

MOVWL4(long m, long d) /* MOV.W @(disp,Rm),R0 */
{
    long disp;

    disp=(0x0000000F & (long)d);
    R[0]=Read_Word(R[m]+(disp<<1));
    if ((R[0]&0x8000)==0) R[0]&=0x0000FFFF;
    else R[0]|=0xFFFF0000;
    PC+=2;
}
```

```
MOVL4(long m, long d, long n) /* MOV.L @(disp,Rm),Rn */
{
    long disp;

    disp=(0x0000000F & (long)d);
    R[n]=Read_Long(R[m]+(disp<<2));
    PC+=2;
}
```

### Example

MOV.L	@(2,R0),R1	;Before execution	@(R0+8) = H'12345670
		;After execution	R1 = @H'12345670
MOV.L	R0,@(H'F,R1)	;Before execution	R0 = H'FFFF7F80
		;After execution	@(R1+60) = H'FFFF7F80

10.59	MOVA	MOVE effective address	Data Transfer Instruction	
	Effective Address Transfer			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
MOVA @(disp,PC),R0	disp×4+PC+4 → R0	11000111ddddddd	1	—

### Description

This instruction stores the source operand effective address in general register R0. The 8-bit displacement is multiplied by four after zero-extension. The PC value is the address of this instruction, but a value with the lower 2 bits adjusted to B'00 is used in address calculation.

### Notes

If this instruction is executed in a delay slot, an illegal slot instruction exception will be generated.

### Operation

```
MOVA(int d) /* MOVA @(disp,PC),R0 */
{
    unsigned int disp;

    disp=(unsigned int)(0x000000FF & d);
    R[0]=(PC&0xFFFFF7FC)+4+(disp<<2);
    PC+=2;
}
```

## Example

```

Address.orgH'1006
1006    MOVA    STR,R0    ;STR address ← R0
1008    MOV.B   @R0,R1    ;R = "X" ← Position after adjustment of lower 2 bits of PC
100A    ADD     R4,R5     ;← Original PC position in MOVA instruction address calculation
        .align 4
100C    STR:.sdata "XYZP12"

```

10.60	MOVCA.L	MOVE with Cache block Allocation	Data Transfer Instruction	
	Cache Block Allocation			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
MOVCA.L R0,@Rn	R0 → (Rn)	0000nnnn11000011	1	—

## Description

This instruction stores the contents of general register R0 in the memory location indicated by effective address Rn. This instruction differs from other store instructions as follows.

If write-back is selected for the accessed memory, and a cache miss occurs, the cache block will be allocated but an R0 data write will be performed to that cache block without performing a block read. Other cache block contents are undefined.

## Operation

```

MOVCA.L(int n) /*MOVCA.L R0,@Rn */
{
    if ((is_write_back_memory(R[n]))
        && (look_up_in_operand_cache(R[n]) == MISS))
        allocate_operand_cache_block(R[n]);
    Write_Long(R[n], R[0]);
    PC+=2;
}

```

## Possible Exceptions:

- Data TLB miss exception
- Data TLB protection violation exception
- Initial page write exception
- Address error

10.61	MOVT	MOVE T bit	Data Transfer Instruction	
	T Bit Transfer			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
MOVT Rn	T → Rn	0000nnnn00101001	1	—

## Description

This instruction stores the T bit in general register Rn. When T = 1, Rn = 1; when T = 0, Rn = 0.

## Operation

```
MOVT(long n) /* MOVT Rn */
{
    R[n]=(0x00000001 & SR);
    PC+=2;
}
```

## Example

```
XOR        R2,R2        ;R2 = 0
CMP/PZ     R2           ;T = 1
MOVT       R0           ;R0 = 1
CLRT              ;T = 0
MOVT       R1           ;R1 = 0
```

10.62	MUL.L	MULTiPLY Long			Arithmetic Instruction
	Double-Precision Multiplication				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
MUL.L Rm,Rn	RnxRm → MACL	0000nnnnmmmm0111	2–5	—	

## Description

This instruction performs 32-bit multiplication of the contents of general registers Rn and Rm, and stores the lower 32 bits of the result in the MACL register. The contents of MACH are not changed.

## Operation

MULL(long m, long n) /\* MUL.L Rm,Rn \*/

```
{
    MACL=R[n]*R[m];
    PC+=2;
}
```

## Example

```
MUL.L      R0,R1      ;Before execution      R0 = H'FFFFFFFE, R1 = H'00005555
              ;After execution      MACL = H'FFFF5556
STS        MACL,R0    ;Get operation result
```

10.63	MULS.W	MULTiply as Signed Word	Arithmetic Instruction		
	Signed Multiplication				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MULS.W	Rm,Rn				
MULS	Rm,Rn	Signed, Rn → Rm → MACL	0010nnnnmmmm1111	2–5	—

## Description

This instruction performs 16-bit multiplication of the contents of general registers Rn and Rm, and stores the 32-bit result in the MACL register. The multiplication is performed as a signed arithmetic operation. The contents of MACH are not changed.

## Operation

```
MULS(long m, long n) /* MULS Rm,Rn */
{
    MACL=((long)(short)R[n]*((long)(short)R[m]));
    PC+=2;
}
```

## Example

```
MULS.W      R0,R 1      ;Before execution      R0 = H'FFFFFFFE, R1 = H'00005555
              ;After executionM      ACL = H'FFFF5556
STS        MACL,R0    ;Get operation result
```

10.64	MULU.W	MULTiply as Unsigned Word	Arithmetic Instruction		
	Unsigned Multiplication				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
MULU.W MULU	Rm,Rn Rm,Rn	Unsigned, Rn x Rm → MACL	0010nnnnmmmm1110	2–5	—

## Description

This instruction performs 16-bit multiplication of the contents of general registers  $R_n$  and  $R_m$ , and stores the 32-bit result in the MACL register. The multiplication is performed as an unsigned arithmetic operation. The contents of MACH are not changed.

## Operation

```
MULU(long m, long n) /* MULU Rm,Rn */
{
    MACL=((unsigned long)(unsigned short)R[n]*
    (unsigned long)(unsigned short)R[m];
    PC+=2;
}
```

## Example

```
MULU.W    R0,R1      ;Before execution    R0 = H'00000002, R1 = H'FFFFAAAA
           ;After execution    MACL = H'00015554
STS       MACL,R0     ;Get operation result
```

10.65	NEG	NEGate	Arithmetic Instruction	
	Sign Inversion			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
NEG Rm,Rn	0-Rm → Rn	0110nnnnmmmm1011	1	—

## Description

This instruction finds the two's complement of the contents of general register  $R_m$  and stores the result in  $R_n$ . That is, it subtracts  $R_m$  from 0 and stores the result in  $R_n$ .

## Operation

```

NEG(long m, long n) /* NEG Rm,Rn */
{
    R[n]=0-R[m];
    PC+=2;
}

```

## Example

```

NEG    R0,R1          ;Before execution    R0 = H'00000001
                          ;After execution   R1 = H'FFFFFFF

```

10.66	NEGC	NEGate with Carry	Arithmetic Instruction	
	Sign Inversion with Borrow			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
NEGC Rm,Rn	0 – Rm – T → Rn, borrow → T	0110nnnnmmmm1010	1	Borrow

## Description

This instruction subtracts the contents of general register and the T bit from 0 and stores the result in Rn. A borrow resulting from the operation is reflected in the T bit. The NEGC instruction is used for sign inversion of a value exceeding 32 bits.

## Operation

```

NEGC(long m, long n) /* NEGC Rm,Rn */
{
    unsigned long temp;

    temp=0-R[m];
    R[n]=temp-T;
    if (0<temp) T=1;
    else T=0;
    if (temp<R[n]) T=1;
    PC+=2;
}

```

## Example

```

CLRT                                ;Sign inversion of R0:R1 (64 bits)
NEGC    R1,R1          ;Before execution    R1 = H'00000001, T = 0
                          ;After execution   R1 = H'FFFFFFF, T = 1
NEGC    R0,R0          ;Before execution    R0 = H'00000000, T = 1
                          ;After execution   R0 = H'FFFFFFF, T = 1

```

10.67	NOP	No OPeration			System Control Instruction
	No Operation				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
NOP	No operation	0000000000001001	1	—	

### Description

This instruction simply increments the program counter (PC), advancing the processing flow to execution of the next instruction.

### Operation

```
NOP( ) /* NOP */
{
    PC+=2;
}
```

### Example

```
NOP ;Time equivalent to one execution state elapses.
```

10.68	NOT	NOT-logical complement	Logical Instruction	
	Bit Inversion			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
NOT Rm,Rn	~Rm → Rn	0110nnnnmmmm0111	1	—

### Description

This instruction finds the one's complement of the contents of general register Rm and stores the result in Rn. That is, it inverts the Rm bits and stores the result in Rn.

### Operation

```
NOT(long m, long n) /* NOT Rm,Rn */
{
    R[n]=~R[m];
    PC+=2;
}
```



## Example

```
NOT R0,R1           ;Before execution  R0 = H'AAAAAAAA
                   ;After execution   R1 = H'55555555
```

10.69	OCBI	Operand Cache Block Invalidate	Data Transfer Instruction	
	Cache Block Invalidation			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
OCBI @Rn	Operand cache block invalidation	0000nnnn10010011	1	—

## Description

This instruction accesses data using the contents indicated by effective address Rn. In the case of a hit in the cache, the corresponding cache block is invalidated (the V bit is cleared to 0). If there is unwritten information (U bit = 1), write-back is not performed even if write-back mode is selected. No operation is performed in the case of a cache miss or an access to a non-cache area.

## Operation

```
OCBI(int n) /* OCBI @Rn */
{
    invalidate_operand_cache_block(R[n]);
    PC+=2;
}
```

## Possible Exceptions:

- Data TLB miss exception
- Data TLB protection violation exception
- Initial page write exception
- Address error

Note that the above exceptions are generated even if OCBI does not operate.

10.70	OCBP	Operand Cache Block Purge	Data Transfer Instruction	
	Cache Block Purge			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
OCBP @Rn	Operand cache block purge	0000nnnn10100011	1	—

### Description

This instruction accesses data using the contents indicated by effective address Rn. If the cache is hit and there is unwritten information (U bit = 1), the corresponding cache block is written back to external memory and that block is invalidated (the V bit is cleared to 0). If there is no unwritten information (U bit = 0), the block is simply invalidated. No operation is performed in the case of a cache miss or an access to a non-cache area.

### Operation

```
OCBP(int n) /* OCBP @Rn */
{
    if(is_dirty_block(R[n])) write_back(R[n])
    invalidate_operand_cache_block(R[n]);
    PC+=2;
}
```

### Possible Exceptions:

- Data TLB miss exception
- Data TLB protection violation exception
- Address error

Note that the above exceptions are generated even if OCBP does not operate.

10.71	OCBWB	Operand Cache Block Write Back	Data Transfer Instruction	
	Cache Block Write-Back			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
OCBWB @Rn	Operand cache block write-back	0000nnnn11010011	1	—

### Description

This instruction accesses data using the contents indicated by effective address Rn. If the cache is hit and there is unwritten information (U bit = 1), the corresponding cache block is written back to external memory and that block is cleaned (the U bit is cleared to 0). In other cases (i.e. in the case of a cache miss or an access to a non-cache area, or if the block is already clean), no operation is performed.

### Operation

```
OCBWB(int n) /* OCBWB @Rn */
{
    if(is_dirty_block(R[n])) write_back(R[n]);
    PC+=2;
}
```

## Possible Exceptions:

- Data TLB miss exception
- Data TLB protection violation exception
- Address error

Note that the above exceptions are generated even if OCBWB does not operate.

10.72	OR	OR logical	Logical Instruction		
	Logical OR				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
OR	Rm,Rn	Rn   Rm → Rn	0010nnnnmmmm1011	1	—
OR	#imm,R0	R0   imm → R0	11001011iiiiiii	1	—
OR.B	#imm,@(R0,GBR)	(R0+GBR)   imm → (R0+GBR)	11001111iiiiiii	4	—

## Description

This instruction ORs the contents of general registers Rn and Rm and stores the result in Rn.

This instruction can be used to OR general register R0 contents with zero-extended 8-bit immediate data, or, in indexed GBR indirect addressing mode, to OR 8-bit memory with 8-bit immediate data.

## Operation

OR(long m, long n) /\* OR Rm,Rn \*/

```
{
    R[n] |= R[m];
    PC+=2;
}
```

ORI(long i) /\* OR #imm,R0 \*/

```
{
    R[0] |= (0x000000FF & (long)i);
    PC+=2;
}
```

ORM(long i) /\* OR.B #imm,@(R0,GBR) \*/

```
{
    long temp;
```

```
temp=(long)Read_Byte(GBR+R[0]);
temp|=(0x000000FF & (long)i);
Write_Byte(GBR+R[0],temp);
PC+=2;
}
```

Example

```
OR      R0,R1           ;Before execution    R0 = H'AAAA5555, R1 = H'55550000
                        ;After execution     R1 = H'FFFF5555
OR      #H'F0,R0        ;Before execution    R0 = H'00000008
                        ;After execution     R0 = H'000000F8
OR.B    #H'50,@(R0,GBR) ;Before execution    @(R0,GBR) = H'A5
                        ;After execution     @(R0,GBR) = H'F5
```

10.73	PREF	PREFetch data to cache			Data Transfer Instruction
	Prefetch to Data Cache				
Format	Summary of Operation	Instruction Code	Execution States	T Bit	
PREF @Rn	Prefetch cache block	0000nnnn10000011	1	—	

Description

This instruction reads a 32-byte data block starting at a 32-byte boundary into the operand cache. The lower 5 bits of the address specified by Rn are masked to zero.

This instruction does not generate address-related errors. In the event of an error, the PREF instruction is treated as an NOP (no operation) instruction.

Operation

```
PREF(int n) /* PREF */
{
    PC+=2;
}
```

## Example

```

MOV.LSOFT_PF,R1          ;R1 address is SOFT_PF
      PREF      @R1      ;Load SOFT_PF data into on-chip cache


SOFT_PF:      .align      32
      .data.1      H'12345678
      .data.1      H'9ABCDEF0
      .data.1      H'AAAA5555
      .data.1      H'5555AAAA
      .data.1      H'11111111
      .data.1      H'22222222
      .data.1      H'33333333
      .data.1      H'44444444

```

10.74	ROTCL	ROTate with Carry Left	Shift Instruction	
	One-Bit Left Rotation through T Bit			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ROTCL Rn	T ← Rn ← T	0100nnnn00100100	1	MSB

## Description

This instruction rotates the contents of general register Rn one bit to the left through the T bit, and stores the result in Rn. The bit rotated out of the operand is transferred to the T bit.

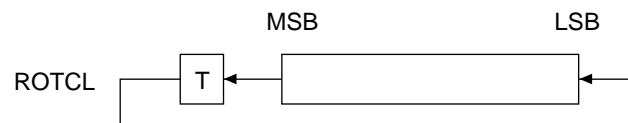

## Operation

```

ROTCL(long n) /* ROTCL Rn */
{
    long temp;

    if ((R[n]&0x80000000)==0) temp=0;
    else temp=1;
    R[n]<<=1;
    if (T==1) R[n]|=0x00000001;
    else R[n]&=0xFFFFF000;
    if (temp==1) T=1;
    else T=0;
    PC+=2;
}

```


Example

```
ROTCL R0 ;Before execution      R0 = H'80000000, T = 0
;After executionR0 = H'00000000, T = 1
```

10.75	ROTCR	ROtate with Carry Right	Shift Instruction	
	One-Bit Right Rotation through T Bit			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ROTCR Rn	T → Rn → T	0100nnnn00100101	1	LSB

Description

This instruction rotates the contents of general register Rn one bit to the right through the T bit, and stores the result in Rn. The bit rotated out of the operand is transferred to the T bit.



Operation

```
ROTCR(long n) /* ROTCR Rn */
{
    long temp;

    if ((R[n]&0x00000001)==0) temp=0;
    else temp=1;
    R[n]>>=1;
    if (T==1) R[n]|=0x80000000;
    else R[n]&=0x7FFFFFFF;
    if (temp==1) T=1;
    else T=0;
    PC+=2;
}
```

## Example

```


ROTCRR0    ;Before execution    R0 = H'00000001, T = 1
           ;After execution      R0 = H'80000000, T = 1

```

10.76	ROTL	ROTate Left	Shift Instruction	
	One-Bit Left Rotation			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ROTL Rn	$T \leftarrow R_n \leftarrow \text{MSB}$	0100nnnn00000100	1	MSB

## Description

This instruction rotates the contents of general register Rn one bit to the left, and stores the result in Rn. The bit rotated out of the operand is transferred to the T bit.



## Operation

```

ROTL(long n) /* ROTL Rn */
{
    if ((R[n]&0x80000000)==0) T=0;
    else T=1;
    R[n]<<=1;
    if (T==1) R[n]|=0x00000001;
    else R[n]&=0xFFFFFFFE;
    PC+=2;
}

```

## Example

```

ROTL      R0;Before executionR0 = H'80000000, T = 0
           ;After execution      R0 = H'00000001, T = 1

```

10.77	ROTR	ROTate Right	Shift Instruction	
	One-Bit Right Rotation			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
ROTR   Rn	LSB → Rn → T	0100nnnn00000101	1	LSB

Description

This instruction rotates the contents of general register Rn one bit to the right, and stores the result in Rn. The bit rotated out of the operand is transferred to the T bit.

Operation

```
ROTR(long n) /* ROTR Rn */
{
    if ((R[n]&0x00000001)==0) T=0;
    else T=1;
    R[n]>>=1;
    if (T==1) R[n]|=0x80000000;
    else R[n]&=0x7FFFFFFF;
    PC+=2;
}
```

Example

```
ROTR          R0      ;Before execution      R0 = H'00000001, T = 0
               ;After execution              R0 = H'80000000, T = 1
```

10.78	RTE	ReTurn from Exception	System Control Instruction	
	Return from Exception Handling		(Privileged Instruction) Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
RTE	SSR → SR, SPC→ PC	0000000000101011	5	—

Description

This instruction returns from an exception or interrupt handling routine by restoring the PC and SR values from SPC and SSR. Program execution continues from the address specified by the restored PC value.

RTE is a privileged instruction, and can only be used in privileged mode. Use of this instruction in user mode will cause an illegal instruction exception.



## Notes

As this is a delayed branch instruction, the instruction following the RTE instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. An exception must not be generated by the instruction in this instruction's delay slot. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

If this instruction is located in the delay slot immediately following a delayed branch instruction, it is identified as a slot illegal instruction.

The SR value accessed by the instruction in the RTE delay slot is the value restored from SSR by the RTE instruction. The SR and MD values defined prior to RTE execution are used to fetch the instruction in the RTE delay slot.

## Operation

```
RTE( ) /* RTE */
{
    unsigned int temp;
    temp=PC;
    SR=SSR;
    PC=SPC;
    Delay_Slot(temp+2);
}
```

## Example

```
RTE          ;Return to original routine.
ADD          #8,R14 ;Executed before branch.
```

**Note:** In a delayed branch, the actual branch operation occurs after execution of the slot instruction, but instruction execution (register updating, etc.) is in fact performed in delayed branch instruction → delay slot instruction order. For example, even if the register holding the branch destination address is modified in the delay slot, the branch destination address will still be the register contents prior to the modification.

10.79	RTS	ReTurn from Subroutine	Branch Instruction	
	Return from Subroutine Procedure		Delayed Branch Instruction	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
RTS	PR → PC	0000000000001011	2	—

## Description

This instruction returns from a subroutine procedure by restoring the PC from PR. Processing continues from the address indicated by the restored PC value. This instruction can be used to return from a subroutine procedure called by a BSR or JSR instruction to the source of the call.

### Notes

As this is a delayed branch instruction, the instruction following this instruction is executed before the branch destination instruction.

Interrupts are not accepted between this instruction and the following instruction. If the following instruction is a branch instruction, it is identified as a slot illegal instruction.

The instruction that restores PR must be executed before the RTS instruction. This restore instruction cannot be in the RTS delay slot.

### Operation

RTS() /\* RTS \*/

```
{
    unsigned int temp;

    temp=PC;
    PC=PR;
    Delay_Slot(temp+2);
}
```

### Example

```
MOV.LTABLE,R3      ;R3 = TRGET address
                    JSR      @R3      ; Branch to TRGET.
                    NOP              ;NOP executed before branch.
                    ADD       R0,R1    ;← Subroutine procedure return destination (PR contents)
                    .....
TABLE:              .data.l TRGET     ;Jump table
                    .....
TRGET:              MOV       R1,R0    ;← Entry to procedure
                    RTS                ;PR contents → PC
                    MOV       #12,R0   ;MOV executed before branch.
```

10.80	SETS	SET S bit	System Control Instruction	
	S Bit Setting			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SETS	1 → S	0000000001011000	1	1

### Description

This instruction sets the S bit to 1.

## Operation

```
SETS( ) /* SETS */
{
    S=1;
    PC+=2;
}
```

## Example

```
SETS          ;Before execution    S = 0
              ;After execution     S = 1
```

10.81	SETT	SET T bit	System Control Instruction	
	T Bit Setting			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SETT	1 → T	0000000000011000	1	1

## Description

This instruction sets the T bit to 1.

## Operation

```
SETT() /* SETT */
{
    T=1;
    PC+=2;
}
```

## Example

```
SETT;Before execution    T = 0
                        ;After execution    T = 1
```


10.82	SHAD	SHift Arithmetic Dynamically	Shift Instruction	
	Dynamic Arithmetic Shift			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SHAD Rm, Rn	When $Rm \geq 0$ , $Rn \ll Rm \rightarrow Rn$ When $Rm < 0$ , $Rn \gg Rm \rightarrow [MSB \rightarrow Rn]$	0100nnnnmmmm1100	1	—

### Description

This instruction arithmetically shifts the contents of general register Rn. General register Rm specifies the shift direction and the number of bits to be shifted.

Rn register contents are shifted to the left if the Rm register value is positive, and to the right if negative. In a shift to the right, the MSB is added at the upper end.

The number of bits to be shifted is specified by the lower 5 bits (bits 4 to 0) of the Rm register. If the value is negative (MSB = 1), the Rm register is represented as a two's complement. The left shift range is 0 to 31, and the right shift range, 1 to 32.

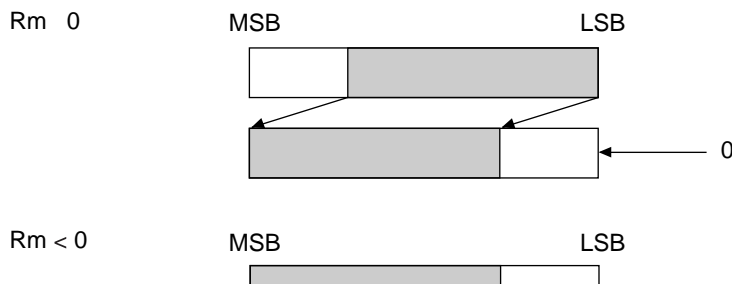

### Operation

```
SHAD(int m,n) /*SHAD Rm,Rn */
{
    int sgn=R[m] & 0x80000000;
    if (sgn==0)
        R[n] <<= (R[m] & 0x1F);
    else if ((R[m] & 0x1F) == 0) {
        if ((R[n] & 0x80000000) == 0)
            R[n] = 0;
        else
            R[n] = 0xFFFFFFFF;
    }
    else
        R[n]=(long)R[n] >> ((~R[m] & 0x1F)+1);
    PC+=2;
}
```


### Example

SHADR1,R2	;Before execution	R1 = H'FFFFFFEC, R2 = H'80180000
	;After execution	R1 = H'FFFFFFEC, R2 = H'FFFFFF801
SHAD R3,R4	;Before execution	R3 = H'00000014, R4 = H'FFFFFF801
	;After execution	R3 = H'00000014, R4 = H'80100000

10.83	SHAL	SHift Arithmetic Left	Shift Instruction	
	One-Bit Left Arithmetic Shift			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SHAL Rn	T ← Rn ← 0	0100nnnn00100000	1	MSB

## Description

This instruction arithmetically shifts the contents of general register Rn one bit to the left, and stores the result in Rn. The bit shifted out of the operand is transferred to the T bit.



## Operation

SHAL(long n) /\* SHAL Rn (Same as SHLL) \*/

```
{
    if ((R[n]&0x80000000)==0) T=0;
    else T=1;
    R[n]<<=1;
    PC+=2;
}
```

## Example

```
SHAL R0          ;Before executionR0 = H'80000001, T = 0
                  ;After executionR0 = H'00000002, T = 1
```

10.84	SHAR	SHift Arithmetic Right	Shift Instruction	
	One-Bit Right Arithmetic Shift			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SHAR   Rn	MSB → Rn → T	0100nnnn00100001	1	LSB

Description

This instruction arithmetically shifts the contents of general register Rn one bit to the right, and stores the result in Rn. The bit shifted out of the operand is transferred to the T bit.



Operation

```
SHAR(long n) /* SHAR Rn */
{
    long temp;

    if ((R[n]&0x00000001)==0) T=0;
    else T=1;
    if ((R[n]&0x80000000)==0) temp=0;
    else temp=1;
    R[n]>>=1;
    if (temp==1) R[n]|=0x80000000;
    else R[n]&=0x7FFFFFFF;
    PC+=2;
}
```

Example

```
SHAR R0;Before execution      R0 = H'80000001, T = 0
\                             ;After execution      R0 = H'C0000000, T = 1
```


10.85	SHLD	Shift Logical Dynamically	Shift Instruction	
	Dynamic Logical Shift			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SHLD Rm, Rn	When Rm ≥ 0, Rn << Rm → Rn When Rm < 0, Rn >> Rm → [0 → Rn]	0100nnnnmmmm1101	1	—

Description

This instruction logically shifts the contents of general register Rn. General register Rm specifies the shift direction and the number of bits to be shifted.

Rn register contents are shifted to the left if the Rm register value is positive, and to the right if negative. In a shift to the right, 0s are added at the upper end.

The number of bits to be shifted is specified by the lower 5 bits (bits 4 to 0) of the Rm register. If the value is negative (MSB = 1), the Rm register is represented as a two's complement. The left shift range is 0 to 31, and the right shift range, 1 to 32.

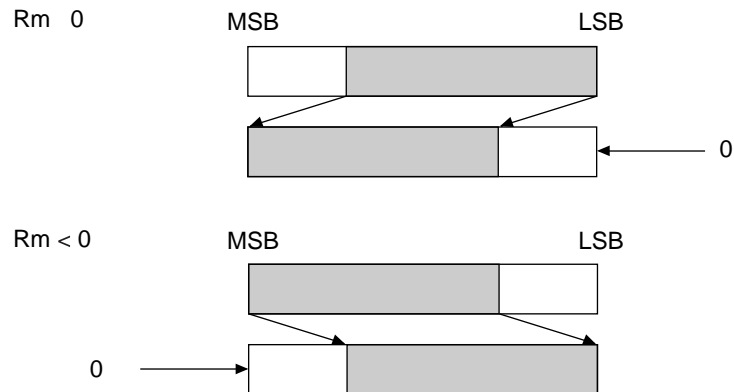

## Operation

```
SHLD(int m,n)/*SHLD Rm,Rn */
{
    int sgn = R[m] & 0x80000000;
    if (sgn == 0)
        R[n] <= (R[m] & 0x1F);
    else if ((R[m] & 0x1F) == 0)
        R[n] = 0;
    else
        R[n]=(unsigned)R[n] >> ((~R[m] & 0x1F)+1);
    PC+=2;
}
```

## Example

```
SHLD R1, R2;Before execution      R1 = H'FFFFFFEC,  R2 = H'80180000
                                ;After execution      R1 = H'FFFFFFEC,  R2 = H'00000801
SHLD R3, R4                      ;Before execution      R3 = H'00000014,  R4 = H'FFFFFF801
                                ;After execution      R3 = H'00000014,  R4 = H'80100000
```

10.86	SHLL	SHift Logical Left	Shift Instruction	
	One-Bit Left Logical Shift			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SHLL Rn	$T \leftarrow Rn \leftarrow 0$	0100nnnn00000000	1	MSB

Description

This instruction logically shifts the contents of general register Rn one bit to the left, and stores the result in Rn. The bit shifted out of the operand is transferred to the T bit.



Operation

SHLL(long n) /\* SHLL Rn (Same as SHAL) \*/

```
{
  if ((R[n]&0x80000000)==0) T=0;
  else T=1;
  R[n]<<=1;
  PC+=2;
}
```

Example


```
SHLL R0;Before execution      R0 = H'80000001, T = 0
                          ;After execution      R0 = H'00000002, T = 1
```

10.87	SHLLn	n bits SHift Logical Left		Shift Instruction	
	n-Bit Left Logical Shift				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
SHLL2	Rn	Rn<<2 → Rn	0100nnnn00001000	1	—
SHLL8	Rn	Rn<<8 → Rn	0100nnnn00011000	1	—
SHLL16	Rn	Rn<<16 → Rn	0100nnnn00101000	1	—



## Description

This instruction logically shifts the contents of general register Rn 2, 8, or 16 bits to the left, and stores the result in Rn. The bits shifted out of the operand are discarded.

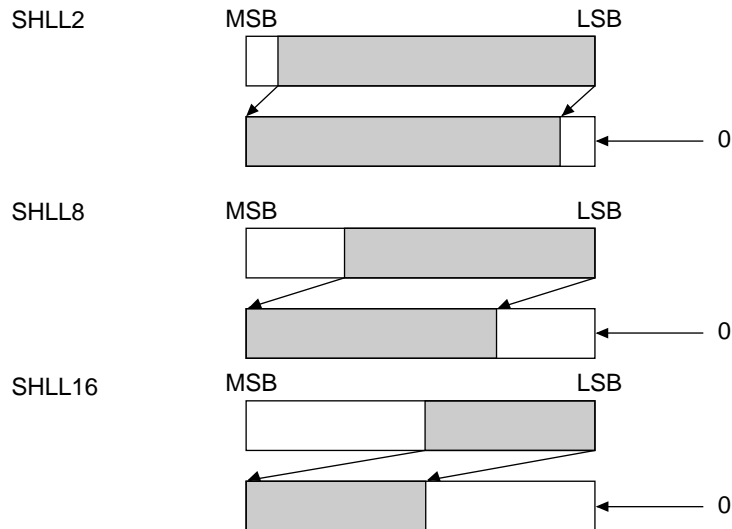

## Operation

SHLL2(long n) /\* SHLL2 Rn \*/

```
{
    R[n]<<=2;
    PC+=2;
}
```

SHLL8(long n) /\* SHLL8 Rn \*/

```
{
    R[n]<<=8;
    PC+=2;
}
```

SHLL16(long n) /\* SHLL16 Rn \*/

```
{
    R[n]<<=16;
    PC+=2;
}
```

Example

```
SHLL2 R0           ;Before executionR0 = H'12345678
                   ;After execution    R0 = H'48D159E0
SHLL8 R0           ;Before execution    R0 = H'12345678
                   ;After execution    R0 = H'34567800
SHLL16 R0          ;Before execution    R0 = H'12345678
                   ;After execution    R0 = H'56780000
```

10.88	SHLR		SHift Logical Right	Shift Instruction	
	One-Bit Right Logical Shift				
Format	Summary of Operation		Instruction Code	Execution States	T Bit
SHLR    Rn	0 → Rn → T		0100nnnn00000001	1	LSB

Description

This instruction logically shifts the contents of general register Rn one bit to the right, and stores the result in Rn. The bit shifted out of the operand is transferred to the T bit.



Operation

```
SHLR(long n) /* SHLR Rn */
{
    if ((R[n]&0x00000001)==0) T=0;
    else T=1;
    R[n]>>=1;
    R[n]&=0x7FFFFFFF;
    PC+=2;
}
```


## Example

```
SHLRR0    ;Before execution      R0 = H'80000001, T = 0
          ;After execution       R0 = H'40000000, T = 1
```

10.89	SHLRn	n bits SHift Logical Right	Shift Instruction		
	n-Bit Right Logical Shift				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
SHLR2	Rn	$Rn \gg 2 \rightarrow Rn$	0100nnnn00001001	1	—
SHLR8	Rn	$Rn \gg 8 \rightarrow Rn$	0100nnnn00011001	1	—
SHLR16	Rn	$Rn \gg 16 \rightarrow Rn$	0100nnnn00101001	1	—

## Description

This instruction logically shifts the contents of general register Rn 2, 8, or 16 bits to the right, and stores the result in Rn. The bits shifted out of the operand are discarded.

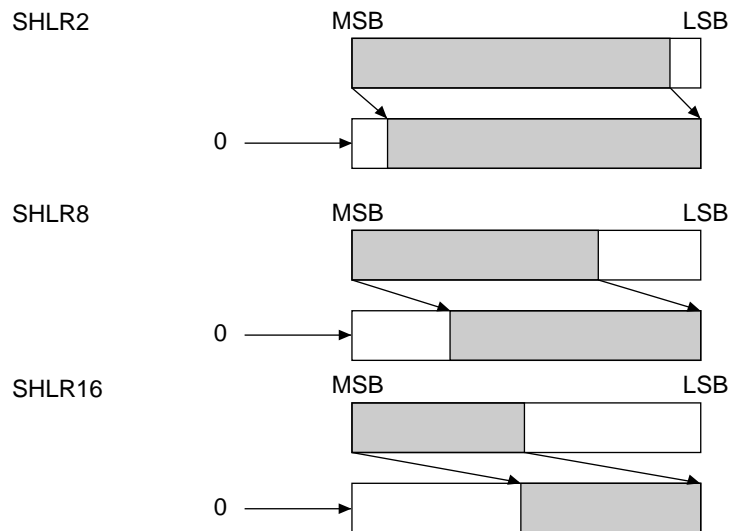

Operation

```
SHLR2(long n) /* SHLR2 Rn */
{
    R[n]>>=2;
    R[n]&=0x3FFFFFFF;
    PC+=2;
}

SHLR8(long n) /* SHLR8 Rn */
{
    R[n]>>=8;
    R[n]&=0x00FFFFFF;
    PC+=2;
}

SHLR16(long n) /* SHLR16 Rn */
{
    R[n]>>=16;
    R[n]&=0x0000FFFF;
    PC+=2;
}
```

Example

```
SHLR2 R0          ;Before executionR0 = H'12345678
                  ;After execution    R0 = H'048D159E
SHLR8             R0      ;Before execution    R0 = H'12345678
                  ;After execution    R0 = H'00123456
SHLR16            R0      ;Before execution    R0 = H'12345678
                  ;After execution    R0 = H'00001234
```

10.90	SLEEP	SLEEP	System Control Instruction	
	Transition to Power-Down Mode		(Privileged Instruction)	
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SLEEP	Sleep	0000000000011011	4	—

Description

This instruction places the CPU in the power-down state.

In power-down mode, the CPU retains its internal state, but immediately stops executing instructions and waits for an interrupt request. When it receives an interrupt request, the CPU exits the power-down state.

SLEEP is a privileged instruction, and can only be used in privileged mode. Use of this instruction in user mode will cause an illegal instruction exception.

## Notes

SLEEP performance depends on the standby control register (STBCR). See section 9, Power-Down Modes, for details.

## Operation

```
SLEEP( ) /* SLEEP */
{
    Sleep_standby();
}
```

## Example

```
SLEEP ;Transition to power-down mode
```

10.91	STC	STore Control register	System Control Instruction		
	Store from Control Register			(Privileged Instruction)	
Format		Summary of Operation	Instruction Code	Execution States	T Bit
STC	SR, Rn	SR → Rn	0000nnnn00000010	2	—
STC	GBR, Rn	GBR → Rn	0000nnnn00010010	2	—
STC	VBR, Rn	VBR → Rn	0000nnnn00100010	2	—
STC	SSR, Rn	SSR → Rn	0000nnnn00110010	2	—
STC	SPC, Rn	SPC → Rn	0000nnnn01000010	2	—
STC	SGR, Rn	SGR → Rn	0000nnnn00111010	3	—
STC	DBR, Rn	DBR → Rn	0000nnnn11111010	2	—
STC	R0_BANK, Rn	R0_BANK → Rn	0000nnnn10000010	2	—
STC	R1_BANK, Rn	R1_BANK → Rn	0000nnnn10010010	2	—
STC	R2_BANK, Rn	R2_BANK → Rn	0000nnnn10100010	2	—
STC	R3_BANK, Rn	R3_BANK → Rn	0000nnnn10110010	2	—
STC	R4_BANK, Rn	R4_BANK → Rn	0000nnnn11000010	2	—
STC	R5_BANK, Rn	R5_BANK → Rn	0000nnnn11010010	2	—
STC	R6_BANK, Rn	R6_BANK → Rn	0000nnnn11100010	2	—
STC	R7_BANK, Rn	R7_BANK → Rn	0000nnnn11110010	2	—
STC.L	SR, @-Rn	Rn-4 → Rn, SR → (Rn)	0100nnnn00000011	2	—

10.91	STC	STore Control register	System Control Instruction		
STC.L	GBR, @-Rn	Rn-4 → Rn, GBR → (Rn)	0100nnnn00010011	2	—
STC.L	VBR, @-Rn	Rn-4 → Rn, VBR → (Rn)	0100nnnn00100011	2	—
STC.L	SSR, @-Rn	Rn-4 → Rn, SSR → (Rn)	0100nnnn00110011	2	—
STC.L	SPC, @-Rn	Rn-4 → Rn, SPC → (Rn)	0100nnnn01000011	2	—
STC.L	SGR, @-Rn	Rn-4 → Rn, SGR → (Rn)	0100nnnn00110010	3	—
STC.L	DBR, @-Rn	Rn-4 → Rn, DBR → (Rn)	0100nnnn11110010	2	—
STC.L	R0_BANK, @-Rn	Rn-4 → Rn, R0_BANK → (Rn)	0100nnnn10000011	2	—
STC.L	R1_BANK, @-Rn	Rn-4 → Rn, R1_BANK → (Rn)	0100nnnn10010011	2	—
STC.L R2_BANK, @-Rn	Rn-4 → Rn, R2_BANK → (Rn)	0100nnnn10100011	2	—	
STC.L R3_BANK, @-Rn	Rn-4 → Rn, R3_BANK → (Rn)	0100nnnn10110011	2	—	
STC.L R4_BANK, @-Rn	Rn-4 → Rn, R4_BANK → (Rn)	0100nnnn11000011	2	—	
STC.L R5_BANK, @-Rn	Rn-4 → Rn, R5_BANK → (Rn)	0100nnnn11010011	2	—	
STC.L R6_BANK, @-Rn	Rn-4 → Rn, R6_BANK → (Rn)	0100nnnn11100011	2	—	
STC.L R7_BANK, @-Rn	Rn-4 → Rn, R7_BANK → (Rn)	0100nnnn11110011	2	—	

## Description

This instruction stores control register SR, GBR, VBR, SSR, SPC, S6R, DBR or Rm\_BANK (m = 0–7) in the destination.

Rm\_BANK operands are specified by the RB bit of the SR register:

when the RB bit is 1 Rm\_BANK0 is accessed,

when the RB bit is 0 Rm\_BANK1 is accessed.

## Notes

STC/STC.L can only be used in privileged mode excepting STC GBR, Rn, STC.L GBR, @-Rn. Use of these instructions in user mode will cause illegal instruction exceptions.

## Operation

```
STCSR(int n) /* STC SR,Rn : Privileged */
{
    R[n]=SR;
    PC+=2;
}

STCGBR(int n) /* STC GBR,Rn */
{
    R[n]=SGR;
    PC+=2;
}

STCVBR(int n) /* STC VBR,Rn : Privileged */
{
    R[n]=VBR;
    PC+=2;
}

STCSSR(int n) /* STC SSR,Rn : Privileged */
{
    R[n]=SSR;
    PC+=2;
}

STCSPC(int n) /* STC SPC,Rn : Privileged */
{
    R[n]=SPC;
    PC+=2;
}

STCSGR(int n) /* STC SGR,Rn : Privileged */
{
    R[n]=SGR;
    PC+=2;
}

STCDBR(int n) /* STC DBR,Rn : Privileged */
{
    R[n]=DBR;
    PC+=2;
}

STCRm_BANK(int n) /* STC Rm_BANK,Rn : Privileged */
/* m=0-7 */
{
    R[n]=Rm_BANK;
    PC+=2;
}
```

```
    }

STCMSR(int n) /* STC.L SR,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],SR);
    PC+=2;
}

STCMGBR(int n) /* STC.L GBR,@-Rn */
{
    R[n]--=4;
    Write_Long(R[n],GBR);
    PC+=2;
}

STCMVBR(int n) /* STC.L VBR,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],VBR);
    PC+=2;
}

STCMSSR(int n) /* STC.L SSR,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],SSR);
    PC+=2;
}

STCMSPC(int n) /* STC.L SPC,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],SPC);
    PC+=2;
}

STCMSGR(int n) /* STC.L SGR,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],SGR);
    PC+=2;
}

STCMDBR(int n) /* STC.L DBR,@-Rn : Privileged */
{
    R[n]--=4;
    Write_Long(R[n],DBR);
    PC+=2;
}
```



```

STCMRm_BANK(int n) /* STC.L Rm_BANK,@-Rn : Privileged */
/* m=0-7 */
{
    R[n]--=4;
    Write_Long(R[n],Rm_BANK);
    PC+=2;
}

```

## Possible Exceptions:

- General illegal instruction exception
- Slot illegal instruction exception
- Data TLB miss exception
- Data TLB protection violation exception
- Address error

10.92.1	STS	STore System register		System Control Instruction	
	Store from System Register				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
STS	MACH,Rn	MACH → Rn	0000nnnn00001010	1	—
STS	MACL,Rn	MACL → Rn	0000nnnn00011010	1	—
STS	PR,Rn	PR → Rn	0000nnnn00101010	1	—
STS.L	MACH,@-Rn	Rn-4 → Rn, MACH → (Rn)	0100nnnn00000010	1	—
STS.L	MACL,@-Rn	Rn-4 → Rn, MACL → (Rn)	0100nnnn00010010	1	—
STS.L	PR,@-Rn	Rn-4 → Rn, PR → (Rn)	0100nnnn00100010	1	—

## Description

This instruction stores system register MACH, MACL, or PR in the destination.

### **Operation**

```
STSMACH(int n) /* STS MACH,Rn */
{
    R[n]=MACH;
    PC+=2;
}

STSMACL(int n) /* STS MACL,Rn */
{
    R[n]=MACL;
    PC+=2;
}

STSPR(int n) /* STS PR,Rn */
{
    R[n]=PR;
    PC+=2;
}

STSMMACH(int n) /* STS.L MACH,@-Rn */
{
    R[n]-=4;
    Write_Long(R[n],MACH);
    PC+=2;
}

STSMACL(int n) /* STS.L MACL,@-Rn */
{
    R[n]-=4;
    Write_Long(R[n],MACL);
    PC+=2;
}

STSMPR(int n) /* STS.L PR,@-Rn */
{
    R[n]-=4;
    Write_Long(R[n],PR);
    PC+=2;
}
```

### **Possible Exceptions:**

- Data TLB miss exception
- Data TLB protection violation exception
- Address error

## Example

```

STS MACH,R0      ; Before execution R0 = H'FFFFFFFF, MACH = H'00000000
                  ; After execution   R0 = H'00000000
STS.L PR,@-R15   ; Before execution  R15 = H'10000004
                  ; After execution   R15 = H'10000000, (R15) = PR

```

10.92.2	STS	STore from FPU System register		System Control Instruction	
	Store from FPU System Register				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
STS	FPUL,Rn	FPUL → Rn	0000nnnn01011010	1	—
STS	FPSCR,Rn	FPSCR → Rn	0000nnnn01101010	1	—
STS.L	FPUL,@-Rn	Rn-4 → Rn, FPUL → (Rn)	0100nnnn01010010	1	—
STS.L	FPSCR,@-Rn	Rn-4 → Rn, FPSCR → (Rn)	0100nnnn01100010	1	—

## Description

This instruction stores FPU system register FPUL or FPSCR in the destination.

## Operation

```

STS(int n, int FPUL) /* STS FPUL,Rn */
{
    R[n]= *FPUL;
    PC+=2;
}
STS_SAVE(int n, int FPUL) /* STS.L FPUL,@-Rn */
{
    R[n]--4;
    Write_Long(R[n],*FPUL) ;
    PC+=2;
}
STS(int n) /* STS FPSCR,Rn */
{
    R[n]=FPSCR&0x003FFFFFF;
    PC+=2;
}
STS_RESTORE(int n) /* STS.L FPSCR,@-Rn */
{
    R[n]--4;
    Write_Long(R[n],FPSCR&0x003FFFFFF)
    PC+=2;
}

```

### Possible Exceptions:

- Data TLB miss exception
- Data TLB protection violation exception
- Address error

### Examples

- STS

Example 1:

```
MOV.L      #H'12ABCDEF, R12
LDS        R12, FPUL
STS        FPUL, R13
           ; After executing the STS instruction:
           ; R13 = 12ABCDEF
```

Example 2:

```
STS        FPSCR, R2
           ; After executing the STS instruction:
           ; The current content of FPSCR is stored in register R2

STS.L      ;
```

Example 1:

```
MOV.L      #H'0C700148, R7
STS.L      FPUL, @-R7
           ; Before executing the STS.L instruction:
           ; R7 = 0C700148
           ; After executing the STS.L instruction:
           ; R7 = 0C700144, and the content of FPUL is saved at memory
           ; location 0C700144.
```

Example 2:

```
MOV.L      #H'0C700154, R8
STS.L      FPSCR, @-R8
           ; After executing the STS.L instruction:
           ; The content of FPSCR is saved at memory location 0C700150
```

10.93	SUB	SUBtract binary	Arithmetic Instruction	
	Binary Subtraction			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SUB Rm,Rn	Rn-Rm → Rn	0011nnnnmmmm1000	1	—

## Description

This instruction subtracts the contents of general register Rm from the contents of general register Rn and stores the result in Rn. For immediate data subtraction, ADD #imm,Rn should be used.

## Operation

```
SUB(long m, long n) /* SUB Rm,Rn */
{
    R[n] -= R[m];
    PC += 2;
}
```

## Example

```
SUB      R0,R1 ;Before execution R0 = H'00000001, R1 = H'80000000
           ;After execution      R1 = H'7FFFFFFF
```

10.94	SUBC	SUBtract with Carry	Arithmetic Instruction	
	Binary Subtraction with Borrow			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SUBC Rm,Rn	Rn-Rm-T → Rn, borrow → T	0011nnnnmmmm1010	1	Borrow

## Description

This instruction subtracts the contents of general register Rm and the T bit from the contents of general register Rn, and stores the result in Rn. A borrow resulting from the operation is reflected in the T bit. This instruction is used for subtractions exceeding 32 bits.

## Operation

```
SUBC(long m, long n) /* SUBC Rm,Rn */
{
    unsigned long tmp0,tmp1;

    tmp1=R[n]-R[m];
    tmp0=R[n];
    R[n]=tmp1-T;
    if (tmp0<tmp1) T=1;
    else T=0;
    if (tmp1<R[n]) T=1;
    PC+=2;
}
```

Example

```
CLRT      ;R0:R1(64 bits) - R2:R3(64 bits) = R0:R1(64 bits)
SUBC      R3,R1      ;Before execution  T = 0, R1 = H'00000000, R3 = H'00000001
                        ;After execution  T = 1, R1 = H'FFFFFFFF
SUBC      R2,R0      ;Before execution  T = 1, R0 = H'00000000, R2 = H'00000000
                        ;After execution  T = 1, R0 = H'FFFFFFFF
```

10.95	SUBV SUBtract with (V flag) underflow check Arithmetic Instruction			
	Binary Subtraction with Underflow Check			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
SUBV Rm,Rn	Rn-Rm → Rn, underflow → T	0011nnnnmmmm1011	1	Underflow

Description

This instruction subtracts the contents of general register Rm from the contents of general register Rn, and stores the result in Rn. If underflow occurs, the T bit is set.

Operation

```
SUBV(long m, long n) /* SUBV Rm,Rn */
{
    long dest,src,ans;

    if ((long)R[n]>=0) dest=0;
    else dest=1;
    if ((long)R[m]>=0) src=0;
    else src=1;
    src+=dest;
    R[n]-=R[m];
    if ((long)R[n]>=0) ans=0;
    else ans=1;
    ans+=dest;
    if (src==1) {
        if (ans==1) T=1;
        else T=0;
    }
    else T=0;
    PC+=2;
}
```

## Example

```

SUBVR0,R1          ;Before execution  R0 = H'00000002, R1 = H'80000001
                   ;After execution   R1 = H'7FFFFFFF, T = 1
SUBV                R2,R3          ;Before execution  R2 = H'FFFFFFFE, R3 = H'7FFFFFFE
                   ;After execution   R3 = H'80000000, T = 1

```

10.96	SWAP	SWAP register halves	Data Transfer Instruction		
		Upper-/Lower-Half Swap			
Format		Summary of Operation	Instruction Code	Execution States	T Bit
SWAP.B	Rm,Rn	Rm → lower-2-byte upper-/lower-byte swap → Rn	0110nnnnmmmm1000	1	—
SWAP.W	Rm,Rn	Rm → upper-/lower-word swap → Rn	0110nnnnmmmm1001	1	

## Description

This instruction swaps the upper and lower parts of the contents of general register Rm, and stores the result in Rn.

In the case of a byte specification, the 8 bits from bit 15 to bit 8 of Rm are swapped with the 8 bits from bit 7 to bit 0. The upper 16 bits of Rm are transferred directly to the upper 16 bits of Rn.

In the case of a word specification, the 16 bits from bit 31 to bit 16 of Rm are swapped with the 16 bits from bit 15 to bit 0.

## Operation

```

SWAPB(long m, long n) /* SWAP.B Rm,Rn */
{
    unsigned long temp0,temp1;

    temp0=R[m]&0xFFFF0000;
    temp1=(R[m]&0x000000FF)<<8;
    R[n]=(R[m]&0x0000FF00)>>8;
    R[n]=R[n]|temp1|temp0;
    PC+=2;
}

SWAPW(long m, long n) /* SWAP.W Rm,Rn */
{
    unsigned long temp;

    temp=(R[m]>>16)&0x0000FFFF;
    R[n]=R[m]<<16;
    R[n]|=temp;
    PC+=2;
}

```

## Example

```
SWAP.BR0,R1;Before executionR0 = H'12345678
                ;After execution    R1 = H'12347856
SWAP.W      R0,R1 ;Before execution R0 = H'12345678
                ;After execution    R1 = H'56781234
```

10.97	TAS	Test And Set	Logical Instruction	
	Memory Test and Bit Setting			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
TAS.B @Rn	If (Rn) = 0, 1 → T, else 0 → T 1 → MSB of (Rn)	0100nnnn00011011	5	Test result

## Description

This instruction purges the cache block corresponding to the memory area specified by the contents of general register Rn, reads the byte data indicated by that address, and sets the T bit to 1 if that data is zero, or clears the T bit to 0 if the data is nonzero. The instruction then sets bit 7 to 1 and writes to the same address. The bus is not released during this period.

The purge operation is executed as follows.

In a purge operation, data is accessed using the contents of general register Rn as the effective address. If there is a cache hit and the corresponding cache block is dirty (U bit = 1), the contents of that cache block are written back to external memory, and the cache block is then invalidated (by clearing the V bit to 0). If there is a cache hit and the corresponding cache block is clean (U bit = 0), the cache block is simply invalidated (by clearing the V bit to 0). A purge is not executed in the event of a cache miss, or if the accessed memory location is non-cacheable.

The two TAS.B memory accesses are executed automatically. Another memory access is not executed between the two TAS.B accesses.

## Operation

```
TAS(int n) /* TAS.B @Rn */
{
    int temp;

    temp=(int)Read_Byte(R[n]); /* Bus Lock */
    if (temp==0) T=1;
    else T=0;
    temp|=0x00000080;
    Write_Byte(R[n],temp); /* Bus unlock */
    PC+=2;
}
```



## Possible Exceptions:

- Data TLB miss exception
- Data protection violation exception
- Initial page write exception
- Address error

Exceptions are checked taking a data access by this instruction as a byte store.

10.98	TRAPA	TRAP Always	System Control Instruction	
	Trap Exception Handling			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
TRAPA #imm	imm → TRA, PC+2 → SPC, SR → SSR, 1 → SR.MD/ BL/RB, 0x160 → EXPEVT, VBR+H'00000100 → PC	11000011iiiiiii	7	—

## Description

This instruction starts trap exception handling. The values of (PC + 2) and SR are saved to SPC and SSR, and 8-bit immediate data is stored in the TRA register (bits 9 to 2). The processor mode is switched to privileged mode (the MD bit in SR is set to 1), and the BL bit and RB bit in SR are set to 1. As a result, exception and interrupt requests are masked (not accepted), and the BANK1 registers (R0\_BANK1 to R7\_BANK1) are selected. Exception code 0x160 is written to the EXPEVT register (bits 11 to 0). The program branches to address (VBR + H'00000100), indicated by the sum of the VBR register contents and offset H'00000100.

## Operation

```

TRAPA(int i) /* TRAPA #imm */
{
    int imm;

    imm=(0x000000FF & i);
    TRA=imm<<2;
    SSR=SR;
    SPC=PC+2;
    SR.MD=1;
    SR.BL=1;
    SR.RB=1;
    EXPEVT=0x00000160;
    PC=VBR+H'00000100;
}

```

10.99	TST	TeST logical	Logical Instruction		
	AND Operation T Bit Setting				
Format		Summary of Operation	Instruction Code	Execution States	T Bit
TST	Rm,Rn	Rn & Rm; if result is 0, 1 → T, else 0 → T	0010nnnnmmmm1000	1	Test result
TST	#imm,R0	R0 & imm; if result is 0, 1 → T, else 0 → T	11001000iiiiiii	1	Test result
TST.B	#imm,@(R0,GBR)	(R0 + GBR) & imm; if result is 0, 1 → T, else 0 → T	11001100iiiiiii	3	Test result

## Description

This instruction ANDs the contents of general registers Rn and Rm, and sets the T bit if the result is zero. If the result is nonzero, the T bit is cleared. The contents of Rn are not changed.

This instruction can be used to AND general register R0 contents with zero-extended 8-bit immediate data, or, in indexed GBR indirect addressing mode, to AND 8-bit memory with 8-bit immediate data. The contents of R0 or the memory are not changed.

## Operation

```
TST(long m, long n) /* TST Rm,Rn */
{
    if ((R[n]&R[m])==0) T=1;
    else T=0;
    PC+=2;
}

TSTI(long i)          /* TST #imm,R0 */
{
    long temp;

    temp=R[0]&(0x000000FF & (long)i);
    if (temp==0) T=1;
    else T=0;
    PC+=2;
}

TSTM(long i) /* TST.B #imm,@(R0,GBR) */
{
    long temp;

    temp=(long)Read_Byte(GBR+R[0]);
    temp&=(0x000000FF & (long)i);
    if (temp==0) T=1;
    else T=0;
    PC+=2;
}
```

## Example

```

TSTR0,R0 ;Before execution  R0 = H'00000000
                                ;After execution      T = 1
TST      #H'80,R0            ;Before execution      R0 = H'FFFFFF7F
                                ;After execution      T = 1
TST.B    #H'A5,@(R0,GBR)    ;Before execution      @(R0,GBR) = H'A5
                                ;After execution      T = 0

```

10.100	XOR	eXclusive OR logical				Logical Instruction
	Exclusive Logical OR					
Format		Summary of Operation	Instruction Code	Execution States	T Bit	
XOR	Rm,Rn	$R_n \wedge R_m \rightarrow R_n$	0010nnnnmmmm1010	1	—	
XOR	#imm,R0	$R_0 \wedge \text{imm} \rightarrow R_0$	11001010iiiiiii	1	—	
XOR.B	#imm,@(R0,GBR)	$(R_0 + \text{GBR}) \wedge \text{imm} \rightarrow (R_0 + \text{GBR})$	11001110iiiiiii	4	—	

## Description

This instruction exclusively ORs the contents of general registers Rn and Rm, and stores the result in Rn.

This instruction can be used to exclusively OR register R0 contents with zero-extended 8-bit immediate data, or, in indexed GBR indirect addressing mode, to exclusively OR 8-bit memory with 8-bit immediate data.

## Operation

```

XOR(long m, long n) /* XOR Rm,Rn */
{
    R[n]^=R[m];
    PC+=2;
}

XORI(long i) /* XOR #imm,R0 */
{
    R[0]^=(0x000000FF & (long)i);
    PC+=2;
}

XORM(long i) /* XOR.B #imm,@(R0,GBR) */
{
    int temp;

    temp=(long)Read_Byte(GBR+R[0]);
    temp^=(0x000000FF & (long)i);
    Write_Byte(GBR+R[0],temp);
    PC+=2;
}

```


Example

```
XOR          R0,R1;Before executionR0 = H'AAAAAAA, R1 = H'55555555
              ;After execution R1 = H'FFFFFFF
XOR #H'F0,R0  ;Before executionR0 = H'FFFFFFF
              ;After execution R0 = H'FFFFFF0F
XOR.B        #H'A5,@(R0,GBR);Before execution@(R0,GBR) = H'A5
              ;After execution @(R0,GBR) = H'00
```

10.101	XTRCT	eXRact	Data Transfer Instruction	
	Middle Extraction from Linked Registers			
Format	Summary of Operation	Instruction Code	Execution States	T Bit
XTRCT Rm,Rn	Middle 32 bits of Rm:Rn → Rn	0010nnnnmmmm1101	1	—

Description

This instruction extracts the middle 32 bits from the 64-bit contents of linked general registers Rm and Rn, and stores the result in Rn.

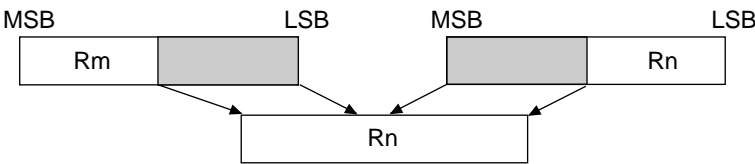

Operation

```
XTRCT(long m, long n)      /* XTRCT Rm,Rn */
{
    unsigned long temp;

    temp=(R[m]<<16)&0xFFFF0000;
    R[n]=(R[n]>>16)&0x0000FFFF;
    R[n]|=temp;
    PC+=2;
}
```

Example

```
XTRCTR0,R1 ;Before executionR0 = H'01234567, R1 = H'89ABCDEF
              ;After execution  R1 = H'456789AB
```



# ***11. Realtime Clock (RTC)***

---

## **11.1 Overview**

The SH7091 includes an on-chip realtime clock (RTC) and a 32.768 kHz crystal oscillator for use by the RTC.


### **11.1.1 Features**

The RTC has the following features.

- Clock and calendar functions (BCD display)  
Counts seconds, minutes, hours, day-of-week, days, months, and years.
- 1 to 64 Hz timer (binary display)  
The 64 Hz counter register indicates a state of 64 Hz to 1 Hz within the RTC frequency divider
- Start/stop function
- 0-second adjustment function
- Alarm interrupts  
Comparison with second, minute, hour, day-of-week, day, or month can be selected as the alarm interrupt condition
- Periodic interrupts  
An interrupt period of 1/256 second, 1/64 second, 1/16 second, 1/4 second, 1/2 second, 1 second, or 2 seconds can be selected
- Carry interrupt  
Carry interrupt function indicating a second counter carry, or a 64 Hz counter carry when the 64 Hz counter is read
- Automatic leap year adjustment

## 11.1.2 Block Diagram

Figure 11.1 shows a block diagram of the RTC.

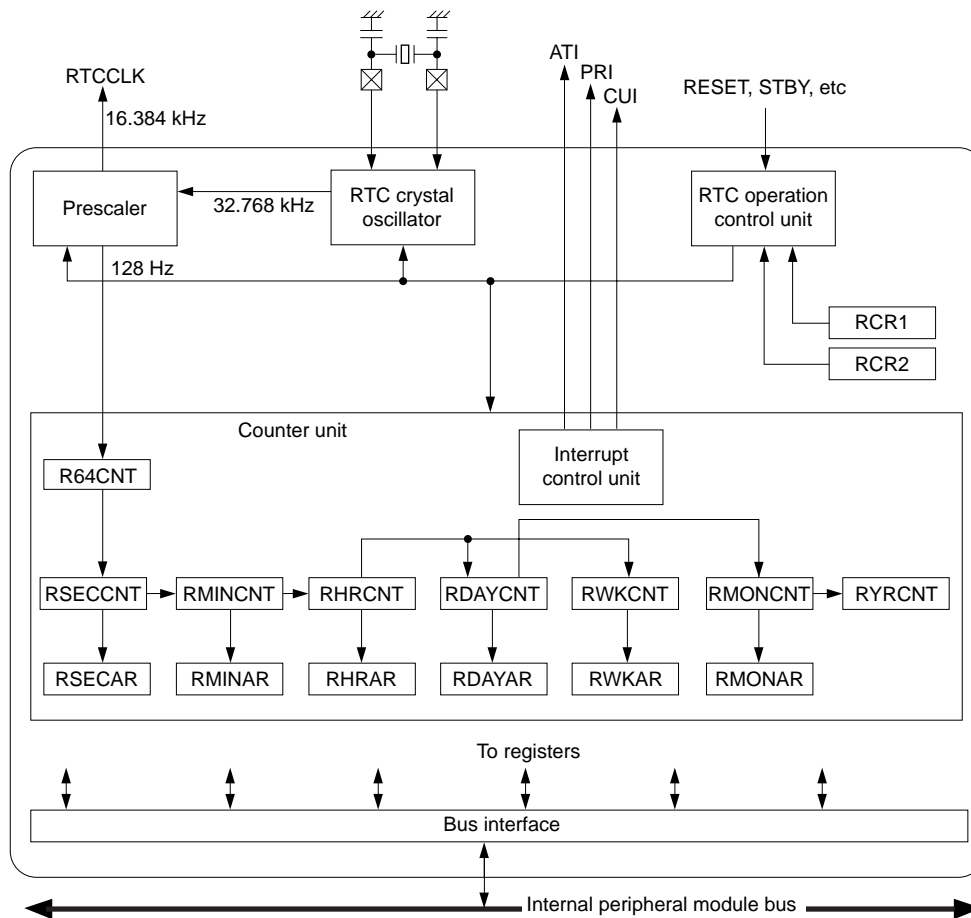

**Figure 11.1** Block Diagram of RTC

### 11.1.3 Pin Configuration

Table 11.1 shows the RTC pins.

**Table 11.1** *RTC Pins*

Pin Name	Abbreviation	I/O	Function
<b>RTC oscillator crystal pin</b>	EXTAL2	Input	Connects crystal to RTC oscillator
<b>RTC oscillator crystal pin</b>	XTAL2	Output	Connects crystal to RTC oscillator
<b>Clock input/clock output</b>	TCLK	I/O	External clock input pin/input capture control input pin/RTC output pin (shared with TMU)
<b>Dedicated RTC power supply</b>	VCC (RTC)	—	RTC oscillator power supply pin*
<b>Dedicated RTC GND pin</b>	VSS (RTC)	—	RTC oscillator GND pin*
<b>Note:</b>	Power must be supplied to the RTC power supply pins even when the RTC is not used. When the RTC is used, power should be supplied to all power supply pins including these pins. In standby mode, also, power should be supplied to all power supply pins including these pins.		

## 11.1.4 Register Configuration

Table 11.2 summarizes the RTC registers.

**Table 11.2** *RTC Registers*

Name	Abbreviation	R/W	Initialization			Initial Value	P4 Address	Area 7 Address	Access Size
			Power-On Reset	Manual Reset	Standby Mode				
<b>64 Hz counter</b>	R64CNT	R	Counts	Counts	Counts	Undefined	H'FFC80000	H'1FC80000	8
<b>Second counter</b>	RSECCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC80004	H'1FC80004	8
<b>Minute counter</b>	RMINCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC80008	H'1FC80008	8
<b>Hour counter</b>	RHRCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC8000C	H'1FC8000C	8
<b>Day-of-week counter</b>	RWKCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC80010	H'1FC80010	8
<b>Day counter</b>	RDAYCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC80014	H'1FC80014	8
<b>Month counter</b>	RMONCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC80018	H'1FC80018	8
<b>Year counter</b>	RYRCNT	R/W	Counts	Counts	Counts	Undefined	H'FFC8001C	H'1FC8001C	16
<b>Second alarm register</b>	RSECAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC80020	H'1FC80020	8
<b>Minute alarm register</b>	RMINAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC80024	H'1FC80024	8
<b>Hour alarm register</b>	RHRAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC80028	H'1FC80028	8
<b>Day-of-week alarm register</b>	RWKAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC8002C	H'1FC8002C	8
<b>Day alarm register</b>	RDAYAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC80030	H'1FC80030	8
<b>Month alarm register</b>	RMONAR	R/W	Initialized*1	Held	Held	Undefined*1	H'FFC80034	H'1FC80034	8
<b>RTC control register 1</b>	RCR1	R/W	Initialized	Initialized	Held	H'00*3	H'FFC80038	H'1FC80038	8
<b>RTC control register 2</b>	RCR2	R/W	Initialized	Initialized*2	Held	H'09*4	H'FFC8003C	H'1FC8003C	8
<b>Notes:</b>	<ol style="list-style-type: none"><li>1. The ENB bit in each register is initialized.</li><li>2. Bits other than the RTCEN bit and START bit are initialized.</li><li>3. The value of the CF bit and AF bit is undefined.</li><li>4. The value of the PEF bit is undefined.</li></ol>								



## 11.2 Register Descriptions

### 11.2.1 64 Hz Counter (R64CNT)

R64CNT is an 8-bit read-only register that indicates a state of 64 Hz to 1 Hz within the RTC frequency divider.

If this register is read when a carry is generated from the 128 kHz frequency division stage, bit 7 (CF) in RTC control register 1 (RCR1) is set to 1, indicating the simultaneous occurrence of the carry and the 64 Hz counter read. In this case, the read value is not valid, and so R64CNT must be read again after first writing 0 to the CF bit in RCR1 to clear it.

When the RESET bit or ADJ bit in RTC control register 2 (RCR2) is set to 1, the RTC frequency divider is initialized and R64CNT is initialized to H'00.

R64CNT is not initialized by a power-on or manual reset, or in standby mode.

Bit 7 is always read as 0 and cannot be modified.

Bit:	7	6	5	4	3	2	1	0
	—	1 Hz	2 Hz	4 Hz	8 Hz	16 Hz	32 Hz	64 Hz
Initial value:	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R	R	R	R	R	R	R

### 11.2.2 Second Counter (RSECCNT)

RSECCNT is an 8-bit readable/writable register used as a counter for setting and counting the BCD-coded second value in the RTC. It counts on the carry generated once per second by the 64 Hz counter.

The setting range is decimal 00 to 59. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RSECCNT is not initialized by a power-on or manual reset, or in standby mode.

Bit 7 is always read as 0. A write to this bit is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	10-second units			1-second units			
Initial value:	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R/W	R/W	R/W	R/W	R/W	R/W	R/W

11.2.3 Minute Counter (RMINCNT)

RMINCNT is an 8-bit readable/ writable register used as a counter for setting and counting the BCD-coded minute value in the RTC. It counts on the carry generated once per minute by the second counter.

The setting range is decimal 00 to 59. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RMINCNT is not initialized by a power-on or manual reset, or in standby mode.

Bit 7 is always read as 0. A write to this bit is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	10-minute units			1-minute units			
Initial value:	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R/W	R/W	R/W	R/W	R/W	R/W	R/W

11.2.4 Hour Counter (RHRCNT)

RHRCNT is an 8-bit readable/ writable register used as a counter for setting and counting the BCD-coded hour value in the RTC. It counts on the carry generated once per hour by the minute counter.

The setting range is decimal 00 to 23. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RHRCNT is not initialized by a power-on or manual reset, or in standby mode.

Bits 7 and 6 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	—	10-hour units		1-hour units			
Initial value:	0	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R	R/W	R/W	R/W	R/W	R/W	R/W

### 11.2.5 Day-of-Week Counter (RWKCNT)

RWKCNT is an 8-bit readable/writable register used as a counter for setting and counting the BCD-coded day-of-week value in the RTC. It counts on the carry generated once per day by the hour counter.

The setting range is decimal 0 to 6. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RWKCNT is not initialized by a power-on or manual reset, or in standby mode.

Bits 7 to 3 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	—	—	—	—	Day of week		
Initial value:	0	0	0	0	0	Undefined	Undefined	Undefined
R/W:	R	R	R	R	R	R/W	R/W	R/W

<b>Day-of-week code</b>	0	1	2	3	4	5	6
<b>Day of week</b>	Sun	Mon	Tue	Wed	Thu	Fri	Sat

### 11.2.6 Day Counter (RDAYCNT)

RDAYCNT is an 8-bit readable/writable register used as a counter for setting and counting the BCD-coded day value in the RTC. It counts on the carry generated once per day by the hour counter.

The setting range is decimal 01 to 31. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RDAYCNT is not initialized by a power-on or manual reset, or in standby mode.

The setting range for RDAYCNT depends on the month and whether the year is a leap year, so care is required when making the setting.

Bits 7 and 6 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	—	10-day units		1-day units			
Initial value:	0	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R	R/W	R/W	R/W	R/W	R/W	R/W

## 11.2.7 Month Counter (RMONCNT)

RMONCNT is an 8-bit readable/writable register used as a counter for setting and counting the BCD-coded month value in the RTC. It counts on the carry generated once per month by the day counter.

The setting range is decimal 01 to 12. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RMONCNT is not initialized by a power-on or manual reset, or in standby mode.

Bits 7 to 5 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	—	—	—	10-month unit	1-month units			
Initial value:	0	0	0	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R	R	R	R/W	R/W	R/W	R/W	R/W

## 11.2.8 Year Counter (RYRCNT)

RYRCNT is a 16-bit readable/writable register used as a counter for setting and counting the BCD-coded year value in the RTC. It counts on the carry generated once per year by the month counter.

The setting range is decimal 0000 to 9999. The RTC will not operate normally if any other value is set. Write processing should be performed after stopping the count with the START bit in RCR2, or by using the carry flag.

RYRCNT is not initialized by a power-on or manual reset, or in standby mode.

Bit:	15	14	13	12	11	10	9	8
	1000-year units				100-year units			
Initial value:	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Bit:	7	6	5	4	3	2	1	0
	10-year units				1-year units			
Initial value:	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

### 11.2.9 Second Alarm Register (RSECAR)

RSECAR is an 8-bit readable/writable register used as an alarm register for the RTC's BCD-coded second value counter, RSECCNT. When the ENB bit is set to 1, the RSECAR value is compared with the RSECCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 00 to 59 + ENB bit. The RTC will not operate normally if any other value is set.

The ENB bit in RSECAR is initialized to 0 by a power-on reset. The other fields in RSECAR are not initialized by a power-on or manual reset, or in standby mode.

Bit:	7	6	5	4	3	2	1	0
	ENB	10-second units			1-second units			
Initial value:	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

### 11.2.10 Minute Alarm Register (RMINAR)

RMINAR is an 8-bit readable/writable register used as an alarm register for the RTC's BCD-coded minute value counter, RMINCNT. When the ENB bit is set to 1, the RMINAR value is compared with the RMINCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 00 to 59 + ENB bit. The RTC will not operate normally if any other value is set.

The ENB bit in RMINAR is initialized by a power-on reset. The other fields in RMINAR are not initialized by a power-on or manual reset, or in standby mode.

Bit:	7	6	5	4	3	2	1	0
	ENB	10-minute units			1-minute units			
Initial value:	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

11.2.11 Hour Alarm Register (RHRAR)

RHRAR is an 8-bit readable/ writable register used as an alarm register for the RTC’s BCD-coded hour value counter, RHRCNT. When the ENB bit is set to 1, the RHRAR value is compared with the RHRCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 00 to 23 + ENB bit. The RTC will not operate normally if any other value is set.

The ENB bit in RHRAR is initialized by a power-on reset. The other fields in RHRAR are not initialized by a power-on or manual reset, or in standby mode.

Bit 6 is always read as 0. A write to this bit is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	ENB	—	10-hour units		1-hour units			
Initial value:	0	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R	R/W	R/W	R/W	R/W	R/W	R/W

11.2.12 Day-of-Week Alarm Register (RWKAR)

RWKAR is an 8-bit readable/ writable register used as an alarm register for the RTC’s BCD-coded day-of-week value counter, RWKCNT. When the ENB bit is set to 1, the RWKAR value is compared with the RWKCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 0 to 6 + ENB bit. The RTC will not operate normally if any other value is set.

The ENB bit in RWKAR is initialized by a power-on reset. The other fields in RWKAR are not initialized by a power-on or manual reset, or in standby mode.

Bits 6 to 3 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	ENB	—	—	—	—	Day of week		
Initial value:	0	0	0	0	0	Undefined	Undefined	Undefined
R/W:	R/W	R	R	R	R	R/W	R/W	R/W

Day-of-week code	0	1	2	3	4	5	6
Day of week	Sun	Mon	Tue	Wed	Thu	Fri	Sat

### 11.2.13 Day Alarm Register (RDAYAR)

RDAYAR is an 8-bit readable/ writable register used as an alarm register for the RTC's BCD-coded day value counter, RDAYCNT. When the ENB bit is set to 1, the RDAYAR value is compared with the RDAYCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 01 to 31 + ENB bit. The RTC will not operate normally if any other value is set. The setting range for RDAYAR depends on the month and whether the year is a leap year, so care is required when making the setting.

The ENB bit in RDAYAR is initialized by a power-on reset. The other fields in RDAYAR are not initialized by a power-on or manual reset, or in standby mode.

Bit 6 is always read as 0. A write to this bit is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	ENB	—	10-day units		1-day units			
Initial value:	0	0	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R	R/W	R/W	R/W	R/W	R/W	R/W

### 11.2.14 Month Alarm Register (RMONAR)

RMONAR is an 8-bit readable/ writable register used as an alarm register for the RTC's BCD-coded month value counter, RMONCNT. When the ENB bit is set to 1, the RMONAR value is compared with the RMONCNT value. Comparison between the counter and the alarm register is performed for those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1, and the RCR1 alarm flag is set when the respective values all match.

The setting range is decimal 01 to 12 + ENB bit. The RTC will not operate normally if any other value is set.

The ENB bit in RMONAR is initialized by a power-on reset. The other fields in RMONAR are not initialized by a power-on or manual reset, or in standby mode.

Bits 6 and 5 are always read as 0. A write to these bits is invalid, but the write value should always be 0.

Bit:	7	6	5	4	3	2	1	0
	ENB	—	—	10-month unit	1-month units			
Initial value:	0	0	0	Undefined	Undefined	Undefined	Undefined	Undefined
R/W:	R/W	R	R	R/W	R/W	R/W	R/W	R/W

## 11.2.15 RTC Control Register 1 (RCR1)

RCR1 is an 8-bit readable/writable register containing a carry flag and alarm flag, plus flags to enable or disable interrupts for these flags.

The CIE and AIE bits are initialized to 0 by a power-on or manual reset; the value of bits other than CIE and AIE is undefined. In standby mode RCR1 is not initialized, and retains its current value.

Bit:	7	6	5	4	3	2	1	0
	CF	—	—	CIE	AIE	—	—	AF
Initial value:	Undefined	Undefined	Undefined	0	0	Undefined	Undefined	Undefined
R/W:	R/W	R	R	R/W	R/W	R	R	R/W

**Bit 7—Carry Flag (CF):** This flag is set to 1 on generation of a second counter carry, or a 64 Hz counter carry when the 64 Hz counter is read. The count register value read at this time is not guaranteed, and so the count register must be read again.

Bit 7: CF	Description
0	No second counter carry, or 64 Hz counter carry when 64 Hz counter is read [Clearing condition] When 0 is written to CF
1	Second counter carry, or 64 Hz counter carry when 64 Hz counter is read [Setting conditions] <ul style="list-style-type: none"><li>• Generation of a second counter carry, or a 64 Hz counter carry when the 64 Hz counter is read</li><li>• When 1 is written to CF</li></ul>

**Bit 4—Carry Interrupt Enable Flag (CIE):** Enables or disables interrupt generation when the carry flag (CF) is set to 1.

Bit 4: CIE	Description
0	Carry interrupt is not generated when CF flag is set to 1 (Initial value)
1	Carry interrupt is generated when CF flag is set to 1

**Bit 3—Alarm Interrupt Enable Flag (AIE):** Enables or disables interrupt generation when the alarm flag (AF) is set to 1.

Bit 3: AIE	Description
0	Alarm interrupt is not generated when AF flag is set to 1 (Initial value)
1	Alarm interrupt is generated when AF flag is set to 1



**Bit 0—Alarm Flag (AF):** Set to 1 when the alarm time set in those registers among RSECAR, RMINAR, RHRAR, RWKAR, RDAYAR, and RMONAR in which the ENB bit is set to 1 matches the respective counter values.

Bit 0: AF	Description
0	Alarm registers and counter values do not match (Initial value) [Clearing condition] When 0 is written to AF
1	Alarm registers and counter values match* [Setting condition] When alarm registers in which the ENB bit is set to 1 and counter values match*
<b>Note:</b>	*Writing 1 does not change the value.

**Bits 6, 5, 2, and 1—Reserved.** The initial value of these bits is undefined. A write to these bits is invalid, but the write value should always be 0.

## 11.2.16 RTC Control Register 2 (RCR2)

RCR2 is an 8-bit readable/writable register used for periodic interrupt control, 30-second adjustment, and frequency divider RESET and RTC count control.

RCR2 is basically initialized to H'09 by a power-on reset, except that the value of the PEF bit is undefined. In a manual reset, bits other than RTCEN and START are initialized, while the value of the PEF bit is undefined. In standby mode RCR2 is not initialized, and retains its current value.

Bit:	7	6	5	4	3	2	1	0
	PEF	PES2	PES1	PES0	RTCEN	ADJ	RESET	START
Initial value:	Undefined	0	0	0	1	0	0	1
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

**Bit 7—Periodic Interrupt Flag (PEF):** Indicates interrupt generation at the interval specified by bits PES2–PES0. When this flag is set to 1, a periodic interrupt is generated.

Bit 7: PEF	Description
0	Interrupt is not generated at interval specified by bits PES2–PES0 [Clearing condition] When 0 is written to PEF
1	Interrupt is generated at interval specified by bits PES2–PES0 [Setting conditions] <ul style="list-style-type: none"> <li>• Generation of interrupt at interval specified by bits PES2–PES0</li> <li>• When 1 is written to PEF</li> </ul>

**Bits 6 to 4—Periodic Interrupt Enable (PES2–PES0):** These bits specify the period for periodic interrupts.

Bit 6: PES2	Bit 5: PES1	Bit 4: PES0	Description
0	0	0	No periodic interrupt generation (Initial value)
		1	Periodic interrupt generated at 1/256-second intervals
	1	0	Periodic interrupt generated at 1/64-second intervals
		1	Periodic interrupt generated at 1/16-second intervals
1	0	0	Periodic interrupt generated at 1/4-second intervals
		1	Periodic interrupt generated at 1/2-second intervals
	1	0	Periodic interrupt generated at 1-second intervals
		1	Periodic interrupt generated at 2-second intervals

**Bit 3—Oscillator Enable (RTCEN):** Controls the operation of the RTC's crystal oscillator.

Bit 3: RTCEN	Description
0	RTC crystal oscillator is halted
1	RTC crystal oscillator is operated (Initial value)

**Bit 2—30-Second Adjustment (ADJ):** Used for 30-second adjustment. When 1 is written to this bit, a value up to 29 seconds is rounded down to 00 seconds, and a value of 30 seconds or more is rounded up to 1 minute. The frequency divider circuits (RTC prescaler and R64CNT) are also reset at this time. This bit always returns 0 if read.

Bit 2: ADJ	Description
0	Normal clock operation (Initial value)
1	30-second adjustment performed

**Bit 1—Reset (RESET):** The frequency divider circuits are initialized by writing 1 to this bit. When 1 is written to the RESET bit, the frequency divider circuits (RTC prescaler and R64CNT) are reset and the RESET bit is automatically cleared to 0 (i.e. does not need to be written with 0).

Bit 1: RESET	Description
0	Normal clock operation (Initial value)
1	Frequency divider circuits are reset

**Bit 0—Start Bit (START):** Stops and restarts counter (clock) operation.


Bit 0: START	Description
0	Second, minute, hour, day, day-of-week, month, and year counters are stopped*
1	Second, minute, hour, day, day-of-week, month, and year counters operate normally* (Initial value)
<b>Note:</b>	*The 64 Hz counter continues to operate unless stopped by means of the RTCEN bit.

## 11.3 Operation

Examples of the use of the RTC are shown below.

### 11.3.1 Time Setting Procedures

Figure 11.2 shows examples of the time setting procedures.

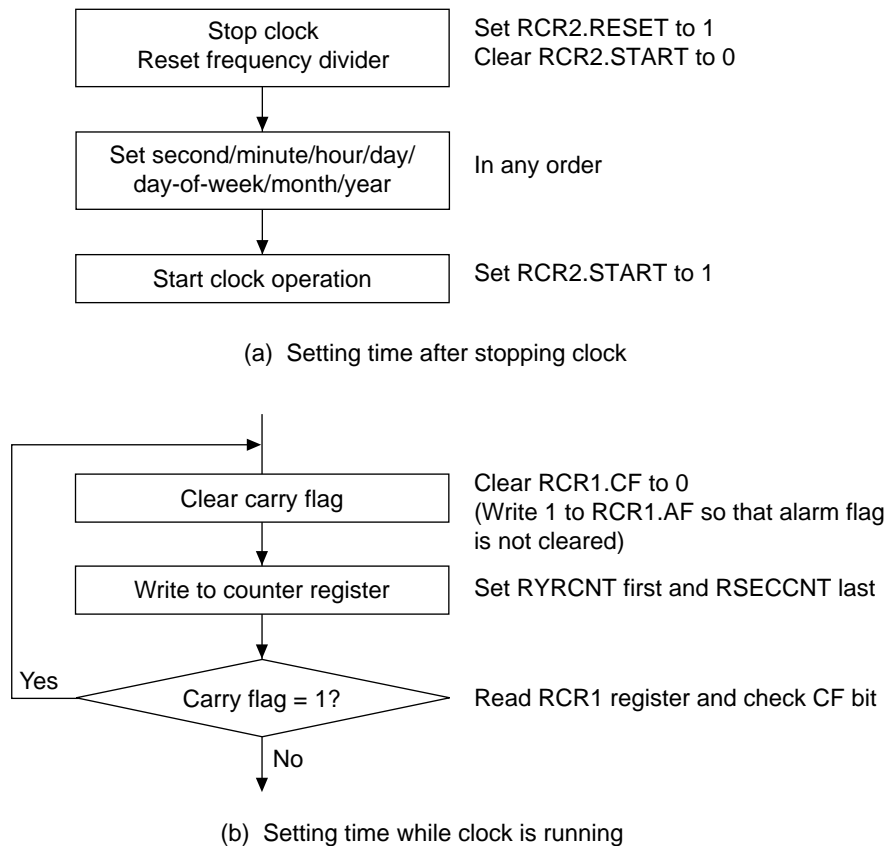

**Figure 11.2** Examples of Time Setting Procedures



The procedure for setting the time after stopping the clock is shown in (a). The programming for this method is simple, and it is useful for setting all the counters, from second to year.

The procedure for setting the time while the clock is running is shown in (b). This method is useful for modifying only certain counter values (for example, only the second data or hour data). If a carry occurs during the write operation, the write data is automatically updated and there will be an error in the set data. The carry flag should therefore be used to check the write status. If the carry flag (RCR1.CF) is set to 1, the write must be repeated.

The interrupt function can also be used to determine the carry flag status.

### 11.3.2 Time Reading Procedures

Figure 11.3 shows examples of the time reading procedures.

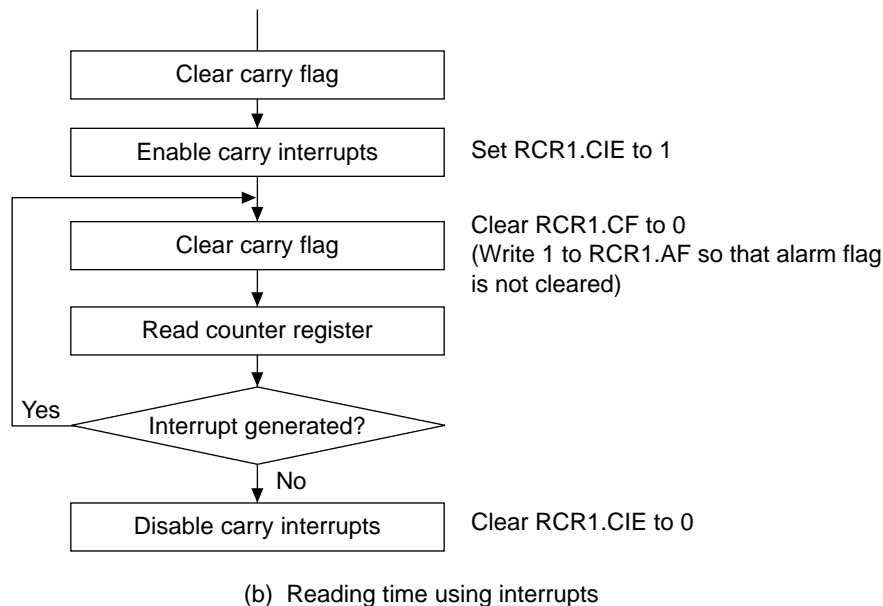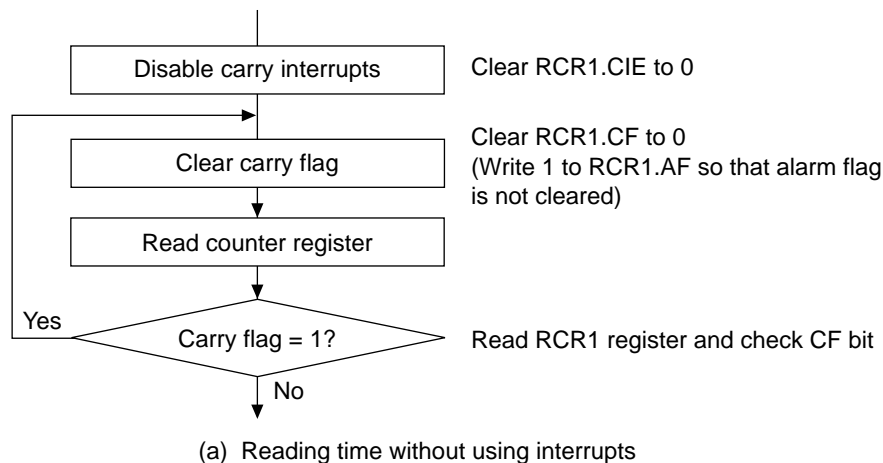


**Figure 11.3** Examples of Time Reading Procedures

If a carry occurs while the time is being read, the correct time will not be obtained and the read must be repeated. The procedure for reading the time without using interrupts is shown in (a), and the procedure using carry interrupts in (b). The method without using interrupts is normally used to keep the program simple.

### 11.3.3 Alarm Function

The use of the alarm function is illustrated in Figure 11.4.

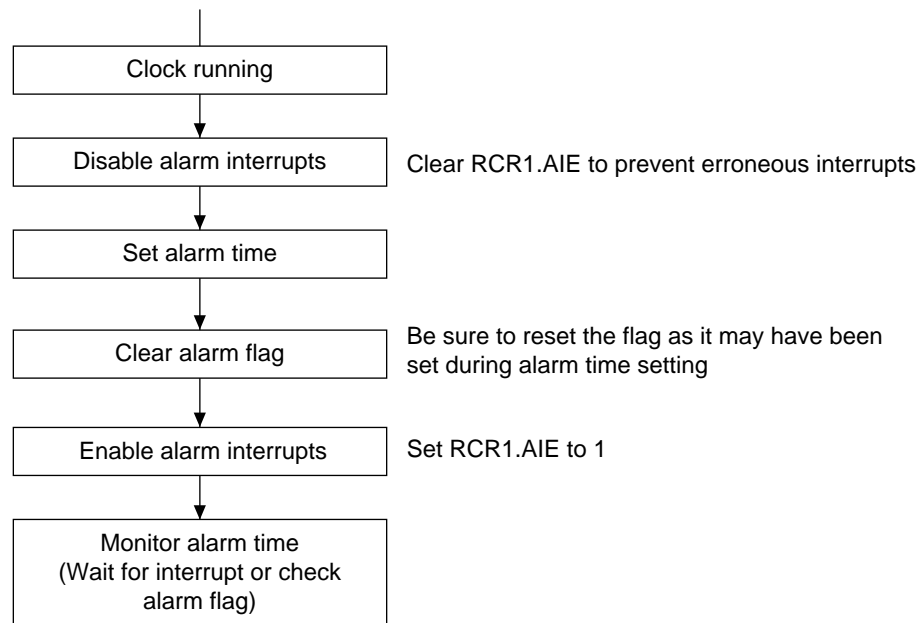

**Figure 11.4** Example of Use of Alarm Function

An alarm can be generated by the second, minute, hour, day-of-week, day, or month value, or a combination of these. Write 1 to the ENB bit in the alarm registers involved in the alarm setting, and set the alarm time in the lower bits. Write 0 to the ENB bit in registers not involved in the alarm setting.

When the counter and the alarm time match, RCR1.AF is set to 1. Alarm detection can be confirmed by reading this bit, but normally an interrupt is used. If 1 has been written to RCR1.AIE, an alarm interrupt is generated in the event of alarm, enabling the alarm to be detected.

The alarm flag remains set while the counter and alarm time match. If the alarm flag is cleared by writing 0 during this period, it will therefore be set again immediately afterward. This needs to be taken into consideration when writing the program.

## 11.4 Interrupts

There are three kinds of RTC interrupt: alarm interrupts, periodic interrupts, and carry interrupts.

An alarm interrupt request (ATI) is generated when the alarm flag (AF) in RCR1 is set to 1 while the alarm interrupt enable bit (AIE) is also set to 1.

A periodic interrupt request (PRI) is generated when the periodic interrupt enable bits (PES2–PES0) in RCR2 are set to a value other than 000 and the periodic interrupt flag (PEF) is set to 1.

A carry interrupt request (CUI) is generated when the carry flag (CF) in RCR1 is set to 1 while the carry interrupt enable bit (CIE) is also set to 1.





## ***12. Timer Unit (TMU)***

---

### **12.1 Overview**

The SH7091 includes an on-chip 32-bit timer unit (TMU) comprising three 32-bit timer channels (channels 0 to 2).

#### **12.1.1 Features**

The TMU has the following features.

- Auto-reload type 32-bit down-counter provided for each channel
- Input capture function provided in channel 2
- Selection of rising edge or falling edge as external clock input edge when external clock is selected or input capture function is used
- 32-bit timer constant register for auto-reload use, readable/ writable at any time, and 32-bit down-counter provided for each channel
- Selection of seven counter input clocks for each channel


External clock (TCLK), on-chip RTC output clock, five internal clocks ( $P\phi/4$ ,  $P\phi/16$ ,  $P\phi/64$ ,  $P\phi/256$ ,  $P\phi/1024$ ) ( $P\phi$  is the peripheral module clock)

- Each channel can also operate in module standby mode when the on-chip RTC output clock is selected as the counter input clock; that is, timer operation continues even when the clock has been stopped for the TMU.

Timer count operations using an external or internal clock are only possible when a clock is supplied to the timer unit.

- Synchronous read operation

As the timer counters (TCNT) are serially modified 32-bit registers and the internal peripheral module bus is 16 bits wide, there is a time difference when reading the upper 16 bits and lower 16 bits of TCNT. To prevent counter read value drift due to this time difference, a synchronization circuit is provided that allows simultaneous reading of all 32 bits of the TCNT data.

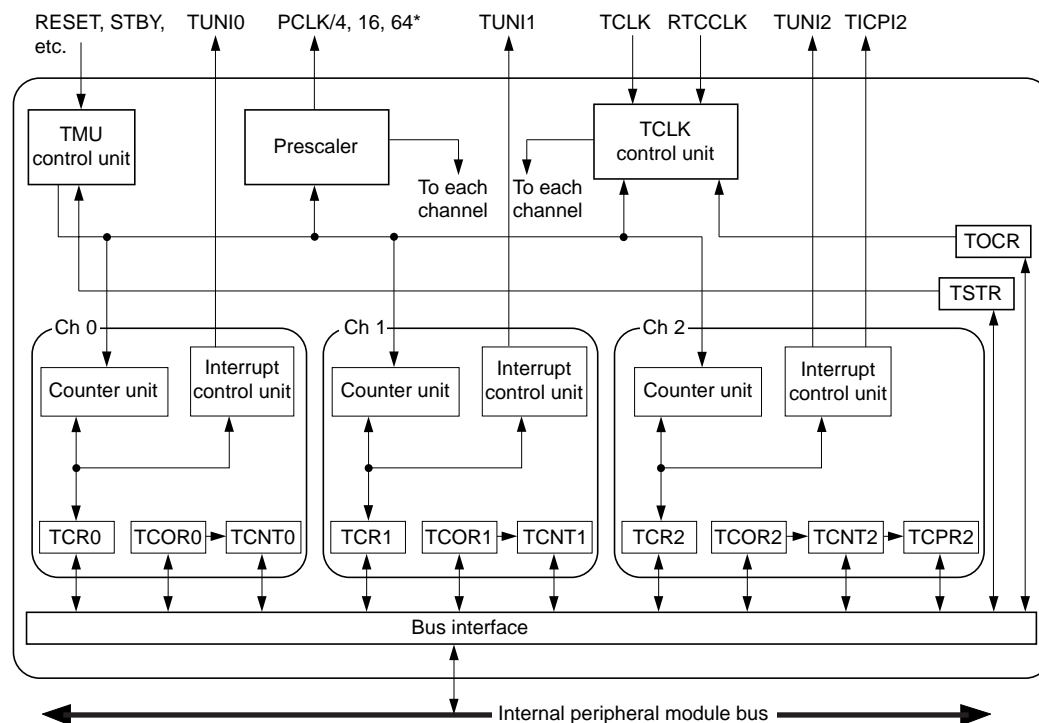

Note: \* Signals with 1/4, 1/16, and 1/64 the P<sub>0</sub> frequency, supplied to the on-chip peripheral functions.

**Figure 12.1** *Block Diagram of TMU*

Pin Name	Abbreviation	I/O	Function
<b>Clock input/clock output</b>	TCLK	I/O	External clock input pin/input capture control input pin/RTC output pin (shared with RTC)



## 12.1.4 Register Configuration

Table 12.2 summarizes the TMU registers.

**Table 12.2 TMU Registers**

Channel	Name	Abbreviation	R/W	Initialization			Initial Value	P4 Address	Area 7 Address	Access Size
				Power-On Reset	Manual Reset	Stand-by Mode				
<b>Common</b>	Timer output control register	TOCR	R/W	Initialized	Initialized	Held	H'00	H'FFD80000	H'1FD80000	8
	Timer start register	TSTR	R/W	Initialized	Initialized	Initialized*1	H'00	H'FFD80004	H'1FD80004	8
<b>0</b>	Timer constant register 0	TCOR0	R/W	Initialized	Initialized	Held	H'FFFFFFF	H'FFD80008	H'1FD80008	32
	Timer counter 0	TCNT0	R/W	Initialized	Initialized	Held*2	H'FFFFFFF	H'FFD8000C	H'1FD8000C	32
	Timer control register 0	TCR0	R/W	Initialized	Initialized	Held	H'0000	H'FFD80010	H'1FD80010	16
<b>1</b>	Timer constant register 1	TCOR1	R/W	Initialized	Initialized	Held	H'FFFFFFF	H'FFD80014	H'1FD80014	32
	Timer counter 1	TCNT1	R/W	Initialized	Initialized	Held*2	H'FFFFFFF	H'FFD80018	H'1FD80018	32
	Timer control register 1	TCR1	R/W	Initialized	Initialized	Held	H'0000	H'FFD8001C	H'1FD8001C	16
<b>2</b>	Timer constant register 2	TCOR2	R/W	Initialized	Initialized	Held	H'FFFFFFF	H'FFD80020	H'1FD80020	32
	Timer counter 2	TCNT2	R/W	Initialized	Initialized	Held*2	H'FFFFFFF	H'FFD80024	H'1FD80024	32
	Timer control register 2	TCR2	R/W	Initialized	Initialized	Held	H'0000	H'FFD80028	H'1FD80028	16
	Input capture register	TCPR2	R	Held	Held	Held	Undefined	H'FFD8002C	H'1FD8002C	32
<b>Notes:</b>		1. Not initialized in module standby mode when the input clock is the on-chip RTC output clock. 2. Counts in module standby mode when the input clock is the on-chip RTC output clock.								

## 12.2 Register Descriptions

### 12.2.1 Timer Output Control Register (TOCR)

TOCR is an 8-bit readable/writable register that specifies whether external pin TCLK is used as the external clock or input capture control input pin, or as the on-chip RTC output clock output pin.

TOCR is initialized to H'00 by a power-on or manual reset, but is not initialized in standby mode.

Bit:	7	6	5	4	3	2	1	0
	—	—	—	—	—	—	—	TCOE
Initial value:	0	0	0	0	0	0	0	0
R/W:	R	R	R	R	R	R	R	R/W

**Bits 7 to 1—Reserved:** These bits are always read as 0. A write to these bits is invalid, but the write value should always be 0.

**Bit 0—Timer Clock Pin Control (TCOE):** Specifies whether timer clock pin TCLK is used as the external clock or input capture control input pin, or as the on-chip RTC output clock output pin.

Bit 0: TCOE	Description
0	Timer clock pin (TCLK) is used as external clock input or input capture control input pin (Initial value)
1	Timer clock pin (TCLK) is used as on-chip RTC output clock output pin

### 12.2.2 Timer Start Register (TSTR)

TSTR is an 8-bit readable/writable register that specifies whether the channel 0–2 timer counters (TCNT) are operated or stopped.

TSTR is initialized to H'00 by a power-on or manual reset. In module standby mode, TSTR is not initialized when the input clock selected by each channel is the on-chip RTC output clock (RTCCLK), and is initialized only when the input clock is the external clock (TCLK) or internal clock (Pφ).

Bit:	7	6	5	4	3	2	1	0
	—	—	—	—	—	STR2	STR1	STR0
Initial value:	0	0	0	0	0	0	0	0
R/W:	R	R	R	R	R	R/W	R/W	R/W

**Bits 7 to 3—Reserved:** These bits are always read as 0. A write to these bits is invalid, but the write value should always be 0.

**Bit 2—Counter Start 2 (STR2):** Specifies whether timer counter 2 (TCNT2) is operated or stopped.

Bit 2: STR2	Description
0	TCNT2 count operation is stopped (Initial value)
1	TCNT2 performs count operation

**Bit 1—Counter Start 1 (STR1):** Specifies whether timer counter 1 (TCNT1) is operated or stopped.


Bit 1: STR1	Description
0	TCNT1 count operation is stopped (Initial value)
1	TCNT1 performs count operation

**Bit 0—Counter Start 0 (STR0):** Specifies whether timer counter 0 (TCNT0) is operated or stopped.

Bit 0: STR0	Description
0	TCNT0 count operation is stopped (Initial value)
1	TCNT0 performs count operation

12.2.3 Timer Constant Registers (TCOR)

The TCOR registers are 32-bit readable/writable registers. There are three TCOR registers, one for each channel. When a TCNT counter underflows while counting down, the TCOR value is set in that TCNT, which continues counting down from the set value. The TCOR registers are initialized to H'FFFFFFFF by a power-on or manual reset, but are not initialized and retain their contents in standby mode.

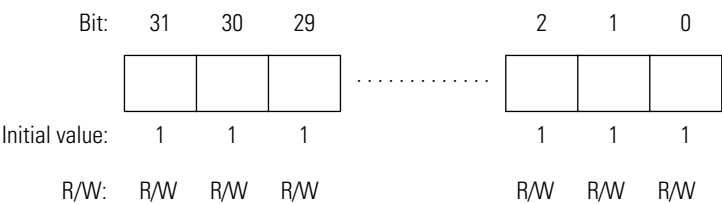


12.2.4 Timer Counters (TCNT)

The TCNT registers are 32-bit readable/ writable registers. There are three TCNT registers, one for each channel. Each TCNT counts down on the input clock selected by TPSC2–TPSC0 in the timer control register (TCR). When a TCNT counter underflows while counting down, the underflow flag (UNF) is set in the corresponding timer control register (TCR). At the same time, the timer constant register (TCOR) value is set in TCNT, and the count-down operation continues from the set value.

As the TCNT registers are serially modified 32-bit registers and the internal peripheral module bus is 16 bits wide, there is a time difference when reading the upper 16 bits and lower 16 bits of TCNT. To prevent counter read value drift due to this time difference, a synchronization circuit is provided. When the upper 16 bits are read, the lower 16 bits are simultaneously stored in a buffer register. After the upper 16 bits are read, the lower 16 bits are read from the buffer register.

The TCNT registers are initialized to H'FFFFFFFF by a power-on or manual reset, but are not initialized and retain their contents in standby mode.

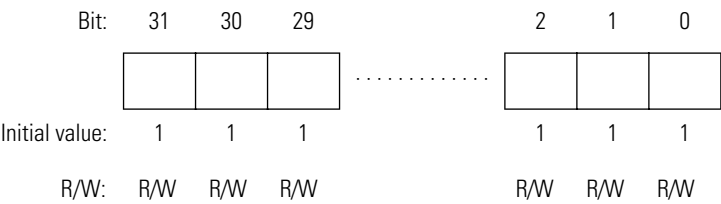

When the input clock is the on-chip RTC output clock (RTCCLK), TCNT counts even in module standby mode (that is, when the clock for the TMU is stopped). When the input clock is the external clock (TCLK) or internal clock (Pf), TCNT contents are retained in standby mode.

12.2.5 Timer Control Registers (TCR)

The TCR registers are 16-bit readable/ writable registers. There are three TCR registers, one for each channel. Each TCR selects the count clock, specifies the edge when an external clock is selected, and controls interrupt generation when the flag indicating timer counter (TCNT) underflow is set to 1. TCR2 is also used for channel 2 input capture control, and control of interrupt generation in the event of input capture.

The TCR registers are initialized to H'0000 by a power-on or manual reset, but are not initialized in standby mode.

### 1) Channel 0 and 1 TCR bit configuration

Bit:	15	14	13	12	11	10	9	8
	—	—	—	—	—	—	—	UNF
Initial value:	0	0	0	0	0	0	0	0
R/W:	R	R	R	R	R	R	R	R/W

Bit:	7	6	5	4	3	2	1	0
	—	—	UNIE	CKEG1	CKEG0	TPSC2	TPSC1	TPSC0
Initial value:	0	0	0	0	0	0	0	0
R/W:	R	R	R/W	R/W	R/W	R/W	R/W	R/W

### 2) Channel 2 TCR bit configuration

Bit:	15	14	13	12	11	10	9	8
	—	—	—	—	—	—	ICPF	UNF
Initial value:	0	0	0	0	0	0	0	0
R/W:	R	R	R	R	R	R/W	R/W	R/W

Bit:	7	6	5	4	3	2	1	0
	ICPE1	ICPE0	UNIE	CKEG1	CKEG0	TPSC2	TPSC1	TPSC0
Initial value:	0	0	0	0	0	0	0	0
R/W:	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

**Bits 15 to 9, 7, and 6 (Channels 0 and 1); Bits 15 to 10 (Channel 2)—Reserved:** These bits are always read as 0. A write to these bits is invalid, but the write value should always be 0.

**Bit 9—Input Capture Interrupt Flag (ICPF) (Channel 2 Only):** Status flag, provided in channel 2 only, that indicates the occurrence of input capture.

Bit 9: ICPF	Description
0	Input capture has not occurred (Initial value) [Clearing condition] When 0 is written to ICPF
1	Input capture has occurred [Setting condition] When input capture occurs*
<b>Note:</b>	*Writing 1 does not change the value.

**Bit 8—Underflow Flag (UNF):** Status flag that indicates the occurrence of underflow.

Bit 8: UNF	Description
0	TCNT has not underflowed (Initial value) [Clearing condition] When 0 is written to UNF
1	TCNT has underflowed [Setting condition] When TCNT underflows*
<b>Note:</b>	*Writing 1 does not change the value.

**Bits 7 and 6—Input Capture Control (ICPE1, ICPE0) (Channel 2 Only):** These bits, provided in channel 2 only, specify whether the input capture function is used, and control enabling or disabling of interrupt generation when the function is used.

When the input capture function is used, a data transfer request is sent to the DMAC in the event of input capture.

When using the input capture function, the TCLK pin must be designated as an input pin with the TCOE bit in the TOCR register. The CKEG bits specify whether the rising edge or falling edge of the TCLK signal is used to set the TCNT2 value in the input capture register (TCPR2).

The TCNT2 value is set in TCPR2 only when the TCR2.ICPF bit is 0. When the TCR2.ICPF bit is 1, TCPR2 is not set in the event of input capture. When input capture occurs, a DMAC transfer request is generated regardless of the value of the TCR2.ICPF bit. However, a new DMAC transfer request is not generated until processing of the previous request is finished.

Bit 7: ICPE1	Bit 6: ICPE0	Description
0	0	Input capture function is not used (Initial value)
	1	Reserved (Do not set)
1	0	Input capture function is used, but interrupt due to input capture (TICPI2) is not enabled Data transfer request is sent to DMAC in the event of input capture
	1	Input capture function is used, and interrupt due to input capture (TICPI2) is enabled Data transfer request is sent to DMAC in the event of input capture

**Bit5—Underflow Interrupt Control (UNIE):** Controls enabling or disabling of interrupt generation when the UNF status flag is set to 1, indicating TCNT underflow.

Bit 5: UNIE	Description
0	Interrupt due to underflow (TUNI) is not enabled (Initial value)
1	Interrupt due to underflow (TUNI) is enabled

**Bits 4 and 3—Clock Edge 1 and 0 (CKEG1, CKEG0):** These bits select the external clock input edge when an external clock is selected or the input capture function is used.

Bit 4: CKEG1	Bit 3: CKEG0	Description
0	0	Count/input capture register set on rising edge (Initial value)
	1	Count/input capture register set on falling edge
1	X	Count/input capture register set on both rising and falling edges
<b>Note:</b>	<b>X: 0 or 1 (don't care)</b>	

**Bits 2 to 0—Timer Prescaler 2 to 0 (TPSC2–TPSC0):** These bits select the TCNT count clock.

When the on-chip RTC output clock is selected as the count clock for a channel, that channel can operate even in module standby mode. When another clock is selected, the channel does not operate in standby mode.


Bit 2: TPSC2	Bit 1: TPSC1	Bit 0: TPSC0	Description
0	0	0	Counts on P $\phi$ /4 (Initial value)
		1	Counts on P $\phi$ /16
	1	0	Counts on P $\phi$ /64
		1	Counts on P $\phi$ /256
1	0	0	Counts on P $\phi$ /1024
		1	Reserved (Do not set)
	1	0	Counts on on-chip RTC output clock
		1	Counts on external clock

### 12.2.6 Input Capture Register (TCPR2)

TCPR2 is a 32-bit read-only register for use with the input capture function, provided only in channel 2.

The input capture function is controlled by means of the input capture control bits (ICPE1, ICPE0) and clock edge bits (CKEG1, CKEG0) in TCR2. When input capture occurs, the TCNT2 value is copied into TCPR2. The value is set in TCPR2 only when the ICPF bit in TCR2 is 0.

TCPR2 is not initialized by a power-on or manual reset, or in standby mode.

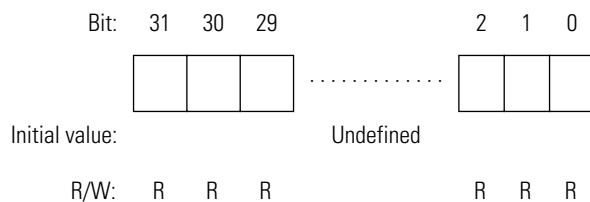

## 12.3 Operation

Each channel has a 32-bit timer counter (TCNT) that performs count-down operations, and a 32-bit timer constant register (TCOR). The channels have an auto-reload function that allows cyclic count operations, and can also perform external event counting. Channel 2 also has an input capture function.


### 12.3.1 Counter Operation

When one of bits STR0–STR2 is set to 1 in the timer start register (TSTR), the timer counter (TCNT) for the corresponding channel starts counting. When TCNT underflows, the UNF flag is set in the corresponding timer control register (TCR). If the UNIE bit in TCR is set to 1 at this time, an interrupt request is sent to the CPU. At the same time, the value is copied from TCOR into TCNT, and the count-down continues (auto-reload function).

**Example of Count Operation Setting Procedure:** Figure 12.2 shows an example of the count operation setting procedure.




- 1) Select the count clock with bits TPSC2–TPSC0 in the timer control register (TCR). When an external clock is selected, set the TCLK pin to input mode with the TCOE bit in TOCR, and select the external clock edge with bits CKEG1 and CKEG0 in TCR.
- 2) Specify whether an interrupt is to be generated on TCNT underflow with the UNIE bit in TCR.
- 3) When the input capture function is used, set the ICPE bits in TCR, including specification of whether the interrupt function is to be used.
- 4) Set a value in the timer constant register (TCOR).
- 5) Set the initial value in the timer counter (TCNT).
- 6) Set the STR bit to 1 in the timer start register (TSTR) to start the count.

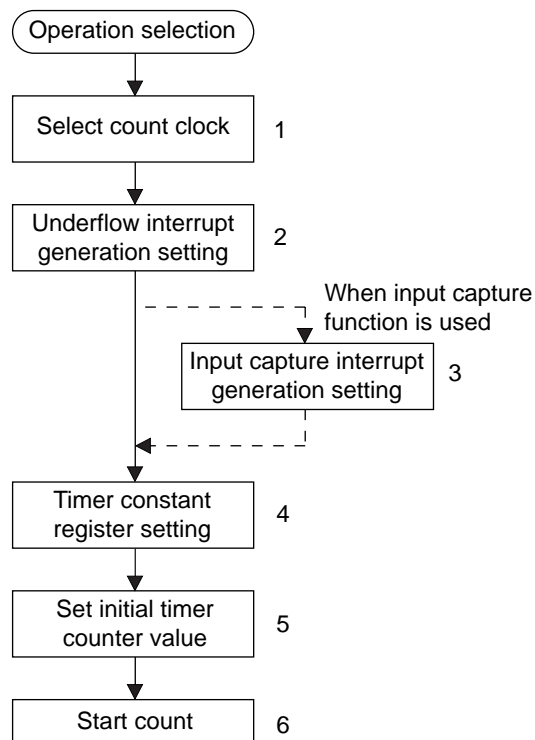

Note: When an interrupt is generated, clear the source flag in the interrupt handler. If the interrupt enabled state is set without clearing the flag, another interrupt will be generated.

**Figure 12.2** Example of Count Operation Setting Procedure

**Auto-Reload Count Operation:** Figure 12.3 shows the TCNT auto-reload operation.

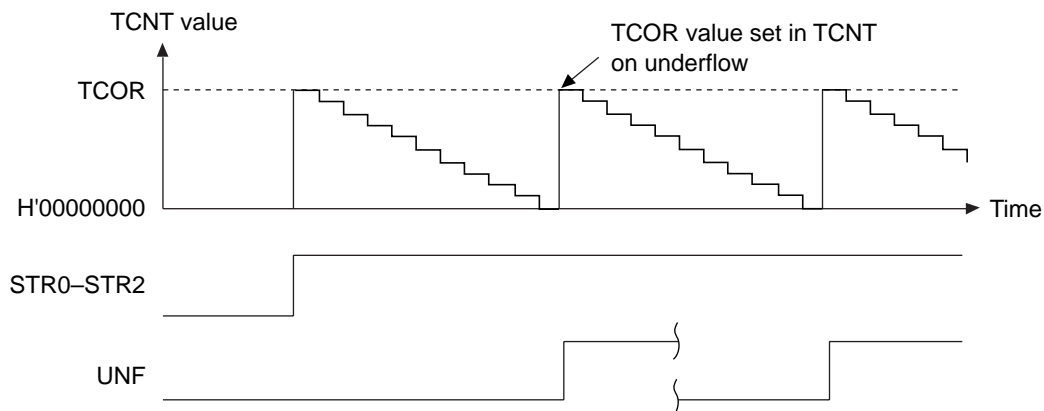


**Figure 12.3** TCNT Auto-Reload Operation

### TCNT Count Timing:

- Operating on internal clock

Any of five count clocks ( $Pf/4$ ,  $Pf/16$ ,  $Pf/64$ ,  $Pf/256$ , or  $Pf/1024$ ) scaled from the peripheral module clock can be selected as the count clock by means of the TPSC2–TPSC0 bits in TCR.

Figure 12.4 shows the timing in this case.

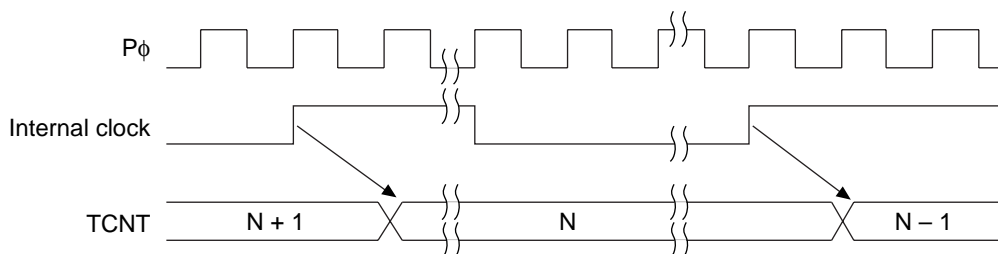


**Figure 12.4** Count Timing when Operating on Internal Clock

- Operating on external clock

External clock pin (TCLK) input can be selected as the timer clock by means of the TPSC2–TPSC0 bits in TCR. The detected edge (rising, falling, or both edges) can be selected with the CKEG1 and CKEG0 bits in TCR.


Figure 12.5 shows the timing for both-edge detection.

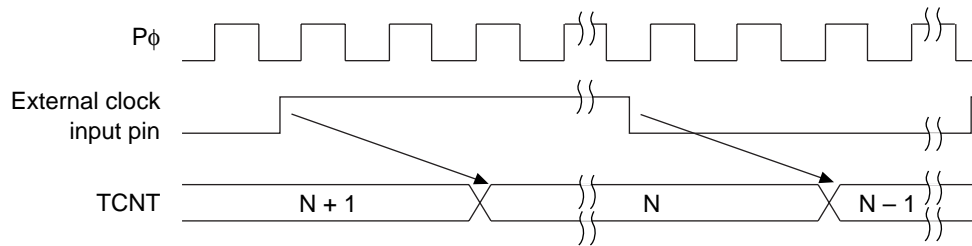

**Figure 12.5** Count Timing when Operating on External Clock

- Operating on on-chip RTC output clock

The on-chip RTC output clock can be selected as the timer clock by means of the TPSC2–TPSC0 bits in TCR. Figure 12.6 shows the timing in this case.

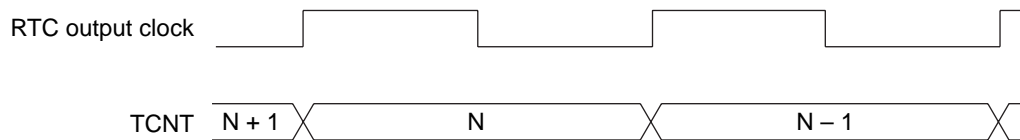

**Figure 12.6** Count Timing when Operating on On-Chip RTC Output Clock

## 12.3.2 Input Capture Function

Channel 2 has an input capture function.

The procedure for using the input capture function is as follows:

- 1) Use the TCOE bit in the timer output control register (TOCR) to set the TCLK pin to input mode.
- 2) Use bits TPSC2–TPSC0 in the timer control register (TCR) to set an internal clock or the on-chip RTC output clock as the timer operating clock.
- 3) Use bits IPCE1 and IPCE0 in TCR to specify use of the input capture function, and whether interrupts are to be generated when this function is used.
- 4) Use bits CKEG1 and CKEG0 in TCR to specify whether the rising or falling edge of the TCLK signal is to be used to set the timer counter (TCNT) value in the input capture register (TCPR2).

This function cannot be used in standby mode.

When input capture occurs, the TCNT2 value is set in TCPR2 only when the ICPF bit in TCR2 is 0. Also, a new DMAC transfer request is not generated until processing of the previous request is finished.

Figure 12.7 shows the operation timing when the input capture function is used (with TCLK rising edge detection).

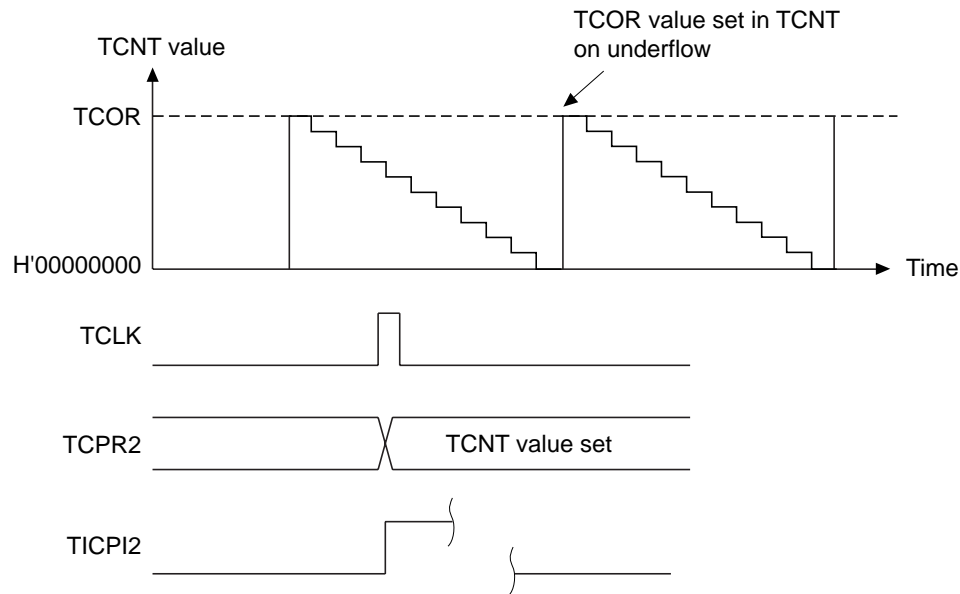


Figure 12.7 Operation Timing when Using Input Capture Function

## 12.4 Interrupts

There are four TMU interrupt sources, comprising underflow interrupts and the input capture interrupt (when the input capture function is used). Underflow interrupts are generated on channels 0 to 2, and input capture interrupts on channel 2 only.

An underflow interrupt request is generated (for each channel) according to the AND of UNF and the interrupt enable bit (UNIE) in TCR.

When the input capture function is used and an input capture request is generated, an interrupt is requested if the input capture input flag (ICPF) in TCR2 is 1 and the input capture control bits (ICPE1, ICPE0) in TCR2 are 11.

The TMU interrupt sources are summarized in Table 12.3.

Table 12.3 TMU Interrupt Sources

Channel	Interrupt Source	Description	Priority
0	TUNI0	Underflow interrupt 0	High
1	TUNI1	Underflow interrupt 1	↑
2	TUNI2	Underflow interrupt 2	↓
	TICPI2	Input capture interrupt 2	Low

## **12.5 Usage Notes**

### **12.5.1 Register Writes**

When performing a register write, timer count operation must be stopped by clearing the start bit (STR0–STR2) for the relevant channel in the timer start register (TSTR).

### **12.5.2 TCNT Register Reads**

When performing a TCNT register read, processing for synchronization with the timer count operation is performed. If a timer count operation and register read processing are performed simultaneously, the TCNT counter value prior to the count-down operation is read by means of the synchronization processing.

### **12.5.3 Resetting the RTC Frequency Divider**

When the on-chip RTC output clock is selected as the count clock, the RTC frequency divider should be reset.

### **12.5.4 External Clock Frequency**

Ensure that the external clock frequency for any channel does not exceed  $Pf/4$ .





# A. User's Manual Supplement

## Appendix A Address List

Table 1: Address List

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchro- nization Clock
CCN	PTEH	H'FF00 0000	H'1F00 0000	32	Undefined	Undefined	Held	Held	Iclk
CCN	PTEL	H'FF00 0004	H'1F00 0004	32	Undefined	Undefined	Held	Held	Iclk
CCN	TTB	H'FF00 0008	H'1F00 0008	32	Undefined	Undefined	Held	Held	Iclk
CCN	TEA	H'FF00 000C	H'1F00 000C	32	Undefined	Held	Held	Held	Iclk
CCN	MMUCR	H'FF00 0010	H'1F00 0010	32	H'0000 0000	H'0000 0000	Held	Held	Iclk
CCN	BASRA	H'FF00 0014	H'1F00 0014	8	Undefined	Held	Held	Held	Iclk
CCN	BASRB	H'FF00 0018	H'1F00 0018	8	Undefined	Held	Held	Held	Iclk
CCN	CCR	H'FF00 001C	H'1F00 001C	32	H'0000 0000	H'0000 0000	Held	Held	Iclk
CCN	TRA	H'FF00 0020	H'1F00 0020	32	Undefined	Undefined	Held	Held	Iclk

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchro- nization Clock
CCN	EXPEVT	H'FF00 0024	H'1F00 0024	32	H'0000 0000	H'0000 0020	Held	Held	Iclk
CCN	INTEVT	H'FF00 0028	H'1F00 0028	32	Undefined	Undefined	Held	Held	Iclk
CCN	PTEA	H'FF00 0034	H'1F00 0034	32	Undefined	Undefined	Held	Held	Iclk
CCN	QACR0	H'FF00 0038	H'1F00 0038	32	Undefined	Undefined	Held	Held	Iclk
CCN	QACR1	H'FF00 003C	H'1F00 003C	32	Undefined	Undefined	Held	Held	Iclk
UBC	BARA	H'FF20 0000	H'1F20 0000	32	Undefined	Held	Held	Held	Iclk
UBC	BAMRA	H'FF20 0004	H'1F20 0004	8	Undefined	Held	Held	Held	Iclk
UBC	BBRA	H'FF20 0008	H'1F20 0008	16	H'0000	Held	Held	Held	Iclk
UBC	BARB	H'FF20 000C	H'1F20 000C	32	Undefined	Held	Held	Held	Iclk
UBC	BAMRB	H'FF20 0010	H'1F20 0010	8	Undefined	Held	Held	Held	Iclk
UBC	BBRB	H'FF20 0014	H'1F20 0014	16	H'0000	Held	Held	Held	Iclk
UBC	BDRB	H'FF20 0018	H'1F20 0018	32	Undefined	Held	Held	Held	Iclk
UBC	BDMRB	H'FF20 001C	H'1F20 001C	32	Undefined	Held	Held	Held	Iclk
UBC	BRCR	H'FF20 0020	H'1F20 0020	16	H'0000*2	Held	Held	Held	Iclk
BSC	BCR1	H'FF80 0000	H'1F80 0000	32	H'0000 0000*2	Held	Held	Held	Bclk
BSC	BCR2	H'FF80 0004	H'1F80 0004	16	H'3FFC*2	Held	Held	Held	Bclk
BSC	WCR1	H'FF80 0008	H'1F80 0008	32	H'7777 7777	Held	Held	Held	Bclk
BSC	WCR2	H'FF80 000C	H'1F80 000C	32	H'FFFE EFFF	Held	Held	Held	Bclk



Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchronization Clock
BSC	WCR3	H'FF80 0010	H'1F80 0010	32	H'0777 7777	Held	Held	Held	Bclk
BSC	MCR	H'FF80 0014	H'1F80 0014	32	H'0000 0000	Held	Held	Held	Bclk
BSC	PCR	H'FF80 0018	H'1F80 0018	16	H'0000	Held	Held	Held	Bclk
BSC	RTCSR	H'FF80 001C	H'1F80 001C	16	H'0000	Held	Held	Held	Bclk
BSC	RTCNT	H'FF80 0020	H'1F80 0020	16	H'0000	Held	Held	Held	Bclk
BSC	RTCOR	H'FF80 0024	H'1F80 0024	16	H'0000	Held	Held	Held	Bclk
BSC	RFCR	H'FF80 0028	H'1F80 0028	16	H'0000	Held	Held	Held	Bclk
BSC	PCTRA	H'FF80 002C	H'1F80 002C	32	H'0000 0000	Held	Held	Held	Bclk
BSC	PDTRA	H'FF80 0030	H'1F80 0030	16	Undefined	Held	Held	Held	Bclk
BSC	PCTRB	H'FF80 0040	H'1F80 0040	32	H'0000 0000	Held	Held	Held	Bclk
BSC	PDTRB	H'FF80 0044	H'1F80 0044	16	Undefined	Held	Held	Held	Bclk
BSC	GPIOIC	H'FF80 0048	H'1F80 0048	16	H'0000 0000	Held	Held	Held	Bclk
BSC	SDMR2	H'FF90 xxxx	H'1F90 xxxx	8	Write-only	Bclk			
BSC	SDMR3	H'FF94 xxxx	H'1F94 xxxx	8		Bclk			
DMAC	SAR0	H'FFA0 0000	H'1FA0 0000	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DAR0	H'FFA0 0004	H'1FA0 0004	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DMATCR0	H'FFA0 0008	H'1FA0 0008	32	Undefined	Undefined	Held	Held	Bclk
DMAC	CHCR0	H'FFA0 000C	H'1FA0 000C	32	H'0000 0000	H'0000 0000	Held	Held	Bclk
DMAC	SAR1	H'FFA0 0010	H'1FA0 0010	32	Undefined	Undefined	Held	Held	Bclk

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchro- nization Clock
DMAC	DAR1	H'FFA0 0014	H'1FA0 0014	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DMATCR1	H'FFA0 0018	H'1FA0 0018	32	Undefined	Undefined	Held	Held	Bclk
DMAC	CHCR1	H'FFA0 001C	H'1FA0 001C	32	H'0000 0000	H'0000 0000	Held	Held	Bclk
DMAC	SAR2	H'FFA0 0020	H'1FA0 0020	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DAR2	H'FFA0 0024	H'1FA0 0024	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DMATCR2	H'FFA0 0028	H'1FA0 0028	32	Undefined	Undefined	Held	Held	Bclk
DMAC	CHCR2	H'FFA0 002C	H'1FA0 002C	32	H'0000 0000	H'0000 0000	Held	Held	Bclk
DMAC	SAR3	H'FFA0 0030	H'1FA0 0030	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DAR3	H'FFA0 0034	H'1FA0 0034	32	Undefined	Undefined	Held	Held	Bclk
DMAC	DMATCR3	H'FFA0 0038	H'1FA0 0038	32	Undefined	Undefined	Held	Held	Bclk
DMAC	CHCR3	H'FFA0 003C	H'1FA0 003C	32	H'0000 0000	H'0000 0000	Held	Held	Bclk
DMAC	DMAOR	H'FFA0 0040	H'1FA0 0040	32	H'0000 0000	H'0000 0000	Held	Held	Bclk
CPG	FRQCR	H'FFC0 0000	H'1FC0 0000	16	*2	Held	Held	Held	Pclk
CPG	STBCR	H'FFC0 0004	H'1FC0 0004	8	H'00	Held	Held	Held	Pclk
CPG	WTCNT	H'FFC0 0008	H'1FC0 0008	8/ 16*3	H'00	Held	Held	Held	Pclk
CPG	WTCSR	H'FFC0 000C	H'1FC0 000C	8/ 16*3	H'00	Held	Held	Held	Pclk
CPG	STBCR2	H'FFC0 0010	H'1FC0 0010	8	H'00	Held	Held	Held	Pclk
RTC	R64CNT	H'FFC8 0000	H'1FC8 0000	8	Held	Held	Held	Held	Pclk

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchronization Clock
RTC	RSECCNT	H'FFC8 0004	H'1FC8 0004	8	Held	Held	Held	Held	Pclk
RTC	RMINCNT	H'FFC8 0008	H'1FC8 0008	8	Held	Held	Held	Held	Pclk
RTC	RHRCNT	H'FFC8 000C	H'1FC8 000C	8	Held	Held	Held	Held	Pclk
RTC	RWKCNT	H'FFC8 0010	H'1FC8 0010	8	Held	Held	Held	Held	Pclk
RTC	RDAYCNT	H'FFC8 0014	H'1FC8 0014	8	Held	Held	Held	Held	Pclk
RTC	RMONCNT	H'FFC8 0018	H'1FC8 0018	8	Held	Held	Held	Held	Pclk
RTC	RYRCNT	H'FFC8 001C	H'1FC8 001C	16	Held	Held	Held	Held	Pclk
RTC	RSECAR	H'FFC8 0020	H'1FC8 0020	8	Held*2	Held	Held	Held	Pclk
RTC	RMINAR	H'FFC8 0024	H'1FC8 0024	8	Held*2	Held	Held	Held	Pclk
RTC	RHRAR	H'FFC8 0028	H'1FC8 0028	8	Held*2	Held	Held	Held	Pclk
RTC	RWKAR	H'FFC8 002C	H'1FC8 002C	8	Held*2	Held	Held	Held	Pclk
RTC	RDAYAR	H'FFC8 0030	H'1FC8 0030	8	Held*2	Held	Held	Held	Pclk
RTC	RMONAR	H'FFC8 0034	H'1FC8 0034	8	Held*2	Held	Held	Held	Pclk
RTC	RCR1	H'FFC8 0038	H'1FC8 0038	8	H'00*2	H'00*2	Held	Held	Pclk
RTC	RCR2	H'FFC8 003C	H'1FC8 003C	8	H'09*2	H'00*2	Held	Held	Pclk
INTC	ICR	H'FFD0 0000	H'1FD0 0000	16	H'0000*2	H'0000*2	Held	Held	Pclk
INTC	IPRA	H'FFD0 0004	H'1FD0 0004	16	H'0000	H'0000	Held	Held	Pclk
INTC	IPRB	H'FFD0 0008	H'1FD0 0008	16	H'0000	H'0000	Held	Held	Pclk

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchro- nization Clock
INTC	IPRC	H'FFD0 000C	H'1FD0 000C	16	H'0000	H'0000	Held	Held	Pclk
TMU	TOCR	H'FFD8 0000	H'1FD8 0000	8	H'00	H'00	Held	Held	Pclk
TMU	TSTR	H'FFD8 0004	H'1FD8 0004	8	H'00	H'00	Held	H'00*2	Pclk
TMU	TCOR0	H'FFD8 0008	H'1FD8 0008	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCNT0	H'FFD8 000C	H'1FD8 000C	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCR0	H'FFD8 0010	H'1FD8 0010	16	H'0000	H'0000	Held	Held	Pclk
TMU	TCOR1	H'FFD8 0014	H'1FD8 0014	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCNT1	H'FFD8 0018	H'1FD8 0018	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCR1	H'FFD8 001C	H'1FD8 001C	16	H'0000	H'0000	Held	Held	Pclk
TMU	TCOR2	H'FFD8 0020	H'1FD8 0020	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCNT2	H'FFD8 0024	H'1FD8 0024	32	H'FFFF FFFF	H'FFFF FFFF	Held	Held	Pclk
TMU	TCR2	H'FFD8 0028	H'1FD8 0028	16	H'0000	H'0000	Held	Held	Pclk
TMU	TCPR2	H'FFD8 002C	H'1FD8 002C	32	Held	Held	Held	Held	Pclk
SCI	SCSMR1	H'FFE0 0000	H'1FE0 0000	8	H'00	H'00	Held	H'00	Pclk
SCI	SCBRR1	H'FFE0 0004	H'1FE0 0004	8	H'FF	H'FF	Held	H'FF	Pclk
SCI	SCSCR1	H'FFE0 0008	H'1FE0 0008	8	H'00	H'00	Held	H'00	Pclk
SCI	SCTDR1	H'FFE0 000C	H'1FE0 000C	8	H'FF	H'FF	Held	H'FF	Pclk
SCI	SCSSR1	H'FFE0 0010	H'1FE0 0010	8	H'84	H'84	Held	H'84	Pclk

Module	Register	P4 Address	Area 7 Address*1	Size	Power-On Reset	Manual Reset	Sleep	Standby	Synchronization Clock
SCI	SCRDR1	H'FFE0 0014	H'1FE0 0014	8	H'00	H'00	Held	H'00	Pclk
SCI	SCSCMR1	H'FFE0 0018	H'1FE0 0018	8	H'00	H'00	Held	H'00	Pclk
SCI	SCSPTR1	H'FFE0 001C	H'1FE0 001C	8	H'00*2	H'00*2	Held	H'00*2	Pclk
SCIF	SCSMR2	H'FFE8 0000	H'1FE8 0000	16	H'0000	H'0000	Held	Held	Pclk
SCIF	SCBRR2	H'FFE8 0004	H'1FE8 0004	8	H'FF	H'FF	Held	Held	Pclk
SCIF	SCSCR2	H'FFE8 0008	H'1FE8 0008	16	H'0000	H'0000	Held	Held	Pclk
SCIF	SCFTDR2	H'FFE8 000C	H'1FE8 000C	8	Undefined	Undefined	Held	Held	Pclk
SCIF	SCFSR2	H'FFE8 0010	H'1FE8 0010	16	H'0060	H'0060	Held	Held	Pclk
SCIF	SCFRDR2	H'FFE8 0014	H'1FE8 0014	8	Undefined	Undefined	Held	Held	Pclk
SCIF	SCFCR2	H'FFE8 0018	H'1FE8 0018	16	H'0000	H'0000	Held	Held	Pclk
SCIF	SCFDR2	H'FFE8 001C	H'1FE8 001C	16	H'0000	H'0000	Held	Held	Pclk
SCIF	SCSPTR2	H'FFE8 0020	H'1FE8 0020	16	H'0000*2	H'0000*2	Held	Held	Pclk
SCIF	SCLSR2	H'FFE8 0024	H'1FE8 0024	16	H'0000	H'0000	Held	Held	Pclk

Hitachi-UDI	SDIR	H'FFF0 0000	H'1FF0 0000	16	H'FFFF*2	Held	Held	Held	Pclk
Hitachi-UDI	SDDR	H'FFF0 0008	H'1FF0 0008	32	Held	Held	Held	Held	Pclk

**Note:** With control registers, the above addresses in the physical page number field can be accessed by means of a TLB setting. When these addresses are referenced directly without using the TLB, operations are limited.  
Includes undefined bits. See the descriptions of the individual modules.  
Use word-size access when writing. Perform the write with the upper byte set to H'5A or H'A5, respectively. Byte- and longword-size writes cannot be used.  
Use byte-size access when reading.





## B. Instruction Prefetch Side Effects

The SH4 is provided with an internal buffer for holding pre-read instructions, and always performs pre-reading. Therefore, program code must not be located in the last 20-byte area of any memory space. If program code is located in these areas, the memory area will be exceeded and a bus access for instruction pre-reading may be initiated. A case in which this is a problem is shown below.

Figure 1: Instruction Prefetch

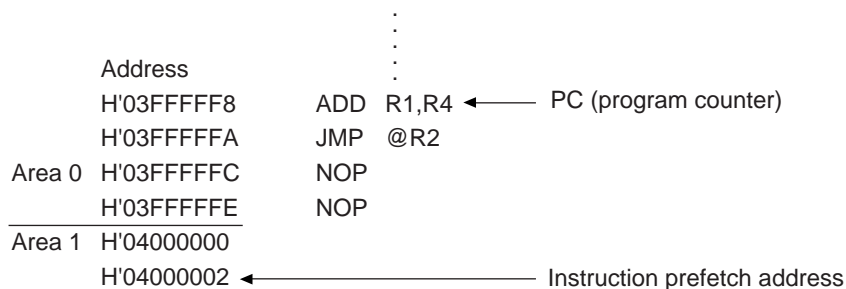


Figure B.1 presupposes a case in which the instruction (ADD) indicated by the program counter (PC) and the address H'04000002 instruction prefetch are executed simultaneously. It is also assumed that the program branches to an area outside area 1 after executing the following JMP instruction and delay slot instruction.

In this case, the program flow is unpredictable, and a bus access (instruction prefetch) to area 1 may be initiated.

### Instruction Prefetch Side Effects

- 1) It is possible that an external bus access caused by an instruction prefetch may result in misoperation of an external device, such as a FIFO, connected to the area concerned.
- 2) If there is no device to reply to an external bus request caused by an instruction prefetch, hangup will occur.

### Remedies

- 1) These illegal instruction fetches can be avoided by using the MMU.
- 2) The problem can be avoided by not locating program code in the last 20 bytes of any area.







